

Guideline

MOBOTIX Object Recognition App

© 2024 MOBOTIX AG

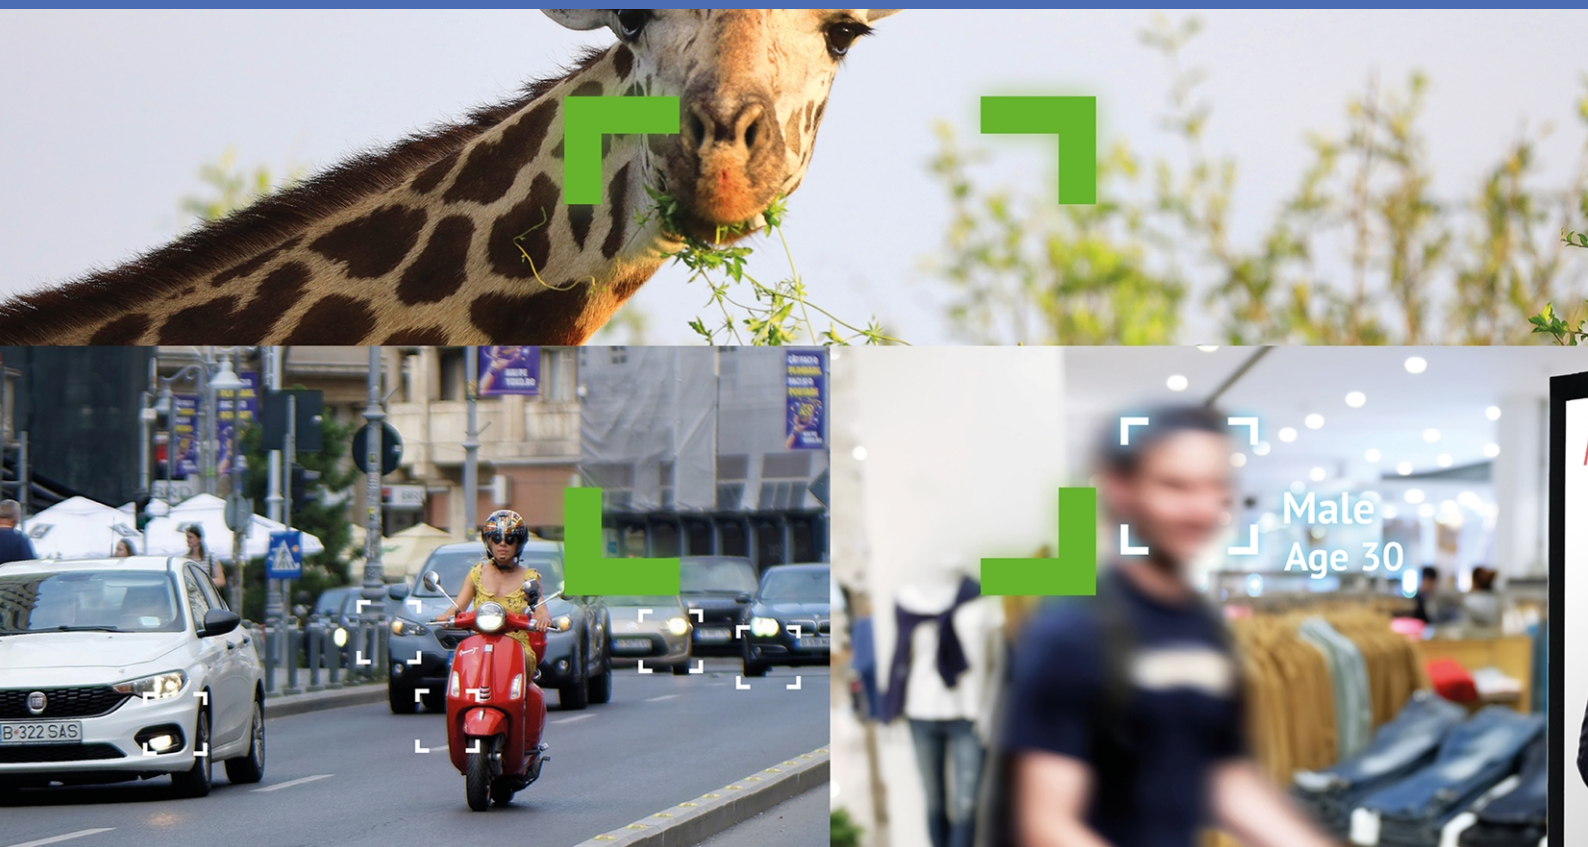


Table of Contents

Table of Contents	2
Before You Start	3
Support	4
MOBOTIX Support	4
MOBOTIX eCampus	4
MOBOTIX Community	4
Safety Notes	5
Legal Notes	5
About MOBOTIX Object Recognition App	7
Smart Data Interface to MxManagementCenter	7
Technical Specifications	8
Licensing Certified Apps	10
Set Camera into AI Mode	11
Activation of the Certified App Interface	12
Configuration of MOBOTIX Object Recognition App	13
Basic Settings	13
Detection Areas	14
MxMessageSystem	15
What is MxMessageSystem?	15
Facts about MxMessages	15
Basic configuration: Processing the automatically generated app events	16
Checking automatically generated app events	16
Action handling - Configuration of an Action Group	17
Action settings - Configuration of the camera recordings	19
Advanced Configuration: Processing the meta data transmitted by apps	21
Meta data transferred within the MxMessageSystem	21
Creating a Custom Message Event	22
Examples for message names and filter values of the MOBOTIX Object Recognition App	23

Before You Start

Support	4
Safety Notes	5
Legal Notes	5

Support

MOBOTIX Support

If you need technical support, please contact your MOBOTIX dealer. If your dealer cannot help you, he will contact the support channel to get an answer for you as quickly as possible.

If you have internet access, you can open the MOBOTIX help desk to find additional information and software updates.

Please visit www.mobotix.com > [Support](#) > [Help Desk](#).



MOBOTIX eCampus

The MOBOTIX eCampus is a complete e-learning platform. It lets you decide when and where you want to view and process your training seminar content. Simply open the site in your browser and select the desired training seminar.

Please visit www.mobotix.com/ecampus-mobotix.



MOBOTIX Community

The MOBOTIX community is another valuable source of information. MOBOTIX staff and other users are sharing their information, and so can you.

Please visit community.mobotix.com.



Safety Notes

- This camera must be installed by qualified personnel and the installation should conform to all local codes.
- This product must not be used in locations exposed to the dangers of explosion.
- Do not use this product in a dusty environment.
- Protect this product from moisture or water entering the housing.
- Install this product as outlined in this document. A faulty installation can damage the product!
- Do not replace batteries of the camera. If a battery is replaced by an incorrect type, the battery can explode.
- External power supplies must comply with the Limited Power Source (LPS) requirements and share the same power specifications with the camera.
- When using a power adapter, the power cord shall be connected to a socket-outlet with proper ground connection.
- To comply with the requirements of EN 50130-4 regarding the power supply of alarm systems for 24/7 operation, it is highly recommended to use an uninterruptible power supply (UPS) for backing up the power supply of this product.

Legal Notes

Legal Aspects of Video and Sound Recording

You must comply with all data protection regulations for video and sound monitoring when using MOBOTIX AG products. Depending on national laws and the installation location of the cameras, the recording of video and sound data may be subject to special documentation or it may be prohibited. All users of MOBOTIX products are therefore required to familiarize themselves with all applicable regulations and to comply with these laws. MOBOTIX AG is not liable for any illegal use of its products.

Declaration of Conformity

The products of MOBOTIX AG are certified according to the applicable regulations of the EC and other countries. You can find the declarations of conformity for the products of MOBOTIX AG on www.mobotix.com under **Support > Download Center > Marketing & Documentation > Certificates & Declarations of Conformity**.

RoHS Declaration

The products of MOBOTIX AG are in full compliance with European Unions Restrictions of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment (RoHS Directive 2011/65/EC) as far as they are subject to these regulations (for the RoHS Declaration of MOBOTIX, please see www.mobotix.com, **Support > Download Center > Marketing & Documentation > Brochures & Guides > Certificates**).

Disposal

Electrical and electronic products contain many valuable materials. For this reason, we recommend that you dispose of MOBOTIX products at the end of their service life in accordance with all legal requirements and regulations (or deposit these products at a municipal collection center). MOBOTIX products must not be disposed of in household waste! If the product contains a battery, please dispose of the battery separately (the corresponding product manuals contain specific directions if the product contains a battery).

Disclaimer

MOBOTIX AG does not assume any responsibility for damages, which are the result of improper use or failure to comply to the manuals or the applicable rules and regulations. Our General Terms and Conditions apply. You can download the current version of the **General Terms and Conditions** from our website at www.mobotix.com by clicking on the corresponding link at the bottom of every page.

It is the User's responsibility to comply with all applicable local, state, national and foreign laws, rules, treaties and regulations in connection with the use of the Software and Product, including those related to data privacy, the Health Insurance Portability and Accountability Act of 1996 (HIPPA), international communications and the transmission of technical or personal data.

About MOBOTIX Object Recognition App

Object Recognition and Classification Based on Artificial Intelligence

The app's artificial intelligence-based algorithms collect behavioral data on persons, animals and vehicles. The detected objects can be widely classified and color-coded. Furthermore movements in defined restricted areas can be detected.

- Free of charge and license-free.
- Motion detection and object classification in (defined) restricted areas.
- The provides essential AI-based analytics functions for other MOBOTIX apps.
- MOBOTIX events via MxMessageSystem.
- Can be used with all cameras of the MOBOTIX 7 system platform.

Best suited for the requirements of the following industries:

Utilities, Energy & Mining; Industry & Production, Government, Traffic & Transportation, Retail, Healthcare, Education & Science.

CAUTION! Thermal sensors are not supported by this app.

Smart Data Interface to MxManagementCenter

This app has a Smart Data interface to MxManagementCenter.

With the MOBOTIX Smart Data System, transaction data can be linked to the video recordings made at the time of the transactions. Smart Data source can be e.g. MOBOTIX Certified Apps (no license required) or general Smart Data sources (license required) like POS systems or license plate recognition systems.

The Smart Data System in MxManagementCenter enables you to quickly find and review any suspicious activities. The Smart Data Bar and the Smart Data View are available for searching and analyzing transactions. The Smart Data Bar provides a direct overview of the most recent transactions (from the last 24 hours) and for this reason it is convenient to use it for reviews and searches.

NOTE! For information on how to use the Smart Data System, see the corresponding online help of the camera software and MxManagementCenter.

Technical Specifications

Product Information

Product Name	MOBOTIX Object Recognition App
Supported MOBOTIX Cameras	Mx-M73A, Mx-S74A
Minimum Camera Firmware	V7.0.6.x
MxManagementCenter Integration	<ul style="list-style-type: none"> ▪ min. MxMC v2.4 ▪ Advanced Config license required

Product Features

App Features	<p>Analytics features:</p> <ul style="list-style-type: none"> ▪ Deep learning object recognition as basis for MxAnalytics features ▪ Restricted Area (Motion Detection) <p>Basicfeatures:</p> <ul style="list-style-type: none"> ▪ time table to enable MxAnalytics only within defined schedules (e.g. opening hours) ▪ MOBOTIX events via MxMessageSystem
Recognized objects	<ul style="list-style-type: none"> ▪ Persons ▪ Vehicles: Car, Truck, Bus, Motorcycle, Bicycle, Boat, Airplane, Train ▪ Animals: Bird, Cat, Dog, Horse, Sheep, Cow, Elephant, Bear, Zebra, Giraffe
Supported image sensor types	Day, Night, Day/Night
Dual / Multi Sensor usage	No
MxMessageSystem supported	Yes
MOBOTIX events	Yes
ONVIF Events	Yes (Generic Message events)

Hardware Requirements

Camera Sensor Connector Connector 1 (Only one image sensor usable)

Scene Requirements for Object Recognition

Recommended camera position wall mounted

Recommended
installation height (camera) 2m - 4m

Recommended viewing angle on object 0° - 30° (wall mount perspective)

Minimum object size 1/10 of image height

Technical App Specifications

Synchronous / Asynchronous
Asynchronous App

Detection accuracy Person: > 90%
 Vehicle: > 80%

Counting accuracy > 90%

Processed number
of frames per second typ. 5 fps

Licensing Certified Apps

There is no license required for MOBOTIX Object Recognition App.

The usage period begins with activation of the app interface (see [Activation of the Certified App Interface, p. 12](#))

NOTE! For buying or renewing a license, contact your MOBOTIX Partner.

NOTE! Apps are usually pre-installed with the firmware. In rare cases, apps must be downloaded from the website and installed. In this case see www.mobotix.com > [Support](#) > [Download Center](#) > [Marketing & Documentation](#), download and install the app.

Set Camera into AI Mode

The MOBOTIX Object Recognition App the camera to run in AI mode.

1. In the camera web interface, open: **Admin Menu / Hardware Configuration /**

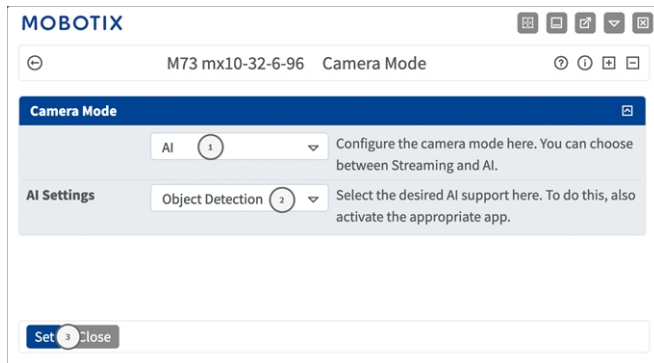


Fig. 1: Camera Mode Settings

2. Under **Camera Mode** select **AI** ① .
3. Under **AI Settings** select **Object Recognition** ② .
4. Decide how to store the configuration ③ :
 - Click on the **Set** button to activate your settings and to save them until the next reboot of the camera.
 - Click on the **Close** button to close the dialog. While closing the dialog, the system checks the entire configuration for changes. If changes are detected, you will be asked if you would like to store the entire configuration permanently.

Activation of the Certified App Interface

CAUTION! The MOBOTIX Object Recognition App does not consider obscure areas defined for the live image. Therefore there is no pixelation in obscure areas while configuring the app and during image analysis by the app.

NOTE! The user must have access to the setup menu ([http\(s\)://<camera IP address>/control](http(s)://<camera IP address>/control)). Therefore check the user rights of the camera.

1. In the camera web interface, open: **Setup Menu / Certified App Settings** ([http\(s\)://<camera IP address>/control/app_config](http(s)://<camera IP address>/control/app_config)).

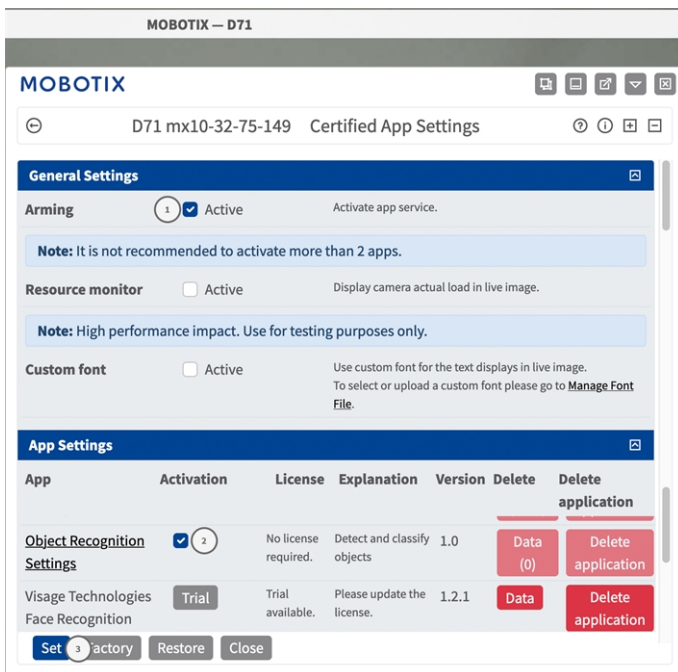


Fig. 2: Certified App: Settings

2. Under **General Settings** activate the **Arming** ① of the app service.
3. Under **App Settings** check the **Active** option ② and click **Set** ③ .
4. Click on the name of the App to be configured to open the Apps user interface.
5. For configuration of the App see [Configuration of MOBOTIX Object Recognition App, p. 13](#).

Configuration of MOBOTIX Object Recognition App

NOTE! The user must have access to the setup menu ([http\(s\)://<camera IP address>/control](http(s)://<camera IP address>/control)). Therefore check the user rights of the camera.

1. In the camera web interface, open: **Setup Menu / Certified App Settings** ([http\(s\)://<camera IP address>/control/app_config](http(s)://<camera IP address>/control/app_config)).
2. Click on the name of the **MOBOTIX Object Recognition App**.

The configuration window of the app appears with the following options:

Basic Settings

The following configurations should be taken into account:

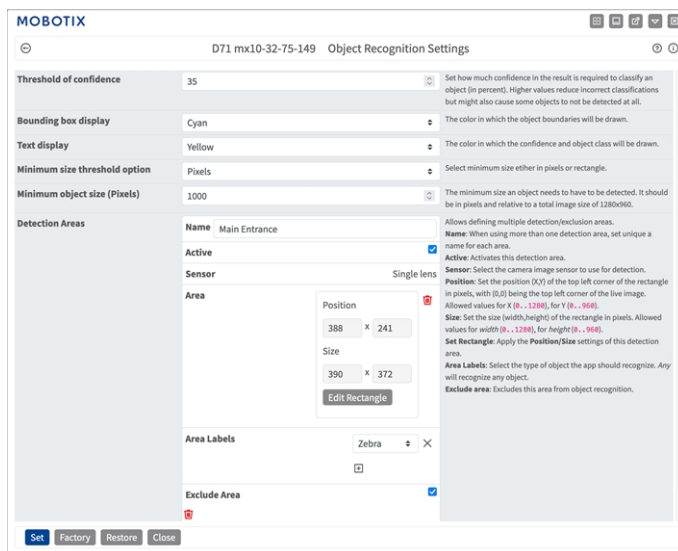


Fig. 3: Basic settings

Threshold of confidence: Set a percentage confidence value that is the minimum required for the analysis result to classify an object. Higher values reduce false classifications, but may also result in some objects not being recognized.

Bounding box display: The color of the text describing the confidence and object class.

Text display: Bounding box display.

Minimum size threshold option: Select minimum size either as pixel or as rectangle.

Minimum object size: The minimum size in pixels that an object must have in order to be recognized (based on a total image size of 1280x960 px).

Detection Areas

Unless otherwise specified, object detection always takes place in the entire image. You can define detection areas within the camera image as well as excluded areas.

Name: Set an unique name for each area.

Active: Check to activate the area.

Sensor: Select the camera image sensor for detections.

Area Position: Set the position (X,Y) of the top left corner of the rectangle in pixels, with (0,0) being the top left corner of the live image. Allowed values for X (0..1280), for Y (0..960).

Area Size: Set the size (width, height) of the rectangle in pixels. Allowed values for width (0..1280), for height (0..960).

Area Labels: Select an Area label for the Excluded Area or click the **plus** icon ① to add multiple labels.

Excluded Areas Check to exclude this area from object recognition.

Editing an Detection Area

1. Click **Edit Rectangle** ② to switch into the live image.
2. In the live view simply click and drag a rectangular excluded area.
3. Drag the corner points to refine the Excluded area.
4. In the top right corner of the live view click **Submit** to adopt the coordinates of the rectangle.
5. Optionally click the **bin** icon ③ to delete the recognition area.

MxMessageSystem

What is MxMessageSystem?

MxMessageSystem is a communication system based on name oriented messages. This means that a message must have a unique name with a maximum length of 32 bytes.

Each participant can send and receive messages. MOBOTIX cameras can also forward messages within the local network. This way, MxMessages can be distributed over the entire local network (see Message Area: Global).

For example, a MOBOTIX 7 series camera can exchange a MxMessage generated by a camera app with an Mx6 camera that does not support certified MOBOTIX apps.

Facts about MxMessages


- 128-bit encryption ensures privacy and security of message content.
- MxMessages can be distributed from any camera of the Mx6 and 7 series.
- The message range can be defined individually for each MxMessage.
 - **Local:** Camera expects a MxMessage within its own camera system (e.g. through a Certified App).
 - **Global:** the camera expects a MxMessage that is distributed in the local network by another MxMessage device (e.g. another camera of the 7 series equipped with a certified MOBOTIX app).
- Actions that the recipients are to perform are configured individually for each participant of the MxMessageSystem.

Basic configuration: Processing the automatically generated app events

Checking automatically generated app events

NOTE! After successfully activating the app (see [Activation of the Certified App Interface, p. 12](#)), a generic message event for this specific app is automatically generated in the camera.


1. Go to **Setup-Menu / Event Control / Event Overview**. In section **Message Events** the automatically generated message event profile is named after the application (e.g. ObjRec).

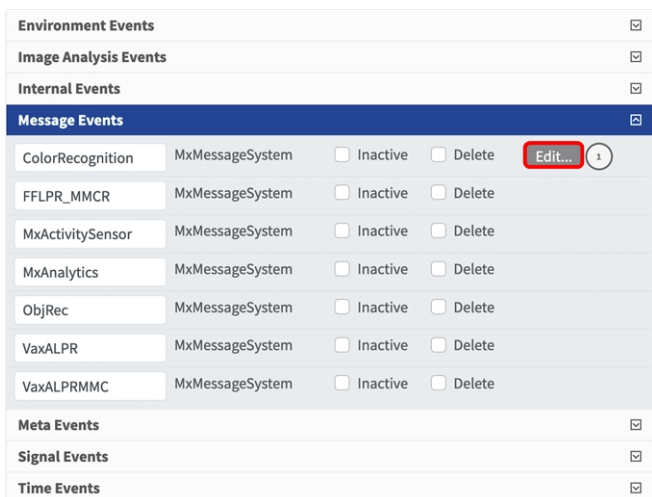

Environment Events				☒
Image Analysis Events				☒
Internal Events				☒
Message Events				☒
ColorRecognition	MxMessageSystem	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete	Edit... 1
FFLPR_MMCR	MxMessageSystem	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete	
MxActivitySensor	MxMessageSystem	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete	
MxAnalytics	MxMessageSystem	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete	
ObjRec	MxMessageSystem	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete	
VaxALPR	MxMessageSystem	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete	
VaxALPRMMC	MxMessageSystem	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete	
Meta Events				☒
Signal Events				☒
Time Events				☒

Fig. 4: Example: Generic message event from MOBOTIX Object Recognition App

- Click **Edit**  to display and configure the event properties in detail.

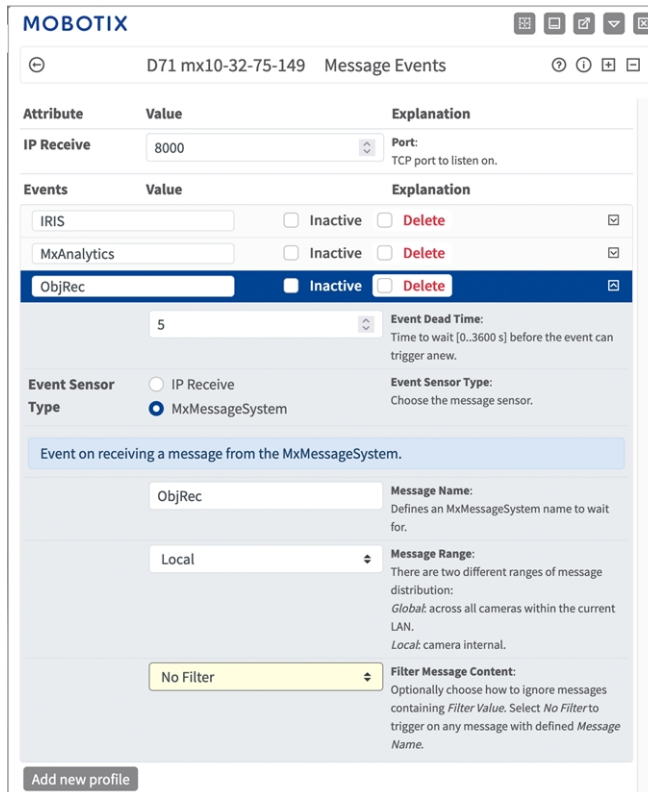

MOBOTIX

D71 mx10-32-75-149 Message Events

Attribute	Value	Explanation
IP Receive	8000	Port: TCP port to listen on.

Events	Value	Explanation
IRIS	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete
MxAnalytics	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete
ObjRec	<input checked="" type="checkbox"/> Inactive	<input type="checkbox"/> Delete

Event Dead Time: 5
Time to wait [0..3600 s] before the event can trigger anew.

Event Sensor Type: MxMessageSystem
Choose the message sensor.

Event on receiving a message from the MxMessageSystem.

Message Name: ObjRec
Defines an MxMessageSystem name to wait for.

Message Range: Local
There are two different ranges of message distribution:
Global: across all cameras within the current LAN.
Local: camera internal.

Filter Message Content: No Filter
Optionally choose how to ignore messages containing *Filter Value*. Select *No Filter* to trigger on any message with defined *Message Name*.

Add new profile

Fig. 5: Example: Generic message event details - no filter

Action handling - Configuration of an Action Group

CAUTION! To use events, trigger Action Groups or record images the general arming of the camera must be enabled ([http\(s\)/<camera IP address>/control/settings](http(s)/<camera IP address>/control/settings))

An Action Group defines which action(s) is (are) triggered by the MOBOTIX Object Recognition App event.

- Go to **Setup-Menu / Event Control / Event Overview / Action Group Overview** ([http\(s\)://<camera IP address>/control/actions](http(s)://<camera IP address>/control/actions)).

Basic configuration: Processing the automatically generated app events

Action handling - Configuration of an Action Group

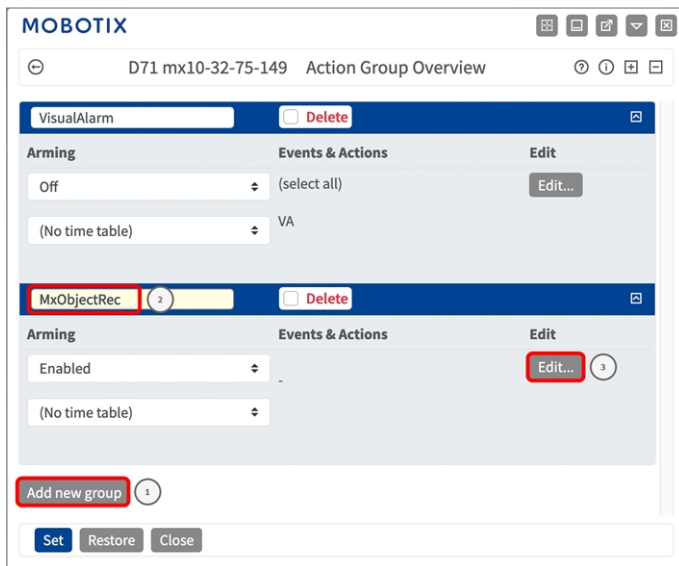


Fig. 6: Defining Action Groups

2. Click **Add new group** ① and give a meaningful name ② .
3. Click **Edit** ③ , to configure the group.

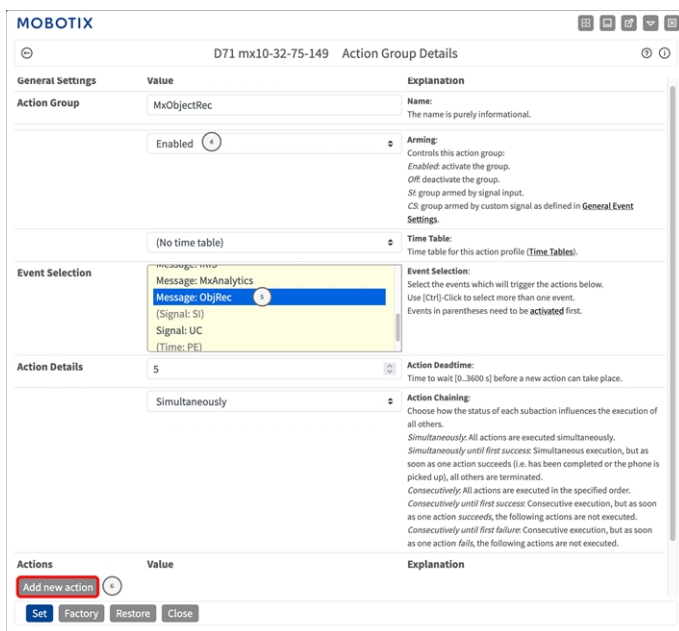


Fig. 7: Configuring an Action Group

4. Enable **Arming** ④ of the Action Group.
5. Select your message event in the **Event selection** list ⑤ . To select multiple events, hold the shift key.
6. Click **Add new Action** ⑥ .
7. Select a proper action from list **Action Type and Profile** ⑦ .

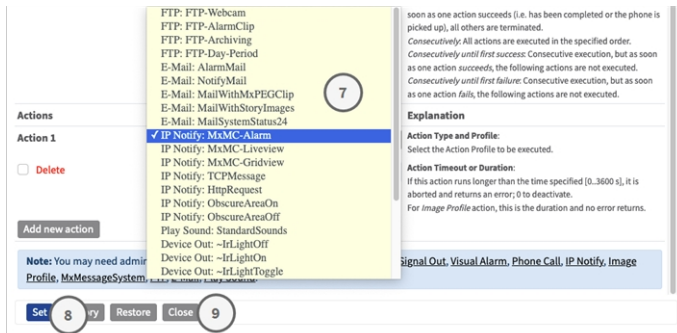


Fig. 8: Select Action Type- and Profile

NOTE! If the required action profile is not yet available, you can create a new profile in the Admin Menu sections "MxMessageSystem", "Transfer Profiles" and "Audio and VoIP Telephony".

If necessary, you can add further actions by clicking the button again. In this case, please make sure that the "action chaining" is configured correctly (e.g. at the same time).

8. Click on the **Set** ⁸ button at the end of the dialog box to confirm the settings.
9. Click on **Close** ⁹ to save your settings permanently.

Action settings - Configuration of the camera recordings

1. Go to **Setup Menu / Event Control / Recording** ([http\(s\)/<camera IP address>/control/recording](http(s)/<camera IP address>/control/recording)).

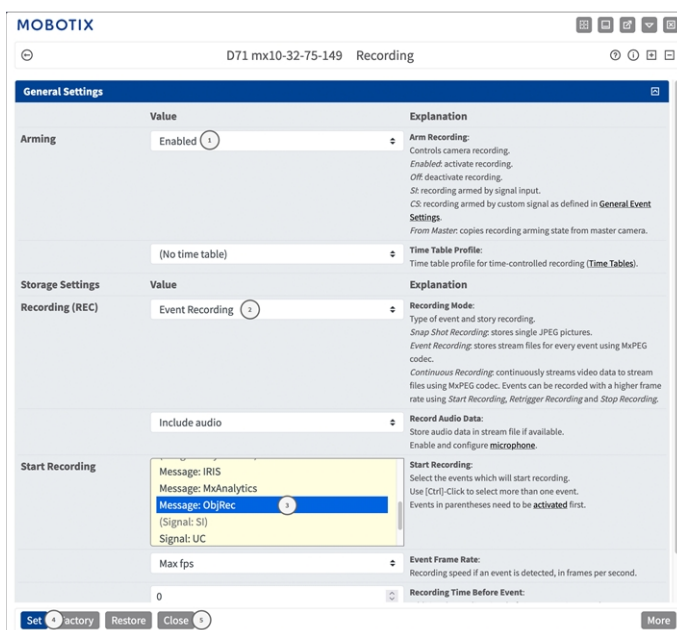


Fig. 9: Configuration of camera recording settings


2. Activate **Arm Recording**① .
3. Under **Storage Settings / Recording (REC)** select a **Recording mode**② . The following modes are available:
 - Snap Shot Recording
 - Event Recording
 - Continuous Recording
4. In list **Start recording**③ select the message event just created.
5. Click on the **Set**④ button at the end of the dialog box to confirm the settings.
6. Click on **Close**⑤ to save your settings permanently.

NOTE! Alternatively, you can save your settings in the Admin menu under Configuration / Save current configuration to permanent memory.

Advanced Configuration: Processing the meta data transmitted by apps

Meta data transferred within the MxMessageSystem

For each event, the app also transfers meta data to the camera. This data is sent in the form of a JSON schema within a MxMessage.

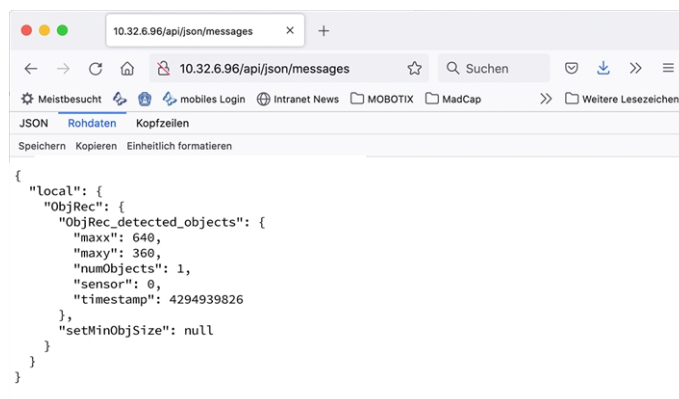A screenshot of a web browser window displaying a JSON message structure. The browser's address bar shows the URL '10.32.6.96/api/json/messages'. The page content shows a JSON object with a 'local' property containing an 'ObjRec' object. The 'ObjRec' object has a 'detected_objects' property with a nested object containing 'maxy', 'maxy', 'numObjects', 'sensor', and 'timestamp' values. The 'setMinObjSize' property is set to null.

```
{
  "local": {
    "ObjRec": {
      "ObjRec_detected_objects": {
        "maxy": 640,
        "maxy": 360,
        "numObjects": 1,
        "sensor": 0,
        "timestamp": 4294939826
      },
      "setMinObjSize": null
    }
  }
}
```

NOTE! To view the meta data structure of the last App event, enter the following URL in the address bar of your browser: [http\(s\)://IPAdresseOfYourCamera/api/json/messages](http(s)://IPAdresseOfYourCamera/api/json/messages)

Creating a Custom Message Event

1. Go to **Setup-Menu / Event Control / Event Overview**. In section **Message Events** the automatically generated message event profile is named after the application (e.g. ObjRec).

Environment Events				
Image Analysis Events				
Internal Events				
Message Events				
ColorRecognition	MxMessageSystem	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete	Edit... ①
FFLPR_MMCR	MxMessageSystem	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete	
MxActivitySensor	MxMessageSystem	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete	
MxAnalytics	MxMessageSystem	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete	
ObjRec	MxMessageSystem	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete	
VaxALPR	MxMessageSystem	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete	
VaxALPRMMC	MxMessageSystem	<input type="checkbox"/> Inactive	<input type="checkbox"/> Delete	
Meta Events				
Signal Events				
Time Events				

Fig. 10: Example: Generic message event from MOBOTIX Object Recognition App

2. Click **Edit** ① to display and configure the event properties in detail.

The screenshot shows the configuration page for the 'ObjRec' event. The top bar indicates 'D71 mx10-32-75-149 Message Events'. The event is currently 'Inactive'. The configuration includes:

- Event Sensor Type:** MxMessageSystem (selected), IP Receive, MQTT Subscription.
- Event Dead Time:** 5 (Time to wait [0..3600 s] before the event can trigger anew).
- Message Name:** ObjRec.ObjRec_frame_info.totalNumObjects (Defines an MxMessageSystem name to wait for).
- Message Range:** Local (There are two different ranges of message distribution: Global across all cameras within the current LAN, Local camera intranet).
- Filter Message Content:** JSON Comparison (Optionally choose how to ignore messages containing Filter Value. Select No Filter to trigger on any message with defined Message Name. The Boolean Filter triggers on JSON values true/false, or 1/0, and for some JSON strings like "on"/"off", "yes"/"no". For JSON Comparison, Regular Expression, Value Filter, and Interval Notation define the compared value as Filter Value below).
- Filter Value:** 2 (Define either a valid reference value as a string (in JSON format) without line breaks, or an extended regular expression, a number, or a minimum/maximum interval [a:b]. Open help for examples).

Fig. 11: Object Recognition Event

3. Click on the event (e.g. ObjRec) to open the event settings.
4. Configure the parameters of the event profile as follows:
 - **Message Name:** Enter the "Message Name" ② according to the event documentation of the corresponding app (see [Examples for message names and filter values of the MOBOTIX Object Recognition App, p. 23](#))

- **Message Range:**
 - Local: Default settings for the MOBOTIX Object Recognition App
 - **Global:** (MxMessage is forwarded from another MOBOTIX camera in the local network.)
- **Filter Message Content:**
 - **No Filter:** Trigger on any message according to the defined **Message Name**.
 - **JSON Comparison:** Select if filter values are to be defined in JSON format.
 - **Regular Expression:** Select if filter values are to be defined as regular expression.
- **Filter Value:**③ see [Examples for message names and filter values of the MOBOTIX Object Recognition App, p. 23.](#)

CAUTION! “Filter Value“ is used to differentiate the MxMessages of an app / bundle. Use this entry to benefit from individual event types of the apps (if available).

Choose “No Filter” if you want to use all incoming MxMessages as generic event of the related app.

2. Click on **Set**④ at the end of the dialog box to confirm the settings.
3. Click on **Close**⑤ to save your settings permanently.

Examples for message names and filter values of the MOBOTIX Object Recognition App

MxMessage Name	Filter Value	Explanation
ObjRec.ObjRec_frame_info.car	"2"	Message event is triggered when exactly 2 cars were detected in the frame
ObjRec.ObjRec_frame_info.totalNumObjects	"3"	Message Event is triggered if any 3 objects were detected in the frame

MOBOTIX

BeyondHumanVision

[EN_10/24](#)

MOBOTIX AG • Kaiserstrasse • D-67722 Langmeil • Tel.: +49 6302 9816-103 • sales@mobotix.com • www.mobotix.com

MOBOTIX is a trademark of MOBOTIX AG registered in the European Union, the U.S.A., and in other countries. Subject to change without notice. MOBOTIX do not assume any liability for technical or editorial errors or omissions contained herein. All rights reserved. © MOBOTIX AG 2020