Product Overview

24.01.2025 English EUR



BeyondHumanVision

MOBOTIX

All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX • 24.01.2025 • MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025 мовотіх

IoT Video Systems Outdoor

BeyondHumanVision

All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX • 24.01.2025 • MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025

MOBOTIX

-2-

ONE M1A Single IP Camera

	Article No. / Name / Description	EAN / HS / weight	dimen.
	Mx-ONE-M1A-S-8DN040	4047438048446	29,6 cm
0 2	M1A-S with 4K DN040 (Day/Night), 120°x60°	85258900	19,6 cm
(a	M1A-Single IP camera equipped with one premium wide-angle lens B040 and IR cut	1.500 g	18,0 cm
	filter for day and night use, aperture: f/1.8, max. image angle (HxV): 120°x60° · Max. image size: 4K UHD (3840 x 2160 pixels), 16:9 • max. frame rate: 30 fps @ 4K • ONVIF- S-compliant (Profile G, S, T) MOBOTIX ONE system platform with H.264 (Triple Streaming), H.265, MxPEG + and M-JPEG • WDR: up to 120dB, IR LEDs (up to 30m) • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, shock detector • Functional extensions (via optional MOBOTIX modules): 1x USB-C compatible with P7 extension boxes • Operating conditions: IP66/IK10, -40 to 65°C (-40 to 149°F) • Internal DVR: 64 GB microSD (for MxPEG + recordings) • Max. Power consumption: 12.95 W, supply via network cable, POE Class 3 (IEEE 802.3af) or 12/24VDC external power supply • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), I/0 (1x input, 2x outputs), 1x audio out, 1x 12/24VDC input, 1x USB-C • Software interface for MOBOTIX Camera Apps (based on Deep Learning) • Housing: PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)		10,4 l



Mx-ONE-M1A-S-8DN050 4047438048453 29,6 cm M1A-S with 4K DN050 (Day/Night), 95°x50° 85258900 19,6 cm M1A-Single IP camera equipped with one premium wide-angle lens B050 and IR cut 1.500 9 18,0 cm filter for day and night use, aperture: f/1.8, max. image angle (HxV): 95°x50° • Max. 10,4 l image size: 4K UHD (3840 x 2160 pixels), 16:9 • max. frame rate: 30 fps @ 4K • ONVIF-S-compliant (Profile G, S, T) MOBOTIX ONE system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • WDR: up to 120dB, IR LEDs (up to 30m) • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, shock detector • Functional extensions (via optional MOBOTIX modules): 1x USB-C compatible with P7 extension boxes • Operating conditions: IP66/IK10, -40 to 65°C (-40 to 149 °F) • Internal DVR: 64 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 12.95 W, supply via network cable, PoE Class 3 (IEEE 802.3af) or 12/24VDC external power supply • Connections: 1x RJ45 jack for

4047438048460

85258900

1.500 g

29,6 cm

19,6 cm

18,0 cm

10,4 l

Mx-ONE-M1A-S-8DN080 M1A-S with 4K DN080 (E M1A-Single IP camera equipped w filter for day and night use, apertu image size: 4K UHD (3840 x 2160 g S-compliant (Profile G, S, T) MOB Streaming), H.265, MxPEG+ and M

M1A-S with 4K DN080 (Day/Night), 60°x33° M1A-Single IP camera equipped with one premium wide-angle lens B080 and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 60°x33° • Max. image size: 4K UHD (3840 x 2160 pixels), 16:9 • max. frame rate: 30 fps @ 4K • ONVIF-S-compliant (Profile G, S, T) MOBOTIX ONE system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • VDR: up to 120dB, IR LEDs (up to 30m) • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, shock detector • Functional extensions (via optional MOBOTIX modules): 1x USB-C compatible with P7 extension boxes • Operating conditions: IP66/IK10, -40 to 65°C (-40 to 149 °F) • Internal DVR: 64 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 12.95 W, supply via network cable, PoE Class 3 (IEEE 802.3af) or 12/24VDC external power supply • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), I/0 (1x input, 2x outputs), 1x audio out, 1x 12/24VDC input, 1x USB-C Software interface for MOBOTIX Camera Apps (based on Deep Learning) • Housing: PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)

weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), I/0 (1x input, 2x outputs), 1x audio out, 1x 12/24VDC input, 1x USB-C • Software interface for MOBOTIX Camera Apps (based on Deep Learning) • Housing: PBT-30GF •

Color: white • Warranty: 5 years (optionally extendable up to 8 years)

All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX • 24.01.2025 • MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025



Mx-ONE-M1A-S-8DN100

M1A-S with 4K DN100 (Day/Night), 45°x25° M1A-Single IP camera equipped with one premium normal lens B100 and IR cut filter for day and night use, aperture; f/1.8, max, image angle (HxV); 45°x25° • Max, image size: 4K UHD (3840 x 2160 pixels), 16:9 • max. frame rate: 30 fps @ 4K • ONVIF-Scompliant (Profile G, S, T) MOBOTIX ONE system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • WDR: up to 120dB, IR LEDs (up to 30m) • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, shock detector • Functional extensions (via optional MOBOTIX modules): 1x USB-C compatible with P7 extension boxes • Operating conditions: IP66/IK10, -40 to 65°C (-40 to 149 °F) • Internal DVR: 64 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 12.95 W, supply via network cable, PoE Class 3 (IEEE 802.3af) or 12/24VDC external power supply • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), I/O (1x input, 2x outputs), 1x audio out, 1x 12/24VDC input, 1x USB-C • Software interface for MOBOTIX Camera Apps (based on Deep Learning) • Housing: PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)

4047438048477 29,6 cm 85258900 19,6 cm e^{ter} 1.500 9 18,0 cm 10.4 l

Mx-ONE-M1A-S-8DN150

M1A-S with 4K DN150 (Day/Night), 30°x17°

M1A-Single IP camera equipped with one premium tele lens B150 and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 30°x17° • Max. image size: 4K UHD (3840 x 2160 pixels), 16:9 • max. frame rate: 30 fps @ 4K • ONVIF-S-compliant (Profile G, S, T) MOBOTIX ONE system platform with H.264 (Triple Streaming), H.265, MXPEG+ and M-JPEG • WDR: up to 120dB, IR LEDs (up to 30m) • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, shock detector • Functional extensions (via optional MOBOTIX modules): 1x USB-C compatible with P7 extension boxes • Operating conditions: IP66/IK10, -40 to 65°C (-40 to 149° F) • Internal DVR: 64 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 12.95 W, supply via network cable, PoE Class 3 (IEEE 802.3af) or 12/24VDC external power supply • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), I/0 (1x input, 2x outputs), 1x audio out, 1x 12/24VDC input, 1x USB-C • Software interface for MOBOTIX Camera Apps (based on Deep Learning) • Housing: PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)

1047438048484	29,6 cm
85258900	19,6 cm
1.500 9	18,0 cm
	10,4 l



Mx-ONE-M1A-S-8DN280

M1A-S with 4K DN280 (Day/Night), 15°x8,5°

M1A-Single IP camera equipped with one premium tele lens B280 and IR cut filter for day and night use, aperture: f1.8, max. image angle (HxV): 15%8,5° Max. image size: 4K UHD (3840 x 2160 pixels), 16:9 · max. frame rate: 30 fps @ 4K · ONVIF-S-compliant (Profile G, S, T) MOBOTIX ONE system platform with H.264 (Triple Streaming), H.265, MXPEG+ and M-JPEG · WDR: up to 120dB, IR LEDs (up to 30m) · HD Audio with integrated microphone and speaker · Temperature sensor, MxActivitySensor, shock detector · Functional extensions (via optional MOBOTIX modules): Lx USB-C compatible with P7 extension boxes · Operating conditions: IP66/IK10, -40 to 65°C (-40 to 149 °F) · Internal DVR: 64 GB microSD (for MxPEG+ recordings) · Max. Power consumption: 12.95 W, supply via network cable, PoE Class 3 (IEEE 802.3af) or 12/24VDC external power supply · Connections: Lx RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), I/0 (Lx input, 2x outputs), 1x audio out, 1x 12/24VDC input, 1x USB-C · Software interface for MOBOTIX Camera Apps (based on Deep Learning) · Housing: PBT-30GF · Color: white • Warranty: 5 years (optionally extendable up to 8 years)

4047438048491	29,6 cm
85258900	19,6 cm
1.500 g	18,0 cm
	10,4 l



Mx-ONE-M1A-S-8DNTELE

M1A-S with 4K DN Tele Varifocal (Day/Night), 42° - 15°

M1A-Single IP camera equipped with one premium motorized tele varifocal lens and IR cut filter for day and night use, aperture: f/1,7, image angle H: 42°-15°, V:22,8°-8,4° focal length: 11-29 mm • Max. image size: 4K UHD (3840 x 2160 pixels), 16:9 • max. frame rate: 30 fps @ 4K • ONVIE-S-compliant (Profile G. S. T) MOBOTIX ONE system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • WDR: up to 120dB, IR LEDs (up to 30m) • HD Audio with integrated microphone and speaker Temperature sensor, MxActivitySensor, shock detector • Functional extensions (via optional MOBOTIX modules): 1x USB-C compatible with P7 extension boxes • Operating conditions: IP66/IK10, -40 to 65°C (-40 to 149 °F) • Internal DVR: 64 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 12.95 W, supply via network cable, PoE Class 3 (IEEE 802.3af) or 12/24VDC external power supply • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), I/0 (1x input, 2x outputs), 1x audio out, 1x 12/24VDC input, 1x USB-C • Software interface for MOBOTIX Camera Apps (based on Deep Learning) • Housing: PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)

4047438048422	29,6 cm
85258900	19,6 cm
1.550 9	18,0 cm
	10,4 l



Mx-ONE-M1A-S-8DNWIDE M1A-S with 4K DN Wide Varifocal (Day/Night), 112° - 47,5°

M1A-Single IP camera equipped with one premium motorized wide varifocal lens and IR cut filter for day and night use, aperture: f/1.3, image angle H: 112°-47.5°. V:58°-26,6° • focal length: 4.3-9.3 mm • Max. image size: 4K UHD (3840 x 2160 pixels), 16:9 • max. frame rate: 30 fps @ 4K • ONVIF-S-compliant (Profile G, S, T) MOBOTIX ONE system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • WDR: up to 120dB, IR LEDs (up to 30m) • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, shock detector • Functional extensions (via optional MOBOTIX modules): 1x USB-C compatible with P7 extension boxes • Operating conditions: IP66/IK10, -40 to 65°C (-40 to 149 °F) • Internal DVR: 64 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 12.95 W, supply via network cable, PoE Class 3 (IEEE 802.3af) or 12/24VDC external power supply • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), I/0 (1x input, 2x outputs), 1x audio out, 1x 12/24VDC input, 1x USB-C • Software interface for MOBOTIX Camera Apps (based on Deep Learning) • Housing: PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)

4047438048439	29,6 cm
85258900	19,6 cm
1.500 g	18,0 cm
	10,4 l



Mx-ONE-M1A-S-8N040

M1A-S with 4K Night sensor, 120°x60°

M1A-Single IP camera equipped with one premium wide-angle lens B040 and B/W sensor for night use, aperture: f/1.8, max, image angle (HxV): 120°x60° • Max, image size: 4K UHD (3840 x 2160 pixels), 16:9 • max. frame rate: 30 fps @ 4K • ONVIF-Scompliant (Profile G, S, T) MOBOTIX ONE system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • WDR: up to 120dB, IR LEDs (up to 30m) • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, shock detector • Functional extensions (via optional MOBOTIX modules): 1x USB-C compatible with P7 extension boxes • Operating conditions: IP66/IK10, -40 to 65°C (-40 to 149 °F) • Internal DVR: 64 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 12.95 W, supply via network cable, PoE Class 3 (IEEE 802.3af) or 12/24VDC external power supply • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), I/O (1x input, 2x outputs), 1x audio out, 1x 12/24VDC input, 1x USB-C • Software interface for MOBOTIX Camera Apps (based on Deep Learning) • Housing: PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)

4047438048521	29,6 cm
85258900	19,6 cm
1.500 9	18,0 cm
	10,4 l

4047438048538

29.6 cm

Mx-ONE-M1A-S-8N050
M1A-S with 4K Night se
M1A-Single IP camera equipped sensor for night use, aperture: f, size: 4K UHD (3840 x 2160 pixels compliant (Profile G, S, T) MOBC Streaming), H.265, MxPEG+ and Audio with integrated micropho MxActivitySensor, shock detector

MX-ONE-MIA-3-8N050	4041430046336	29,0 CIII	
M1A-S with 4K Night sensor, 95°x50°	85258900	19,6 cm	
 M1A-Single IP camera equipped with one premium wide-angle lens B050 and B/W sensor for night use, aperture: f/1.8, max. image angle (HxV): 95°x50° • Max. image size: 4K UHD (3840 x 2160 pixels), 16:9 • max. frame rate: 30 fps @ 4K • ONVIF-S- compliant (Profile G, S, T) MOBOTIX ONE system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • WDR: up to 120dB, IR LEDs (up to 30m) • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, shock detector • Functional extensions (via optional MOBOTIX modules): 1x USB-C compatible with P7 extension boxes • Operating conditions: IP66/IK10, -40 to 65°C (-40 to 149°F) • Internal DVR: 64 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 12.95 W, supply via network cable, PoE Class 3 (IEEE 802.3af) or 12/24VDC external power supply • Connections: 1x IJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), I/0 (1x input, 2x outputs), 1x audio out, 1x 12/24VDC input, 1x USB-C • Software interface for MOBOTIX Camera Apps (based on Deep Learning) • Housing: PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)	1.500 9	18,0 cm 10,4 l	



Mx-ONE-M1A-S-8N080 4047438048545 29.6 cm M1A-S with 4K Night sensor, 60°x33° 85258900 19,6 cm M1A-Single IP camera equipped with one premium wide-angle lens B080 and B/W 1.500 g 18,0 cm sensor for night use, aperture: f/1.8, max. image angle (HxV): 60°x33° • Max. image 10,4 l size: 4K UHD (3840 x 2160 pixels), 16:9 • max, frame rate: 30 fps @ 4K • ONVIE-Scompliant (Profile G, S, T) MOBOTIX ONE system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • WDR: up to 120dB, IR LEDs (up to 30m) • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, shock detector • Functional extensions (via optional MOBOTIX modules): 1x USB-C compatible with P7 extension boxes • Operating conditions: IP66/IK10, -40 to 65°C (-40 to 149 °F) • Internal DVR: 64 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 12.95 W, supply via network cable, PoE Class 3 (IEEE 802.3af) or 12/24VDC external power supply • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), I/0 (1x input, 2x outputs), 1x audio out, 1x 12/24VDC input, 1x USB-C • Software interface for MOBOTIX Camera Apps (based on Deep Learning) • Housing: PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)

All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX • 24.01.2025 • MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025



Mx-ONE-M1A-S-8N100 M1A-S with 4K Night sensor, 45°x25°

M1A-Single IP camera equipped with one premium normal lens B100 and B/W sensor for night use, aperture: f/1.8, max. image angle (HxV): 45°x25° • Max. image size: 4K UHD (3840 x 2160 pixels), 16:9 • max. frame rate: 30 fps @ 4K • ONVIF-S-compliant (Profile G, S, T) MOBOTIX ONE system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • WDR: up to 120dB, IR LEDs (up to 30m) • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, shock detector • Functional extensions (via optional MOBOTIX modules): 1x USB-C compatible with P7 extension boxes • Operating conditions: IP66/IK10, -40 to 65° C (-40 to 149 °F) • Internal DVR: 64 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 12.95 W, supply via network cable, PoE Class 3 (IEEE 802.3af) or 12/24VDC external power supply • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), I/0 (1x input, 2x outputs), 1x Audio Out, 1x 12/24VDC input, 1x USB-C • Software interface for MOBOTIX Camera Apps (based on Deep Learning) • Housing: PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)

4047438048552 29,6 cm 85258900 19,6 cm 1.500 g 18,0 cm 10,4 l

Mx-ONE-M1A-S-8N150 M1A-S with 4K Night sensor, 30°x17°

M1A-Single IP camera equipped with one premium tele lens B150 and B/W sensor for night use, aperture: f/1.8, max. image angle (HxV): 30°x17° • Max. image size: 4K UHD (3840 x 2160 pixels), 16:9 • max. frame rate: 30 fps @ 4K • ONVIF-S-compliant (Profile G, S, T) MOBOTIX ONE system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • WDR: up to 120dB, IR LEDs (up to 30m) • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, shock detector • Functional extensions (via optional MOBOTIX modules): 1x USB-C compatible with P7 extension boxes • Operating conditions: IP66/IK10, -40 to 65°C (-40 to 149 °F) • Internal DVR: 64 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 12.95 W, supply via network cable, PoE Class 3 (IEEE 802.3af) or 12/24VDC external power supply • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), I/0 (1x input, 2x outputs), 1x mic In, 1x audio out, 1x 12/24VDC input, 1x USB-C • Software interface for MOBOTIX Camera Apps (based on Deep Learning) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)

4047438048569 29,6 cm 85258900 19.6 cm 1.500 9 18,0 cm 10,4 l

|--|--|--|--|

Mx-ONE-M1A-S-8N280 4 M1A-S with 4K Night sensor, 15°x8,5° M1A-Single IP camera equipped with one premium tele lens B280 and B/W sensor for night use, aperture: f/1.8, max. image angle (HxV): 15°x8,5° • Max. image size: 4K UHD (3840 x 2160 pixels), 16:9 • max, frame rate; 30 fps @ 4K • ONVIF-S-compliant (Profile G, S, T) MOBOTIX ONE system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • WDR: up to 120dB, IR LEDs (up to 30m) • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, shock detector • Functional extensions (via optional MOBOTIX modules): 1x USB-C compatible with P7 extension boxes \bullet Operating conditions: IP66/IK10, -40 to 65°C (-40 to 149 °F) \bullet Internal DVR: 64 GB microSD (for MxPEG+ recordings) • Max. Power consumption:

12.95 W. supply via network cable. PoF Class 3 (IFFF 802.3af) or 12/24VDC external power supply • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), I/0 (1x input, 2x outputs), 1x audio out, 1x 12/24VDC input, 1x USB-C • Software interface for MOBOTIX Camera Apps (based on Deep Learning) • Housing: PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)

1047438048576	29,6 cm
85258900	19,6 cm
1.500 g	18,0 cm
	10.4 l

M73A

MOBOTIX 7 Solution Platform

Weatherproof (IP66) Fixed Network Camera (Body) in two color variants, modular design with separately orderable optical 4K UHD image sensor modules (optimized for day, night or day & night use) and separately orderable function modules for easy insertion in the front panel (3 module openings, can be assigned as required), module connection via MOBOTIX sensor cables pre-positioned in the camera

1201	

Article No. / Name / Description	EAN / HS / weight	dimen.	
Mx-M73A-LSA	4047438036825	29,6 cm	
M73 Body with LSA Connector Box (white)	85258900	26,8 cm	
M73A IP camera module (body) for connecting up to three additional functional and optical sensor modules (to be ordered individually) • ONVIF-compliant MOBOTIX 7 system platform (Profile S, T) with H.264 (Triple Streaming), H.265, MxPEG+ and M- JPEG • Max, image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: up to 120 dB • Functional extensions (via optional MOBOTIX modules): Audio (Microphone & Speaker), MultiSense (PIR, temperature, brightness sensor, Microphone), IR Light (supports 15°, 45°, 95° lenses), 1x miniUSB • Operating conditions: IP66/IK07, -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, Po Class 4 (IEEE 802.3af/at) • Connections: 1x LSA terminal for weatherproof network connection via laying cable (Ethernet 1000BaseT), 3x MOBOTIX module connection (optical/functional), I/0 (1x input, 1x output), 1x line in, 1x line out, 1x miniUSB • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)	E.	18,0 cm 14,3 l	



Mx-M73A-RJ45 4047438034982 29,6 cm M73 Body with RJ45 Connector Box (white) 85258900 26,8 cm M73A IP camera module (body) for connecting up to three additional functional and 2.500 g 18,0 cm optical sensor modules (to be ordered individually) • ONVIF-compliant MOBOTIX 7 14,3 l system platform (Profile S, T) with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: up to 120 dB • Functional extensions (via optional MOBOTIX modules): Audio (Microphone & Speaker), MultiSense (PIR, temperature, brightness sensor, Microphone), IR Light (supports 15°, 45°, 95° lenses), 1x miniUSB • Operating conditions: IP66/IK07, -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 3x MOBOTIX module connection (optical/functional), I/0 (1x input, 1x output), 1x line in,1x line out, 1x miniUSB • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT -30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)

D71 Dome Camera

	Article No. / Name / Description	EAN / HS / weight	dimen.	
	Mx-D71A-4DN050	4047438039741	19,6 cm	
	D71 Complete Camera 4MP Ultra LowLight DN050 (Day	85258900	18,0 cm	
	D71 4MP camera with premium wide-angle lens and IR cut filter for day and night	1.180 g	14,8 cm	
The second secon	use, aperture: f/1.8, max. image angle (HxV): 95°x50°, max. resolution: 4MP Ultra LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic		5,2 l	
	Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IP66 • IK10		,	
	Operating temperature range: -40 to +65 °C - Built-in speaker and microphone • Line In & Out • Input & Output • USB-C • 8GB memory card included			
[]				
	Mx-D71A-4DN080	4047438039758	19,6 cm	
	D71 Complete Camera 4MP Ultra LowLight DN080 (Day	85258900	18,0 cm	
	D71 4MP camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 60°x33°, max. resolution: 4MP Ultra	1.180 g	14,8 cm	
	LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic		5,2 l	
	Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IP66 • IK10 • Operating temperature range: -40 to +65 °C - Built-in speaker and microphone • Line			
	In & Out • Input & Output • USB-C • 8GB memory card included			
	Mx-D71A-4DN100	4047438039765	19,6 cm	
	D71 Complete Camera 4MP Ultra LowLight DN100 (Day	85258900	18,0 cm	
	D71 4MP camera with premium wide-angle lens and IR cut filter for day and night	1.180 9	14,8 cm	
rand the second	use, aperture: f/1.8, max. image angle (HxV): 45°x25°, max. resolution: 4MP Ultra LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic		5,2 l	
	Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IP66 • IK10		- ,	
	Operating temperature range: -40 to +65 °C - Built-in speaker and microphone • Line In & Out • Input & Output • USB-C • 8GB memory card included			
	Mx-D71A-4DN150	4047438039772	19,6 cm	
0	D71 Complete Camera 4MP Ultra LowLight DN150 (Day	85258900	18,0 cm	
topont.	D71 4MP camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 30°x17°, max. resolution: 4MP Ultra	1.180 9	14,8 cm	
	LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IP66 • IK10		5,2 l	
	Operating temperature range: -40 to +65 °C - Built-in speaker and microphone • Line			
	In & Out • Input & Output • USB-C • 8GB memory card included			
	Mx-D71A-4DN280	4047438039789	19,6 cm	
	D71 Complete Camera 4MP Ultra LowLight DN280 (Day	85258900	18,0 cm	
··· · · · ·	D71 4MP camera with premium wide-angle lens and IR cut filter for day and night	1.180 g	14,8 cm	
	use, aperture: f/1.8, max. image angle (HxV): 15°x8,5°, max. resolution: 4MP Ultra LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic		5,2 l	
	Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IP66 • IK10 Operating temperature range: -40 to +65 °C - Built-in speaker and microphone • Line			
	In & Out • Input & Output • USB-C • 8GB memory card included			

мовотіх



Mx-D71A-8DN050	4047438039697	19,6 cm
D71 Complete Camera 4K DN050 (Day(Night), 95°x50°	85258900	18,0 cm
D71 4K camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 95°x50°, max. resolution: 4K UHD (3840x2160) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IP66 • IK10 • Operating temperature range: -40 to +65 °C - Built-in speaker and microphone • Line In & Out • Input & Output • USB-C • 8GB memory card included	1.180 9	14,8 cm 5,2 l



Mx-D71A-8DN080	4047438039703	19,6 cm
D71 Complete Camera 4K DN080 (Day(Night), 60°x33°	85258900	18,0 cm
D71 4K camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 60°x33°, max. resolution: 4K UHD (3840x2160) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IP66 • IK10 • Operating temperature range: -40 to +65 °C - Built-in speaker and microphone • Line In & Out • Input & Output • LISB-C • 86B memory card included	1.180 9	14,8 cm 5,2 l



/x-D71A-8DN100	4047438039710	19,6 cm
071 Complete Camera 4K DN100 (Day(Night), 45°x25°	85258900	18,0 cm
71 4K camera with premium wide-angle lens and IR cut filter for day and night use, perture: f/1.8, max. image angle (HxV): 45°x25°, max. resolution: 4K UHD 8840x2160) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - ay and night sensors • 3-axis mechanical pan/tilt head • IP66 • IK10 • Operating emperature range: -40 to +65 °C - Built-in speaker and microphone • Line In & Out • put & Output • USB-C • 8GB memory card included	1.180 9	14,8 cm 5,2 l

19,6 cm

18,0 cm

14,8 cm 5,2 l

85258900

1.180 9



Mx-D71A-8DN150 4047438039727 D71 Complete Camera 4K DN150 (Day(Night), 30°x17° D71 4K camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 30°x17°, max. resolution: 4K UHD (3840x2160) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB -Day and night sensors • 3-axis mechanical pan/tilt head • IP66 • IK10 • Operating temperature range: -40 to +65 $^{\circ}\mathrm{C}$ - Built-in speaker and microphone \bullet Line In & Out \bullet

Input & Output • USB-C • 8GB memory card included



Mx-D71A-8DN280	4047438039734	19,6 cm
D71 Complete Camera 4K DN280 (Day(Night), 15°x8,5°	85258900	18,0 cm
D71 4K camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 15°x8,5°, max. resolution: 4K UHD (3840x2160) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IP66 • IK10 • Operating temperature range: -40 to +65 °C - Built-in speaker and microphone • Line In & Out • Input & Output • USB-C • 8GB memory card included	1.180 9	14,8 cm 5,2 l

M16B AllroundDual Camera "Mx6B"

3

Second Mx6 generation – with MxBus functionality and enhanced performance.

	Article No. / Name / Description	EAN / HS / weight	dimen.	
Mx6B	Mx-M16B	4047438030915	29,6 cm	
MORANN	M16B Body, For M16 Sensor Modules (Day/Night)	85258900	19,6 cm	
	M16 camera module for connecting one or two M16/M15 sensor modules (to be	1.764 9	18,0 cm	
	ordered individually) • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • Image sensor options (via sensor module): 5 or 6 megapixels, color (day) and/or B/W (night) • Lens options (via sensor module): horizontal image angle from 180° to 8° • Max. image size (per image sensor): 6MP (3072 x 2048 pixels) • Operating conditions: IP66/IK07, -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB microSD • System components: speaker and microphone (inside housing), PIR sensor, temperature sensor, MxActivitySensor, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24- SecureFlex and pole mount MX-MH-SecureFlex-ESWS), ethernet patch cable 0.5 m/1.65 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus, USB; IO and RS232 via additional MX Interface Box • Incl. 1 Blind Module (MX-SM-Blind-PW)		10,4 l	

Q71A Hemispheric Camera

	Article No. / Name / Description	EAN / HS / weight	dimen.
	Mx-Q71A-12DN016	4047438039796	19,6 cm
	Q71 Complete Camera 12MP, DN016 (Day/Night), 360°	85258900	18,0 cm
Den .	Q71 camera with Hemispheric lens and IR cut filter for day and night use •f/1.8 • 12MP image sensor • 4K effective resolution: 2880x2880 (hemispheric original image) • Max. Frame rate (4K): 20 fps@MxPEG, 30 fps@H.264/H.265 • Integrated IR and white light LED illuminator • WDR: Wide Dynamic Range 120 dB • Combined day/night sensor with IR cut filter • IP66 • IK10 except on the lens • Operating temperature range: -40 to +65 °C • Built-in speaker and microphone - Line In & Out - Input & Output • USB-C • 8GB memory card included		14,8 cm 5,2 l

D16B DualDome Camera "Mx6B"

Second Mx6 generation – with MxBus functionality and enhanced performance.

	Article No. / Name / Description	EAN / HS / weight	dimen.
Mx6B	Mx-D16B	4047438030588	39,5 cm
	D16B Body, For D16B/D15 Sensor Modules (Day/Night)	85258900	29,6 cm
	IP camera module for connecting one or two D16/D15 sensor modules or a D16/D15 lens bridge FIX/PAN (to be ordered individually) • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • Image sensor options (via sensor module/bridge): 6 megapixels, color (day) and/or B/W (night) • Lens options (via lens unit): horizontal image angle from 103° to 31° • Max. image size (per image sensor): 6MP (3072 x 2048 pixels) • Operating conditions: IP54 without accessories, IP65/IK10 with Outdoor Wall Mount or IP66/IK10+ with Vandalism Set, each -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB MicroSD • Camera components: speaker, microphone, PIR sensor, temperature sensor, MxActivitySensor, shock detector • Ethernet patch cable 0.5 m/1.65 ft • Incl. 1x standard lens cover • Interfaces: Ethernet 10/100 (RJ45), MxBus, USB; IO and RS232 via additional MX Interface Box	1.211 3	9,0 cm 10,5 l

S74A

Article No. / Name / Description

EAN / HS / weight

4047438035552

85258900

1.400 g

dimen.

29.6 cm

19,6 cm

9,0 cm

5,2 l

29,6 cm



S74 Body for 4 Sensor- and Functional Modules
S74A IP camera module (body) for connecting up to four additional functional and optical sensor modules (to be ordered individually) • ONVIF-S/T-compliant MOBOTIX 7 system platform with H.264/H.265 (Triple Streaming), MxPEG+ and M-JPEG + Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: up to 120 dB • Functional extensions (via optional MOBOTIX modules): MultiSense (PIR, temperature, brightness sensor, Microphone), IR Light (supports 15°, 45°, 95° lenses), USB-C • Operating conditions: IP66/IK10 (housing). 40 to 65°C (-40 to 149°F) • Internal DVR: 8 GB microSD (for MxPEG + recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 or 1x LSA board for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 4x MOBOTIX module connection (2x optical/2x functional), USB-C, further connections via interface board • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white
Warranty: 5 years (optionally extendable up to 8 years)



Mx-S74A-LSA S74 Body for 4 Sensor- and Functional Modules with LSA

S74A IP camera module (body) for connecting up to four additional functional and optical sensor modules (to be ordered individually) • ONVIF-S/T-compliant MOBOTIX 7 system platform with H.264/H.265 (Triple Streaming), MxPEG+ and M-JPEG • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: up to 120 dB • Functional extensions (via optional MOBOTIX modules): MultiSense (PIR, temperature, brightness sensor, Microphone), IR Light (supports 15°, 45°, 95° lenses), USB-C • Operating conditions: IP66/IK10 (housing), -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) Connections: 1x LSA board for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 4x MOBOTIX module connection (2x optical/2x functional), USB-C, further connections via interface board • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)

85258900	19,6 cm
1.525 9	9,0 cm
	5,2 l

4047438047814



S74 Body for 4 Sensor- and Functional Modules with RJ45

S74A IP camera module (body) for connecting up to four additional functional and optical sensor modules (to be ordered individually) • ONVIF-S/T-compliant MOBOTIX 7 system platform with H.264/H.265 (Triple Streaming), MxPEG+ and M-JPEG • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: up to 120 dB • Functional extensions (via optional MOBOTIX modules): MultiSense (PIR, temperature, brightness sensor, Microphone), IR Light (supports 15°, 45°, 95° lenses), USB-C \cdot Operating conditions: IP66/IK10 (housing), -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) Connections: 1x RJ45 board for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 4x MOBOTIX module connection (2x optical/2x functional), USB-C, further connections via interface board • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)

4047438047807	29,6 cm
85258900	19,6 cm
1.520 9	9,0 cm
	5,2 l



S74 Set with 2x 12DN016 sensor modules

Mx-S74A-SET

S74A IP camera (set) incl. built-in AudioIO and RJ45 plug-in board + 2x 3m sensor cable (Mx-A-S7A-CBL03) + 2x 12DN016 sensor module (12MP, Day/Night, Hemispheric, white, Mx-O-M7SA-12DN016) • for connecting up to two additional functional and optical sensor modules (to be ordered individually) • ONVIF-S/Tcompliant MOBOTIX 7 system platform with H.264/H.265 (Triple Streaming), MxPEG+ and M-JPEG • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: up to 120 dB • Functional extensions (via optional MOBOTIX modules): MultiSense (PIR, temperature, brightness sensor, Microphone), IR Light (supports 15°, 45°, 95° lenses), USB-C • Operating conditions: IP66/IK10 (housing), -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802,3af/at) • Connections: 1x RJ45 board (with 12/24 VDC Power Supply) for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 4x MOBOTIX module connection (2x optical/2x functional), USB-C, further connections via interface board - Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years)

4047438047999	29,6 cm
85258900	19,6 cm
1.980 g	18,0 cm
	10,4 l



Mx-S74A-VDC

S74 Body for 4 Sensor- and Functional Modules with RJ45

S74A IP camera module (body) for connecting up to four additional functional and optical sensor modules (to be ordered individually) • ONVIF-S/T-compliant MOBOTIX 7 system platform with H.264/H.265 (Triple Streaming), MxPEG+ and M-JPEG • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: up to 120 dB • Functional extensions (via optional MOBOTIX modules): MultiSense (PIR, temperature, brightness sensor, Microphone), IR Light (supports 15°, 45°, 95° lenses), USB-C • Operating conditions: IP66/IK10 (housing), -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 board (with 12/24 VDC Power Supply) for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 4x MOBOTIX module connection (2x optical/2x functional), USB-C, further connections via interface board • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 vears)

4047438047821	29,6 cm
85258900	19,6 cm
1.510 9	9,0 cm
	5,2 l

S16B DualFlex Camera "Mx6B"

Second Mx6 generation – with MxBus functionality and enhanced performance.

	Article No. / Name / Description	EAN / HS / weight	dimen.	
Mx6B	Mx-S16B	4047438031400	19,6 cm	
	S16B Body, For S16B/S15 Sensor Modules	85258900	14,8 cm	
	S16 camera module (body) for connecting one or two S16/S15 sensor modules (to be	660 g	9,0 cm	
((interest	ordered individually) • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • Image sensor options (via sensor module): 6 megapixels, color (day) and/or B/W (night) and/or thermal • Lens options (via optical sensor module): horizontal image angle from 180° to 8° • IP66/IK06, -40 to 60°C (-40 to 140°F) • Internal DNR: 4 GB microSD • System components: temperature sensor, MxActivitySensor, shock detector • Ethernet patch cable 0.5 m/1.65 ft • Interfaces: 2x connection for MOBOTIX sensor module (Cam1/Cam2), Ethernet 10/100 (RJ45 and LSA), MxBus, USB, Audio (I/O); RS232 via MX Interface Box		2,6 l	

M26B Allround Camera "Mx6B"

Second Mx6 generation – with MxBus functionality and enhanced performance.

	Article No. / Name / Description	EAN / HS / weight	dimen.	
Mx6B	Mx-M26B-6D	4047438031042	29,6 cm	
- 101000	M26B Body 6MP (Day)	85258900	19,6 cm	
m	IP camera module (body) with 6 Megapixel Moonlight Sensor, color (day) • ONVIF-	1.337 g	18,0 cm	
	compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG+ Lens to be ordered individually (B036 to B500) • For mounting the Super Tele Lens MX-B500, the Extended Replacement Lens Cover is needed (MOBOTIX accessory: MX- M24M-OPT-LCGL) • Max. image size: 6MP (3072 x 2048) • IP66/IK10, -40 to 50°C (-40 to 122°F) • Internal DVR: 4 GB microSD • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, MxAnalytics, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24- SecureFlex and pole mount MX-MH-SecureFlex-ESWS) • Ethernet patch cable 0.5 m/1.6 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus, USB; I/O and RS232 via MX-232- IO-Box (MX-OPT-RS1-EXT)		10,4 l	



Mx-M26B-6N	4047438031134	29,6 cm
M26B Body 6MP (Night)	85258900	19,6 cm
IP camera module (body) with 6 Megapixel Moonlight Sensor, B/W (night) • ONVIF- compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • Lens to be ordered individually (B036 to B500) • For mounting the Super Tele Lens B500, the Extended Replacement Lens Cover is needed (MOBOTIX accessory: MX- M24M-OPT-LCGL) • Max. image size: 6MP (3072 x 2048) • IP66/IK10, ~40 to 50°C (~40 to 122°F) • Internal DVR: 4 GB microSD • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, MxAnalytics, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24- SecureFlex and pole mount MX-MH-SecureFlex-ESWS) • Ethernet patch cable 0.5 m/1.6 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus, USB; I/O and RS232 via MX-232- IO-Box (MX-OPT-RS1-EXT)	1.344 9	

D26B Allround Camera "Mx6B"

Second Mx6 generation – with MxBus functionality and enhanced performance.

	Article No. / Name / Description	EAN / HS / weight	dimen.
Mx6B	Mx-D26B-6D	4047438030670	19,6 cm
\frown	D26B Body 6MP (Day)	85258900	18,0 cm
	D26 camera module (body) with 6 Megapixel Moonlight Sensor, color (day) • ONVIF- compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • Lens to be ordered individually (B036 to B237) • Max. image size: 6MP (3072 x 2048) • IP66/IK10, -40 to 50°C (-40 to 122°F) • Internal DVR: 4 GB microSD • Temperature sensor, MxActivitySensor, MxAnalytics, shock detector • Ethernet cable 0.5 m/1.6 ft • Lens cover with sealing ring (polycarbonate, 1.5 mm) • Interfaces: Ethernet 10/100 (RJ45), MxBus, USB; I/O and RS232 via MX-232-IO-Box (MX-OPT-RS1-EXT)		14,8 cm 5,2 l



Mx-D26B-6N 4047438030748 19,6 cm D26B Body 6MP (Night) 85258900 18,0 cm D26 camera module (body) with 6 Megapixel Moonlight Sensor, B/W (night) • 0NVIFcompliant Mx6 system platform (2nd generation) with H.264, MxPEG + and M-JPEG • Lens to be ordered individually (B036 to B237) • Max. image size: 6MP (3072 x 2048) • IP66/IK10, -40 to 50°C (-40 to 122°F) • Internal DVR: 4 GB microSD • Temperature sensor, MxActivitySensor, MxAnalytics, shock detector • Ethernet patch cable 0.5 m/1.6 ft • Lens cover with sealing ring (polycarbonate, 1.5 mm) • Interfaces: Ethernet 10/100 (RJ45), MxBus, USB; I/O and R5232 via MX-232-IO-Box (MX-OPT-RS1-EXT) 5,2

All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX • 24.01.2025 • MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025

Q26B Hemispheric Camera "Mx6B"

Second Mx6 generation – with MxBus functionality and enhanced performance.

	Article No. / Name / Description	EAN / HS / weight	dimen.
Mx6B	Mx-Q26B-6D016	4047438031387	29,6 cm
	Q26B Complete Cam 6MP, B016 (Day)	85258900	19,6 cm
	Hemispheric IP camera with 6 Megapixel Moonlight Sensor, color (day) • ONVIF- compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • HD premium fisheye lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • Max. image size: 6MP (3072 x 2048) • IP66/IK06, -40 to 50°C (-40 to 122°F) • Internal DVR: 4 6B microSD • HD Audio with integrated microphone and speaker • Temperature sensor, MxActivitySensor, MxAnalytics (incl. behavioral detection), shock detector • Etherner patch cable 0.5 m/1.6 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus, USB; I/O and RS232 via MX-232-IO-Box (MX-OPT-RS1-EXT)		9,0 cm 5,2 l

мовотіх

IoT Video Systems Indoor

Beyond Human Vision



All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX • 24.01.2025 • MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025

c26B Indoor Camera "Mx6B"

Second Mx6 generation - with MxBus functionality and enhanced performance.

Article No. / Name / Description	EAN / HS / weight	dimen.
Mx-c26B-6D016	4047438030496	19,6 cm
c26B Complete Cam 6MP, B016, Day	85258900	15,0 cm
Hemispheric IP indoor camera for ceiling mounting • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • 6 Megapixel Moonlight Sensor, color (day) • HD premium fisheye lens B016 (focal length 1.6 mm, f/2.0, 180° 180°) • Max. image size: 6MP (3072 x 2048) • IP20, 0 to 40°C (32 to 104°F) • 4-GB microSD • Temperature sensor, illumination sensor, movement sensor, MxActivitySensor, MxAnalytics (incl. behavioral detection), shock detector • 0.5 m/1. ft Ethernet patch cable • Interfaces: Ethernet 10/100 (RJ45), MxBus (via Mx-A-IOA-IC)	.6	9,0 cm 2,6 l



Mx-c26B-6N016

Mx-c26B-6N016	4047438030526	19,6 cm	
c26B Complete Cam 6MP, B016, Night	85258900	15,0 cm	
Hemispheric IP indoor camera for ceiling mounting • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • 6 Megapixel Moonlight Sensor, B/W (night) • HD premium fisheye lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • Max. image size: 6MP (3072 x 2048) • IP20, 0 to 40°C (32 to 104°F) • 4-GB microSD • Temperature sensor, illumination sensor, movement sensor, MxActivitySensor, MxAnalytics (incl. behavioral detection), shock detector • 0.5 m/1.6 ft Ethernet patch cable • Interfaces: Ethernet 10/100 (RJ45), MxBus (via Mx-A-IOA-IC), USB, slot for MxIOBoard-IC (Mx-A-IOA-IC) • Color: white	433 9	9,0 cm 2,6 l	



бB	Mx-c26B-AU-6D016	4047438030540	19,6 cm
	c26B Complete Cam 6MP, B016, Day, Audio Package	85258900	15,0 cm
)	Hemispheric IP indoor camera for ceiling mounting • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • 6 Megapixel Moonlight Sensor, color (day) • HD premium fisheye lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • Max. image size: 6MP (3072 x 2048) • IP20, 0 to 40°C (32 to 104°F) • 4-GB microSD • HD Audio with integrated microphone and speaker • Temperature sensor, illumination sensor, movement sensor, MxActivitySensor, MxAnalytics (incl. behavioral detection), shock detector • 0.5 m/1.6 ft Ethernet patch cable • Interfaces: Ethernet 10/100 (RJ45), MxBus (via Mx-A-IOA-IC), USB, slot for MxIOBoard-IC (Mx-A- IOA-IC) • Color: white	442 9	9,0 cm 2,6 l



Mx-c26B-AU-6N016 4047438030564 19,6 cm c26B Complete Cam 6MP, B016, Night, Audio Package 85258900 15,0 cm Hemispheric IP indoor camera for ceiling mounting • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • 6 Megapixel Moonlight 452 g 9,0 cm 2,6 l Sensor, B/W (night) • HD premium fisheye lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • Max. image size: 6MP (3072 x 2048) • IP20, 0 to 40°C (32 to 104°F) • 4-GB $\mathsf{microSD} \bullet \mathsf{HD}$ Audio with integrated microphone and speaker \bullet Temperature sensor, $illumination\ sensor,\ movement\ sensor,\ MxActivitySensor,\ MxAnalytics\ (incl.$ behavioral detection), shock detector • 0.5 m/1.6 ft Ethernet patch cable • Interfaces: Ethernet 10/100 (RJ45), MxBus (via Mx-A-IOA-IC), USB, slot for MxIOBoard-IC (Mx-A-IOA-IC) • Color: white

c71A Indoor Camera

Article No. / Name / Description	EAN / HS / weight	dimen.
Mx-c71A-8DN016	4047438041027	19,6 cm
c71 Indoor Complete Camera 4k, DN016 (Day/Night)	85258900	18,0 cm
 c71 Indoor camera with Hemispheric lens and IR cut filter for day and night use • f/1.8 • 4k image sensor • 4MP effective resolution: 2160x2160 (hemispheric original	1.040 g	14,8 cm
image) • Max. Frame rate (4MP): 30 fps@MxPEG, 30 fps@H.264/H.265 · Integrated IR LED illuminator • WDR: Wide Dynamic Range 120 dB • Combined day/night sensor with IR cut filter • Operating temperature range: -10 to +50 °C • Built-in speaker and microphone • USB-C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty		5,2 l
_		
Mx-c71A-NurseAssist	4047438048293	19.6 cm



-			
	Mx-c71A-NurseAssist	4047438048293	19,6 cm
	MOBOTIX c71 NurseAssist powered by Kepler Vision	85258900	18,0 cm
	MOBOTIX c71 NurseAssist powered by Kepler Vision Technologies including the following features: • monitoring of the well-being of patients in private rooms, corridors and common areas of Healthcare facilities • minimization of reaction times due to decentralized state-of-the-art fall detection • prevention of accidents through: person down, person in bed and person out of bed event • simple and decent installation • GDPR compliant operation through event-controlled obscuring of live and recorded images	1.040 9	14,8 cm 5,2 l

p71A Indoor Camera



Article No. / Name / Description	EAN / HS / weight	dimen.
 Mx-p71A-4DN040	4047438041164	19,6 cm
p71 Indoor Complete Camera 4MP Ultra LowLight DN040	85258900	18,0 cm
p71 4MP Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 120°x60°, max. resolution: 4MP Ultra LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • Operating temperature range: -10 to +50°C • Built-in speaker and microphone • USB- C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	1.175 9	14,8 cm 5,2 l



Mx-p71A-4DN050	4047438041171	19,6 cm	
p71 Indoor Complete Camera 4MP Ultra LowLight DN050	85258900	18,0 cm	
p71 4MP Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 95°x50°, max. resolution: 4MP Ultra LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • Operating temperature range: -10 to +50°c • Built-in speaker and microphone • USB- C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	1.175 9	14,8 cm 5,2 l	



Mx-p71A-4DN080	4047438041188	19,6 cm
p71 Indoor Complete Camera 4MP Ultra LowLight DN080 p71 4MP Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 60°x33°, max. resolution: 4MP Ultra LowLight Sensor (2688x1512) • Integrated IR LED Illuminators • WDR: Wide	85258900 1.175 9	18,0 cm 14,8 cm 5,2 l
Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • Operating temperature range: -10 to +50°C • Built-in speaker and microphone • USB- C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty		



Mx-p71A-4DN100	4047438041195	19,6 cm
p71 Indoor Complete Camera 4MP Ultra LowLight DN100	85258900	18,0 cm
p71 4MP Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 45°x25°, max. resolution: 4MP Ultra LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • Operating temperature range: -10 to +50 °C • Built-in speaker and microphone • USB- C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	1.175 9	14,8 cm 5,2 l



Mx-p71A-4DN150	4047438041201	19,6 cm
p71 Indoor Complete Camera 4MP Ultra LowLight DN150	85258900	18,0 cm
p71 4MP Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 30°x17°, max. resolution: 4MP Ultra LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • Operating temperature range: -10 to +50°C • Built-in speaker and microphone • USB- C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	1.175 9	14,8 cm 5,2 l

ΜΟΒΟΤΙΧ

	• •	•		nonor	
	G				
	1	0	•	ſ	
			/		

	HOBOTIX.			
and the second	Mx-p71A-4DN280 p71 Indoor Complete Camera 4MP Ultra LowLight DN280 p71 4MP Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 15°x8,5°, max. resolution: 4MP Ultra LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • Operating temperature range: -10 to +50°C • Built-in speaker and microphone • USB- C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	4047438041218 85258900 1.175 9	19,6 cm 18,0 cm 14,8 cm 5,2 l	
	Mx-p71A-8DN040	4047438041041	19,6 cm	
	p71 Indoor Complete Camera 4K DN040 (Day/Night), 120°	85258900	18,0 cm	

815 9 14,8 cm

5,2 l

19,6 cm

18,0 cm

14,8 cm 5,2 l

19,6 cm

18,0 cm

14,8 cm 5,2 l

p71 4K Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 120°x60°, max. resolution: 4K UHD (3840x2160) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB -Day and night sensors • 3-axis mechanical pan/tilt head • Operating temperature range: -10 to +50 °C • Built-in speaker and microphone • USB-C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty

			roron	
			Dan	
	.0)./	T	

Mx-p71A-8DN050	4047438041058
p71 Indoor Complete Camera 4K DN050 (Day/Night), 95°	85258900
p71 4K Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 95°x50°, max. resolution: 4K UHD (3840x2160) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • Operating temperature range: -10 to +50 °C • Built-in speaker and microphone • USB-C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	1.175 9



Mx-p71A-8DN080	4047438041065
p71 Indoor Complete Camera 4K DN080 (Day(Night), 60°	85258900
p71 4K Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 60°x33°, max. resolution: 4K UHD (3840x2160) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • Operating temperature range: -10 to +50 °C • Built-in speaker and microphone • USB-C • 8GB memory card included • MTBF 80,000 hours • 5 vears warranty	1.175 9



Mx-p71A-8DN100	4047438041072	19,6 cm
p71 Indoor Complete Camera 4K DN100 (Day(Night), 45°	85258900	18,0 cm
p71 4K Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 45°x25°, max. resolution: 4K UHD (3840x2160) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • Operating temperature range: -10 to +50°C • Built-in speaker and microphone • USB-C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	1.175 9	14,8 cm 5,2 l



Mx-p71A-8DN150	4047438041089	19,6 cm
p71 Indoor Complete Camera 4K DN150 (Day(Night), 30°	85258900	18,0 cm
p71 4K Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 30°x17°, max. resolution: 4K UHD (3840x2160) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • Operating temperature range: -10 to +50 °C • Built-in speaker and microphone • USB-C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	1.175 9	14,8 cm 5,2 l

Mx-p71A-8DN280	4047438041096	19,6 cm
p71 Indoor Complete Camera 4K DN280 (Day(Night), 15°	85258900	18,0 cm
p71 4K Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 15°x8,5°, max. resolution: 4K UHD (3840x2160) • Integrated IR LED illuminators • VDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • Operating temperature range: -10 to +50°C • Built-in speaker and microphone • USB-C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	1.175 9	14,8 cm 5,2 l

v71A Indoor Camera



Article No. / Name / Description	EAN / HS / weight	dimen.
Mx-v71A-4DN050	4047438040921	19,6 cm
v71 Indoor Complete Camera 4MP Ultra LowLight DN050 -	85258900	18,0 cm
v71 4MP Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 95°x50°, max. resolution: 4MP Ultra LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IK10 with standard dome • Operating temperature range: -10 to +50 °C • Built-in speaker and microphone • USB-C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	1.050 g	14,8 cm 5,2 l



Mx-v71A-4DN080	4047438040938	19,6 cm	
v71 Indoor Complete Camera 4MP Ultra LowLight DN080 -	85258900	18,0 cm	
v71 4MP Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 60°x33°, max. resolution: 4MP Ultra LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IK10 with standard dome • Operating temperature range: -10 to +50 °C • Built-in speaker and microphone • USB-C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	1.050 9	14,8 cm 5,2 l	
J			



Mx-v71A-4DN100	4047438040945	19,6 cm
v71 Indoor Complete Camera 4MP Ultra LowLight DN100 -	85258900	18,0 cm
v71 4MP Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 45°x25°, max. resolution: 4MP Ultra LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IK10 with standard dome • Operating temperature range: -10 to +50 °C • Built-in speaker and microphone • USB-C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	1.050 9	14,8 cm 5,2 l



Mx-v71A-4DN150	4047438040952	19,6 cm	
v71 Indoor Complete Camera 4MP Ultra LowLight DN150 -	85258900	18,0 cm	
v71 4MP Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 30°x17°, max. resolution: 4MP Ultra LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IK10 with standard dome • Operating temperature range: -10 to +50 °C • Built-in speaker and microphone • USB-C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	1.050 9	14,8 cm 5,2 l	



Mx-v71A-4DN280	4047438040969	19,6 cm
v71 Indoor Complete Camera 4MP Ultra LowLight DN280 -	85258900	18,0 cm
v71 4MP Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 15°x8,5°, max. resolution: 4MP Ultra LowLight Sensor (2688x1512) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IK10 with standard dome • Operating temperature range: -10 to +50 °C • Built-in speaker and microphone • USB-C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	1.050 9	14,8 cm 5,2 l

мовотіх

4047438040822

4047438040839

4047438040846

4047438040853

4047438040860

85258900

1.050 9

85258900

1.050 9

85258900

1.050 9

19,6 cm

18,0 cm

14,8 cm 5,2 l

19,6 cm

18,0 cm

14,8 cm

5,2 l

19,6 cm 18,0 cm

14,8 cm

5,2 l

19,6 cm

18,0 cm

14,8 cm 5,2 l

19.6 cm

Mx-v71A-8DN050 v71 Indoor Complete Camera 4K DN050 - 95°x50° v71 4K Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 95°x50°, max. resolution: 4K UHD (3840x2160) - Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IK10 with standard dome • Operating temperature range: •10 to +50 °C • Built-in speaker and microphone • USB- C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty
Mx-v71A-8DN080 v71 Indoor Complete Camera 4K DN080 - 60°x33° (Day v71 4K Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 60°x33°, max. resolution: 4K UHD (3840x2160) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IK10 with standard dome • Operating temperature range: -10 to +50 °C • Built-in speaker and microphone • USB- C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty
Mx-v71A-8DN100 v71 Indoor Complete Camera 4K DN100 - 45°x25° (Day

v71 4K Indoor camera with premi night use, aperture: f/1.8, max. in (3840x2160) • Integrated IR LED ill Day and night sensors • 3-axis me Operating temperature range: -10 C • 8GB memory card included • M

amera 4K DN100 - 45°x25° (Day	85258900
ium wide-angle lens and IR cut filter for day and nage angle (HxV): 45°x25°, max. resolution: 4K UHD lluminators • WDR: Wide Dynamic Range 120 dB - echanical pan/tilt head • IK10 with standard dome • 0 to +50 °C • Built-in speaker and microphone • USB- MTBF 80,000 hours • 5 years warranty	1.050 g



v71 Indoor Complete Camera 4K DN150 - 30°x17° (Day

v71 4K Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 30°x17°, max. resolution: 4K UHD (3840x2160) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB -Day and night sensors • 3-axis mechanical pan/tilt head • IK10 with standard dome • Operating temperature range: -10 to +50 °C • Built-in speaker and microphone • USB-C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty



Mx-v71A-8DN280

			,
	v71 Indoor Complete Camera 4K DN280 - 15°x8,5° (Day	85258900	18,0 cm
	v71 4K Indoor camera with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 15°x8,5°, max. resolution: 4K UHD (3840x2160) • Integrated IR LED illuminators • WDR: Wide Dynamic Range 120 dB - Day and night sensors • 3-axis mechanical pan/tilt head • IK10 with standard dome • Operating temperature range: -10 to +50 °C • Built-in speaker and microphone • USB- C • 8GB memory card included • MTBF 80,000 hours • 5 years warranty	1.050 9	14,8 cm 5,2 l
I	C • OOD memory card included • MTDF ou,000 hours • 5 years walfally		

p26B Indoor Camera "Mx6B"

Second Mx6 generation - with MxBus functionality and enhanced performance.

	Article No. / Name / Description	EAN / HS / weight	dimen.
Mx6B	Mx-p26B-6D	4047438031226	19,6 cm
IIIXOD	p26B Body 6MP, Day	85258900	18,0 cm
	p26 camera module (body) with image sensor and lens mount • Lens to be ordered individually (B036 to B237, focal length 3.6 to 23.7 mm, f/1.8) • Manually adjustable lens tilt angle -5* to -45° • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • 6 Megapixel Moonlight Sensor, color (day) • Max. image size: 6MP (3072 x 2048) • IP20, 0 to 40°C (32 to 104°P) • Internal DVR: 4-GB MicroSD • Temperature sensor, illumination sensor, movement sensor, MxActivitySensor, MxAnalytics, shock detector • Ethernet pacth cable 0.5 m/1.6 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus (via Mx-A-IOA-IC), USB, slot for MxIOBoard-IC (Mx-A-IOA-IC) • Color: white		14,8 cm 5,2 l

4047438031295

4047438031325

582 g

19,6 cm

18,0 cm

14,8 cm

5,2 l

19,6 cm



Mx-p26B-6N

p26B Body 6MP, Night 85258900 p26 camera module (body) with image sensor and lens mount • Lens to be ordered individually (B036 to B237, focal length 3.6 to 23.7 mm, f/1.8) • Manually adjustable lens tilt angle -5° to -45° • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • 6 Megapixel Moonlight Sensor, B/W (night) • Max. image size: 6MP (3072 x 2048) • IP20, 0 to 40°C (32 to 104°F) • Internal DVR: 4-GB MicroSD • Temperature sensor, illumination sensor, movement sensor, MxActivitySensor, MxAnalytics, shock detector • Ethernet patch cable 0.5 m/1.6 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus (via Mx-A-IOA-IC), USB, slot for MxIOBoard-IC (Mx-A-IOA-IC) • Color: white



Mx-p26B-AU-6D

•		,	
p26B Body 6MP, Day, Audio Package	85258900	18,0 cm	
p26 camera module (body) with 6 Megapixel Moonlight Sensor, color (day) and lens mount • Lens to be ordered individually (B036 to B237, focal length 3.6 to 23.7 mm,	591 9	14,8 cm	
f/1.8) • Manually adjustable lens tilt angle -5° to -45° • ONVIF-compliant Mx6 system		5,2 l	
platform (2nd generation) with H.264, MxPEG+ and M-JPEG • 6 Megapixel Moonlight			
Sensor, color (day) • Max. image size: 6MP (3072 x 2048) • IP20, 0 to 40°C (32 to 104°F)			
4-GB microSD • HD-Audio with integrated microphone and speaker • Temperature			
sensor, illumination sensor, movement sensor, MxActivitySensor, MxAnalytics, shock detector • Ethernet patch cable 0.5 m/1.6 ft • Interfaces: Ethernet 10/100 (RJ45),			
MxBus (via Mx-A-IOA-IC), USB, slot for MxIOBoard-IC (Mx-A-IOA-IC) • Color: white			



Mx-p26B-AU-6N

4047438031356 19,6 cm p26B Body 6MP, Night, Audio Package 85258900 18,0 cm p26 camera module (body) with 6 Megapixel Moonlight Sensor, B/W (night) and lens 480 g 14,8 cm mount • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ 5,2 l and M-JPEG • Lens to be ordered individually (B036 to B237, focal length 3.6 to 23.7 mm, f/1.8) • Manually adjustable lens tilt angle -5° to -45° • Max. image size: 6MP (3072 x 2048) • IP20, 0 to 40°C (32 to 104°F) • 4-GB microSD • HD Audio with integrated microphone and speaker • Temperature sensor, illumination sensor, movement sensor, MxActivitySensor, MxAnalytics, shock detector • Ethernet patch cable 0.5 m/1.6 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus (via Mx-A-IOA-IC), USB, slot for MxIOBoard-IC (Mx-A-IOA-IC) • Color: white

v26B Indoor Dome Camera "Mx6B"

Second Mx6 generation – with MxBus functionality and enhanced performance.

	Article No. / Name / Description	EAN / HS / weight	dimen.	
Mx6B	Mx-v26B-6D	4047438031547	19,6 cm	
	v26B Body 6MP, Day, White	85258900	18,0 cm	
5	v26 camera module (body) with image sensor and lens mount • Lens to be ordered	726 9	14,8 cm	
	individually (B036 to B237, focal length 3.6 to 23.7 mm, f/1.8) • Manually adjustable lens tilt angle 0° to -90° • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • 6 Megapixel Moonlight Sensor, color (day) • Max. image size: 6MP (3072 x 2048) • IP20, 0 to 40°C (32 to 104°F) • Lens cover with sealing ring (polycarbonate, 1.5 mm) • Internal DVR: 4 GB microSD • Temperature sensor, illumination sensor, movement sensor, MxActivitySensor, MxAnalytics, shock detector • Ethernet patch cable 0.5 m/1.6 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus (via Mx-A-IOA-IC), USB, slot for MxIOBoard-IC (Mx-A-IOA-IC) • Housing color: white		5,2 l	
	My_1/26P_6N	4047438031578	19.6 cm	



Mx-v26B-6N	4047438031578	19,6 cm	
v26B Body 6MP, Night, White	85258900	18,0 cm	
v26 camera module (body) with image sensor and lens mount • Lens to be ordered individually (B036 to B237, focal length 3.6 to 23.7 mm, f/1.8) • Manually adjustable lens tilt angle 0° to -90° • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • 6 Megapixel Moonlight Sensor, B/W (night) • Max. image size: 6MP (3072 x 2048) • IP20, 0 to 40°C (32 to 104°F) • Lens cover with sealing ring (polycarbonate, 1.5 mm) • Internal DVR: 4 GB microSD • Temperature sensor, illumination sensor, movement sensor, MxActivitySensor, MxAnalytics, shock detector • Ethernet patch cable 0.5 m/1.6 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus (via Mx-A-IOA-IC), USB, slot for MxIOBoard-IC (Mx-A-IOA-IC) • Housing color: white	726 9	14,8 cm 5,2 l	

мовотіх

IoT Video Systems Thermal

BeyondHumanVision

All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX • 24.01.2025 • MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025

MOBOTIX



-29-

M16B Thermal Camera "Mx6B"

Second Mx6 generation - with MxBus functionality and enhanced performance.

	Article No. / Name / Description	EAN / HS / weight	dimen.
Мх6В	Mx-M16TB-R079-EN54-V2	4047438048330	29,6 cm
MAOD	M16B Thermographic Camera TR, 50 mK, R079 (45°) - EN54	90251900	26,8 cm
	EN54 V2 Bundle incl. EN54 compliant default configuration, MX-OPT-RS1-EXT RS232	2.110 5	18,0 cm
	module + MX-Overvoltage-Protection-Box-LSA + MX-OPT-NPA1-EXT PoE Outdoor Bo • IP thermographic camera TR with Germanium Lens: B079 equivalent, horizontal/vertical image angle 45°/35° • ONVIF-compliant Mx6 system platform (2nc generation) with H.264, MXPEG+ and M-JPEG • Thermal radiometry (TR): calibrated thermal sensor for temperature events from -40 to 550°C (-40 to 1022°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second, 336 x 252 pixels (can be scaled up to 6MP) • Optional optical 6MP sensor module (to be ordered individually) • IP66/IK07, -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB microSD • System components: speaker and microphone (inside housing), PIR sensor, temperature sensor, MxActivitySensor, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24- SecureFlex and pole mount MX-MH-SecureFlex-ESWS), ethernet patch cable 0.5 m/1.65 ft • Interfaces: Ethernet 10/100 (RJ45) • Incl. 1 Blind Module (MX-SM-Blind-PW	1	14,3 l



Mx-M16TB-R119-EN54-V2

M16B Thermographic Camera TR, 50 mK, R119 (25°) - EN54

EN54 Bundle incl. EN54 compliant default configuration, MX-OPT-RS1-EXT RS232 module + MX-Overvoltage-Protection-Box-LSA + MX-OPT-NPA1-EXT PoE Outdoor Box • IP thermographic camera TR with Germanium Lens: B119 equivalent, horizontal/vertical image angle 25°/19° · ONVIF-compliant MX6 system platform (2nd generation) with H.264, MXPEG+ and M-JPEG • Thermal radiometry (TR): calibrated thermal sensor for temperature events from -40 to 550°C (-40 to 1022°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second, 336 x 252 pixels (can be scaled up to 6MP) • Optional optical 6MP sensor module (to be ordered individually) • IP66/IK07, -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB microSD • System components: speaker and microphone (inside housing), PIR sensor, temperature sensor, MxActivitySensor, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24-SecureFlex and pole mount MX-MH-SecureFlex-ESWS), ethernet patch cable 0.5 m/1.65 ft • Interfaces: Ethernet 10/100 (RJ45) • Incl. 1 Blind Module (MX-SM-Blind-PW)

4047438048347	29,6 cm
90251900	26,8 cm
2.170 9	18,0 cm
	14,3 l

.....



Mx-M16TB-R237-EN54-V2

M16B Thermographic Camera TR, 50 mK, R237 (17°) - EN54

EN54 Bundle incl. EN54 compliant default configuration, MX-OPT-RS1-EXT RS232 module + MX-Overvoltage-Protection-Box-LSA + MX-OPT-NPA1-EXT PoE Outdoor Box • IP thermographic camera TR with Germanium Lens: B237 equivalent, horizontal/vertical image angle 17°/13° • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MXPEG+ and M-JPEG - Thermal radiometry (TR): calibrated thermal sensor for temperature events from -40 to 550°C (-40 to 1022°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second, 336 x 252 pixels (can be scaled up to 6MP) • Optional optical 6MP sensor module (to be ordered individually) • IP66/IK07, -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB microSD • System components: speaker and microphone (inside housing), PIR sensor, temperature sensor, MxActivitySensor, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24-SecureFlex and pole mount MX-MH-SecureFlex-ESWS), ethernet patch cable 0.5 m/1.65 ft • Interfaces: Ethernet 10/100 (RJ45) • Incl. 1 Blind Module (MX-SM-Blind-PW)

4047438048354	29,6 cm
90251900	26,8 cm
2.170 9	18,0 cm
	14,3 l



Mx-M16TB-R079

M16B Thermographic Camera TR, 50 mK, R079 (45°)

IP thermographic camera TR with Germanium Lens: B079 equivalent, horizontal/vertical image angle 45°,35° • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • Thermal radiometry (TR): calibrated thermal sensor for temperature events from -40 to 550°C (-40 to 1022°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second, 336 x 252 pixels (can be scaled up to 6MP) • Optional optical 6MP sensor module (to be ordered individually) • IP66/IK07, -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB microSD • System components: speaker and microphone (inside housing), PIR sensor, temperature sensor, MxActivitySensor, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24-SecureFlex and pole mount MX-MH-SecureFlex-ESWS), ethernet patch cable 0.5 m/1.65 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus, USB; IO and RS232 via additional MX Interface Box • Incl. 1 Blind Module (MX-SM-Blind-PW)

7438030984	29,6 cm
90251900	19,6 cm
2.480 g	18,0 cm
	10,4 l

404



Mx-M16TB-R090

M16B Thermographic Camera TR, 50 mK, R090 (35°)

IP thermographic camera TR with Germanium Lens: B090 equivalent, horizontal/vertical image angle 35°/27° • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • Thermal radiometry (TR): calibrated thermal sensor for temperature events from -40 to 550°C (-40 to 1022°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second, 336 x 252 pixels (can be scaled up to 6MP) • Optional optical 6MP sensor module (to be ordered individually) • IP66/IK07, -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB microSD • System components: speaker and microphone (inside housing), PIR sensor, temperature sensor, MxActivitySensor, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24-SecureFlex and pole mount MX-MH-SecureFlex-ESWS), ethernet patch cable 0.5 m/1.65 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus, USB; IO and RS232 via additional MX Interface Box • Incl. 1 Blind Module (MX-SM-Blind-PW)

4047438036795	29,6 cm
90251900	19,6 cm
2.480 g	18,0 cm
	10,4 l



Mx-M16TB-R119

M16B Thermographic Camera TR, 50 mK, R119 (25°)

IP thermographic camera TR with Germanium Lens: B119 equivalent, horizontal/vertical image angle 25°/19° • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • Thermal radiometry (TR): calibrated thermal sensor for temperature events from -40 to 550°C (-40 to 1022°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second, 336 x 252 pixels (can be scaled up to 6MP) • Optional optical 6MP sensor module (to be ordered individually) • IP66/IK07, -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB microSD • System components: speaker and microphone (inside housing), PIR sensor, temperature sensor, MxActivitySensor, shock detector • VarioFlex wall mount (can be used with additional celling mount MX-DH-M24-SecureFlex and pole mount MX-MH-SecureFlex-ESWS), ethernet patch cable 0.5 m/1.65 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus, USB; IO and RS232 via additional MX Interface Box • Incl. 1 Blind Module (MX-SM-Blind-PW)

047438030991	29,6 cm
90251900	19,6 cm
1.936 9	18,0 cm
	10.4 l

4

0	Mx6B
0	
	Ď

Mx-M16TB-R237

M16B Thermographic Camera TR, 50 mK, R237 (17°)

IP thermographic camera TR with Germanium Lens: B237 equivalent, horizontal/vertical image angle 17°/13° · ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • Thermal radiometry (TR): calibrated thermal sensor for temperature events from -40 to 550°C (-40 to 1022°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second, 336 x 252 pixels (can be scaled up to 6MP) • Optional optical 6MP sensor module (to be ordered individually) • IP66/IK07, -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB microSD • System components: speaker and microphone (inside housing), PIR sensor, temperature sensor, MxActivitySensor, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24-SecureFlex and pole mount MX-MH-SecureFlex-ESWS), ethernet patch cable 0.5 m/1.65 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus, USB; IO and RS232 via additional MX Interface Box • Incl. 1 Blind Module (MX-SM-Blind-PW)

4047438031004	29,6 cm
90251900	19,6 cm
1.942 g	18,0 cm
	10,4 l



Mx-M16TB-R079-VDS

M16B Thermographic Camera TR, 50 mK, R079 (45°) - VDS

VdS-Bundle • IP thermographic camera TR with Germanium Lens: B079 equivalent, horizontal/vertical image angle 45°/35° • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • Thermal radiometry (TR): calibrated thermal sensor, detects critical temperature thresholds in the measuring range between 50° and 200° C (122° to 392°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second, 336 x 252 pixels (can be scaled up to 6MP) • IP66/IK07, -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB microSD • System components: speaker and microphone (inside housing), PIR sensor, temperature sensor, MxActivitySensor, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24-SecureFlex and pole mount MX-MH-SecureFlex-ESWS), ethernet patch cable 0.5 m/1.65 ft • Interfaces: Ethernet 10/100 (R145), MxBus, USB; IO and RS232 via additional MX Interface Box • Incl. 1 Blind Module (MX-SM-Blind-PW) • Bundle content: Thermal camera, Mx-OPT-RS1-EXT, Mx-Overvoltage-Protection-Box-LSA, Mx-OPT-NPA1-EXT, Firmware Mx-FW-VDS-UP • Price on request

4047438041607	29,6 cm
90251900	26,8 cm
2.170 g	18,0 cm
	14,3 l



Mx6B

VdS

M16B Thermographic Camera TR, 50 mK, R119 (25°) - VDS

VdS Bundle • IP thermographic camera TR with Germanium Lens: B119 equivalent, horizontal/vertical image angle 25°/19° • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • Thermal radiometry (TR): calibrated thermal sensor, detects critical temperature thresholds in the measuring range between 50° and 200° C (122° to 392°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second, 336 x 252 pixels (can be scaled up to 6MP) • IP66/IK07, -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB microSD • System components: speaker and microphone (inside housing), PIR sensor, temperature sensor, MxActivitySensor, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24-SecureFlex and pole mount MX-MH-SecureFlex-ESWS), ethernet patch cable 0.5 m/1.65 ft • Interfaces: Ethernet 10/100 (R145), MxBus, USB; IO and RS232 via additional MX Interface Box • Incl. 1 Blind Module (MX-SM-Blind-PW) • Bundle content: Thermal camera, Mx-OPT-RS1-EXT, Mx-Overvoltage-Protection-Box-LSA, Mx-OPT-NPA1-EXT, Firmware Mx-FW-VDS-UP • Price on request

Mx-M16TB-R237-VDS

Mx-M16TB-R119-VDS

M16B Thermographic Camera TR, 50 mK, R237 (17°) - VDS

VdS Bundle • IP thermographic camera TR with Germanium Lens: B237 equivalent, horizontal/vertical image angle 17°/13° • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • Thermal radiometry (TR): calibrated thermal sensor, detects critical temperature thresholds in the measuring range between 50° and 200° C (122° to 392°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second, 336 x 252 pixels (can be scaled up to 6MP) • IP66/IK07, -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB microSD • System components: speaker and microphone (inside housing), PIR sensor, temperature sensor, MxActivitySensor, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24-SecureFlex and pole mount MX-MH-SecureFlex-ESWS), ethernet patch cable 0.5 m/1.65 ft • Interfaces: Ethernet 10/100 (R145), MxBus, USB; IO and RS232 via additional MX Interface Box • Incl. 1 Blind Module (MX-SM-Blind-PW) • Bundle content: Thermal camera, Mx-OPT-RS1-EXT, Mx-Overvoltage-Protection-Box-LSA, Mx-OPT-NPA1-EXT, Firmware Mx-FW-VDS-UP • Price on request

4047438041614	29,6 cm
90251900	26,8 cm
2.170 9	18,0 cm
	14,3 l

4047438041621	29,6 cm
90251900	26,8 cm
2.170 g	18,0 cm
	14,3 l



Mx-M16TB-T079

M16B Thermographic Camera 50 mK, T079 (45°)

IP thermographic camera with T079 thermal lens, horizontal/vertical image angle 45°/35°, optional connection of an additional optical 6MP sensor module (to be ordered individually) • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPE6+ and M-JPE6 • Highly sensitive thermal image sensor. NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second • Image size (thermal): 336 x 252 pixels (can be scaled up) • IP66/IK07, -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB microSD • System components: speaker and microphone (inside housing), PIR sensor, temperature sensor, MxActivitySensor, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24-SecureFlex and pole mount MX-MH-SecureFlex-ESWS), ethernet patch cable 0.5 m/1.65 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus, USB; IO and RS232 via additional MX Interface Box • Incl. 1 Blind Module (MX-SM-Blind-PW)

10,4 l

29,6 cm

19,6 cm

18,0 cm

4047438031011

90251900

2.460 g



Mx-M16TB-T119

M16B Thermographic Camera 50 mK, T119 (25°)

IP thermographic camera with T119 thermal lens, horizontal/vertical image angle 25°/19°, optional connection of an additional optical 6MP sensor module (to be ordered individually) • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • Highly sensitive thermal image sensor: NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second - Image size (thermal): 336 x 252 pixels (can be scaled up) • IP66/IK07, -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB microSD • System components: speaker and microphone (inside housing), PIR sensor, temperature sensor, MxActivitySensor, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24-SecureFlex and pole mount MX-MH-

additional ceiling mount MX-DH-M24-SecureFlex and pole mount MX-MH-SecureFlex-ESWS), ethernet patch cable 0.5 m/1.65 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus, USB; IO and RS232 via additional MX Interface Box • Incl. 1 Blind Module (MX-SM-Blind-PW)

4047438031028	29,6 cm
90251900	19,6 cm
2.460 g	18,0 cm
	10,4 l



Mx-M16TB-T237 M16B Thermographic Camera 50 mK, T237 (17°)

IP thermographic camera with T237 thermal lens, horizontal/vertical image angle 17°/13°, optional connection of an additional optical 6MP sensor module (to be ordered individually) • ONVIF-compliant Mx6 system platform (2nd generation) with H.264, MxPEG+ and M-JPEG • Highly sensitive thermal image sensor: NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second • Image size (thermal): 336 x 252 pixels (can be scaled up) • IP66/IK07, -40 to 60°C (-40 to 140°F) • Internal DVR: 4 GB MicroSD • System components: speaker and microphone (inside housing), PIR sensor, temperature sensor, MxActivitySensor, shock detector • VarioFlex wall mount (can be used with additional ceiling mount MX-DH-M24-SecureFlex and pole mount MX-MH-SecureFlex-ESWS), ethernet patch cable 0.5 m/1.65 ft • Interfaces: Ethernet 10/100 (RJ45), MxBus, USB; IO and RS232 via additional MX Interface Box • Incl. 1 Blind Module (MX-SM-Blind-PW)

4047438031035	29,6 cm
90251900	19,6 cm
1.946 9	18,0 cm
	10,4 l

Sensor Module Thermal for MOBOTIX 7

	Article No. / Name / Description	EAN / HS / weight	dimen.
	Mx-O-M73TB-336R100	4047438040198	19,6 cm
	Thermal module 336-R100 with front plate for M73 (B	90275000	18,0 cm
	CIF (336 x 256 Pixel) • with Thermal Radiometry • 45° x 35° • incl. M73 replacement	450 g	14,8 cm
T.	front plate		5,2 l



Mx-O-M73TB-336R150	4047438040204	19,6 cm
Thermal module 336-R150 with front plate for M73 (B	90275000	18,0 cm
CIF (336 x 256 Pixel) • with Thermal Radiometry • 25° x 19° • incl. M73 replacement	450 9	14,8 cm
front plate		5,2 l



Mx-O-M73TB-336R280	4047438040211	19,6 cm
Thermal module 336-R280 with front plate for M73 (B	90275000	18,0 cm
CIF (336 x 256 Pixel) • with Thermal Radiometry • 17° x 13° • incl. M73 replacement front plate	450 9	14,8 cm 5,2 l



Mx-O-M73TB-336T100	4047438040129	19,6 cm
Thermal module 336-T100 with front plate for M73 (B	90275000	18,0 cm
CIF (336 x 256 Pixel) • w/o Thermal Radiometry • 45° x 35° • incl. M73 replacement front plate	450 9	14,8 cm 5,2 l



Mx-O-M73TB-336T150	4047438040136	19,6 cm
Thermal module 336-T150 with front plate for M73 (B	90275000	18,0 cm
CIF (336 x 256 Pixel) • w/o Thermal Radiometry • 25° x 19° • incl. M73 replacement front plate	450 9	14,8 cm 5,2 l

• •	~	р	<u> </u>	T	v
IVI	υ	в	υ	11	X

Î	1			-	1
	4	•	.)		/
	V	1			
		0		/	

Mx-O-M73TB-336T280	4047438040143	19,6 cm	
Thermal module 336-T280 with front plate for M73 (B	90275000	18,0 cm	
CIF (336 x 256 Pixel) • w/o Thermal Radiometry • 17° x 13° • incl. M73 replacement front plate	450 9	14,8 cm 5.2 l	
		5,2 1	



Mx-O-M73TB-640R050	4047438040228	19,6 cm
Thermal module 640-R050 with front plate for M73 (B	90275000	18,0 cm
VGA (640 x 480 Pixel) \bullet with Thermal Radiometry \bullet 90° x 69° \bullet incl. M73 replacement front plate	450 9	14,8 cm 5,2 l



Mx-O-M73TB-640R080	4047438040235	19,6 cm
Thermal module 640-R080 with front plate for M73 (B	90275000	18,0 cm
VGA (640 x 480 Pixel) • with Thermal Radiometry • 69° x 56° • incl. M73 replacement front plate	450 9	14,8 cm 5,2 l



Mx-O-M73TB-640R100	4047438040242	19,6 cm
Thermal module 640-R100 with front plate for M73 (B	90275000	18,0 cm
VGA (640 x 480 Pixel) • with Thermal Radiometry • 45° x 37° • incl. M73 replacement	450 9	14,8 cm
front plate		5,2 l



Mx-O-M73TB-640R150	4047438040259	19,6 cm
Thermal module 640-R150 with front plate for M73 (B	90275000	18,0 cm
VGA (640 x 480 Pixel) • with Thermal Radiometry • 32° x 26° • incl. M73 replacement front plate	450 g	14,8 cm 5,2 l



Mx-O-M73TB-640T050	4047438040150	19,6 cm
Thermal module 640-T050 with front plate for M73 (B	90275000	18,0 cm
VGA (640 x 480 Pixel) • w/o Thermal Radiometry • 90° x 69° • incl. M73 replacement front plate	450 9	14,8 cm 5,2 l

М	\cap	R	\sim	т	v
IVI	υ	D	υ	11	I A

1	1			
	1)/
		1	I)	

Mx-O-M73TB-640T080	4047438040167	19,6 cm
Thermal module 640-T080 with front plate für M73 (B	90275000	18,0 cm
VGA (640 x 480 Pixel) • w/o Thermal Radiometry • 69° x 56° • incl. M73 replacement	450 9	14,8 cm
front plate		5,2 l



Mx-O-M73TB-640T100	4047438040174	19,6 cm
Thermal module 640-T100 with front plate for M73 (B	90275000	18,0 cm
VGA (640 x 480 Pixel) • w/o Thermal Radiometry • 45° x 37° • incl. M73 replacement front plate	450 9	14,8 cm 5,2 l



Mx-O-M73TB-640T150	4047438040181	19,6 cm
Thermal module 640-T150 with front plate for M73 (B	90275000	18,0 cm
VGA (640 x 480 Pixel) • w/o Thermal Radiometry • 32° x 26° • incl. M73 replacement front plate	450 9	14,8 cm 5,2 l



Mx-O-M7SA-320T040	4047438040648	9,8 cm
Thermal Module ECO 320 - T040 (105° x 75°)	90275000	7,5 cm
MOBOTIX 7 Thermal Module 320-T040 for M73/S74, CIF 320x240 • 9fps • 105° x 75°; 5,23mr • NETD: 65mK (typ); < 100mK (max) • IR Range 7,8 to 14µm • -40° to +65°C / 40° to 149°F • 5% to 95% non-condensing • IP66 • IK04	106 9	9,0 cm 0,7 l



Mx-O-M7SA-320T080	4047438040655	9,8 cm
Thermal Module ECO 320 - T080 (56° x 42°)	90275000	7,5 cm
MOBOTIX 7 Thermal Module 320-T080 for M73/S74, CIF 320x240 • 9fps • 56° x 42°; 3,00mr • NETD: 65mK (typ); < 100mK (max) • IR Range 7,8 to 14µm • -40° to +65°C / 40° to 149°F • 5% to 95% non-condensing • IP66 • IK04	106 9	9,0 cm 0,7 l



Mx-O-M7SA-320T150	4047438045193	9,8 cm
Thermal module ECO 320 - T150 (24° x 18°)	90275000	7,5 cm
MOBOTIX 7 Thermal Module 320-T150 for M73/S74, CIF 320x240 • 9fps • 24° x 18°; 1.32 mr • NETD: 65mK (typ); < 100mK (max) • IR Range 7,8 to 14µm • -40° to +65°C / 40° to 149°F • 5% to 95% non-condensing • IP66 • IK04	106 g	9,0 cm 0,7 l

N /	\sim		٦Т	٦Х
IVI	υ	D١	וע	1

Mx-O-M7SB-336RP100	4047438040051	19,6 cm
S7x PTMount Thermal 336-R100 (B model) 45° x 35°	90275000	18,0 cm
CIF (336 x 256 Pixel) • with Thermal Radiometry • 45° x 35°• Equipped with a 2 meter connection cable	890 9	14,8 cm 5,2 l



Mx-O-M7SB-336RP150	4047438040068	19,6 cm	
S7x PTMount Thermal 336-R150 (B model) 25° x 19°	90275000	18,0 cm	
CIF (336 x 256 Pixel) • with Thermal Radiometry • 25° x 19°• Equipped with a 2 meter connection cable	890 9	14,8 cm 5,2 l	



Mx-O-M7SB-336RP280	4047438040075	19,6 cm
S7x PTMount Thermal 336-R280 (B model) 17° x 13°	90275000	18,0 cm
CIF (336 x 256 Pixel) • with Thermal Radiometry • 17° x 13°• Equipped with a 2 meter connection cable	890 g	14,8 cm 5,2 l



Mx-O-M7SB-336RS100	4047438039918	14,8 cm
S7x Thermal Module 336-R100 (B model) 45° x 35°	90275000	9,8 cm
CIF (336 x 256 Pixel) • with Thermal Radiometry • 45° x 35°	380 g	9,0 cm
		1,3 l



Mx-O-M7SB-336RS150	4047438039925	14,8 cm
S7x Thermal module 336-R150 (B model) 25° x 19°	90275000	9,8 cm
CIF (336 x 256 Pixel) • with Thermal Radiometry • 25° x 19°	380 9	9,0 cm
		1,3 l



Mx-O-M7SB-336RS280	4047438039932	14,8 cm
S7x Thermal Module 336-R280 (B model) 17° x 13°	90275000	9,8 cm
CIF (336 x 256 Pixel) • with Thermal Radiometry • 17° x 13°	380 g	9,0 cm
		1,3 l

М	0	D	\sim	τı	IV
IVI	υ	D	υ	11	IA

|--|

Mx-O-M7SB-336TP100	4047438039987	19,6 cm
S7x PTMount Thermal 336-T100 (B model) 45° x 35°	90275000	18,0 cm
CIF (336 x 256 Pixel) • w/o Thermal Radiometry • 45° x 35° • Equipped with a 2 meter connection cable	890 9	14,8 cm 5,2 l



Mx-O-M7SB-336TP150	4047438039994	19,6 cm	
S7x PTMount Thermal 336-T150 (B model) 25° x 19°	90275000	18,0 cm	
CIF (336 x 256 Pixel) • w/o Thermal Radiometry • 25° x 19° • Equipped with a 2 meter connection cable	890 9	14,8 cm 5,2 l	



Mx-O-M7SB-336TP280	4047438040006	19,6 cm
S7x PTMount Thermal 336-T280 (B model) 17° x 13°	90275000	18,0 cm
CIF (336 x 256 Pixel) • w/o Thermal Radiometry • 17° x 13°• Equipped with a 2 meter connection cable	890 g	14,8 cm 5,2 l



Mx-O-M7SB-336TS100	4047438039840	14,8 cm
S7x Thermal Module 336-T100 (B model) 45° x 35°	90275000	9,8 cm
CIF (336 x 256 Pixel) • w/o Thermal Radiometry • 45° x 35°	380 9	9,0 cm
		1,3 l



Mx-O-M7SB-336TS150	4047438039857	14,8 cm
S7x Thermal module 336-T150 (B model) 25° x 19°	90275000	9,8 cm
CIF (336 x 256 Pixel) • w/o Thermal Radiometry • 25° x 19°	380 g	9,0 cm
		1,3 l



Mx-O-M7SB-336TS280	4047438039864	14,8 cm
S7x Thermal Module 336-T280 (B model) 17° x 13°	90275000	9,8 cm
CIF (336 x 256 Pixel) • w/o Thermal Radiometry • 17° x 13°	380 g	9,0 cm
		1,3 l

М	0	D	\sim	τı	IV
IVI	υ	D	υ	11	IA

|--|

Mx-O-M7SB-640RP050	4047438040082	19,6 cm
S7x PTMount Thermal 640-R050 (B model) 90° x 69°	90275000	18,0 cm
VGA (640 x 480 Pixel) • with Thermal Radiometry • 90° x 69° • Equipped with a 2 meter connection cable	890 9	14,8 cm
		5,2 l



 Mx-O-M7SB-640RP080	4047438040099	19.6 cm
S7x PTMount Thermal 640-R080 (B model) 69° x 56°	90275000	18,0 cm
VGA (640 x 480 Pixel) • with Thermal Radiometry • 69° x 56°• Equipped with a 2 meter connection cable	890 g	14,8 cm 5,2 l



Mx-O-M7SB-640RP100	4047438040105	19,6 cm
S7x PTMount Thermal 640-R100 (B model) 45° x 37°	90275000	18,0 cm
VGA (640 x 480 Pixel) • with Thermal Radiometry • 45° x 37°• Equipped with a 2 meter connection cable	890 ^g	14,8 cm 5,2 l



Mx-O-M7SB-640RP150	4047438040112	19,6 cm
S7x PTMount Thermal 640-R150 (B model) 30° x 26°	90275000	18,0 cm
VGA (640 x 480 Pixel) \bullet with Thermal Radiometry \bullet 30° x 26° \bullet Equipped with a 2 meter connection cable	890 g	14,8 cm 5,2 l



Mx-O-M7SB-640RS050	4047438039949	14,8 cm
S7x Thermal Module 640-R050 (B model) 90° x 69°	90275000	9,8 cm
VGA (640 x 480 Pixel) • with Thermal Radiometry • 90° x 69°	380 g	9,0 cm
		1,3 l



4047438039956	14,8 cm
90275000	9,8 cm
380 g	9,0 cm 1.3 l
	90275000

	Mx-O-M7SB-640RS100	4047438039963	14,8 cm
	S7x Thermal Module 640-R100 (B model) 45° x 37°	90275000	9,8 cm
	VGA (640 x 480 Pixel) ${\color{black}\bullet}$ with Thermal Radiometry ${\color{black}\bullet}$ 45° x 37°	380 g	9,0 cm
51.1			1,3 l



Mx-O-M7SB-640RS150	4047438039970	14,8 cm
S7x Thermal module 640-R150 (B model) 30° x 26°	90275000	9,8 cm
VGA (640 x 480 Pixel) \bullet with Thermal Radiometry \bullet 30° x 26°	380 g	9,0 cm 1.3 l
		1,3 1



Mx-O-M7SB-640TP050	4047438040013	19,6 cm
S7x PTMount Thermal 640-T050 (B model) 90° x 69°	90275000	18,0 cm
VGA (640 x 480 Pixel) • w/o Thermal Radiometry • 90° x 69°• Equipped with a 2 meter connection cable	890 9	14,8 cm 5,2 l



Mx-O-M7SB-640TP080	4047438040020	19,6 cm
S7x PTMount Thermal 640-T080 (B model) 69° x 56°	90275000	18,0 cm
VGA (640 x 480 Pixel) • w/o Thermal Radiometry • 69° x 56° • Equipped with a 2 meter	890 9	14,8 cm
connection cable		5,2 l



Mx-O-M7SB-640TP100	4047438040037	19,6 cm
S7x PTMount Thermal 640-T100 (B model) 45° x 37°	90275000	18,0 cm
VGA (640 x 480 Pixel) \bullet w/o Thermal Radiometry \bullet 45° x 37° \bullet Equipped with a 2 meter connection cable	890 9	14,8 cm 5,2 l



Mx-O-M7SB-640TP150	4047438040044	19,6 cm
S7x PTMount Thermal 640-T150 (B model) 30° x 26°	90275000	18,0 cm
VGA (640 x 480 Pixel) • w/o Thermal Radiometry • 30° x 26°• Equipped with a 2 meter connection cable	890 g	14,8 cm 5,2 l

M	٦R	ΟТ	'IX

Mx-O-M7SB-640TS050	4047438039871	14,8 cm
S7x Thermal Module 640-T050 (B model) 90° x 69°	90275000	9,8 cm
VGA (640 x 480 Pixel) • w/o Thermal Radiometry • 90° x 69°	380 9	9,0 cm 1,3 l



Mx-O-M7SB-640TS080	4047438039888	14,8 cm
S7x Thermal Module 640-T080 (B model) 69° x 56°	90275000	9,8 cm
VGA (640 x 480 Pixel) • w/o Thermal Radiometry • 69° x 56°	380 g	9,0 cm 1,3 l
· · ·		9,0 cm



Mx-O-M7SB-640TS100	4047438039895	14,8 cm
S7x Thermal module 640-T100 (B model) 45° x 37°	90275000	9,8 cm
VGA (640 x 480 Pixel) • w/o Thermal Radiometry • 45° x 37°	380 9	9,0 cm 1,3 l



Mx-O-M7SB-640TS150	4047438039901	14,8 cm
S7x Thermal module 640-T150 (B model) 30° x 26°	90275000	9,8 cm
VGA (640 x 480 Pixel) • w/o Thermal Radiometry • 30° x 26°	380 g	9,0 cm
		1,3 l

M73A Thermal Camera

	Article No. / Name / Description	EAN / HS / weight	dimen.
	Mx-M73TA-B336R100-EN54	4047438043410	29,6 cm
	M73A Thermographic Camera TR(B), CIF, R100 (45°) - EN54	90251900	26,8 cm
	EN54 bundle • M73A IP camera module (body) for connecting up to 1 additional	2.814 g	18,0 cm
•?	optical sensor module (to be ordered individually) • ONVIF-S-compliant MOBOTIX 7 system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • CIF Thermal sensor (336 x 256 Pixel), with Thermal Radiometry, 45° x 35° • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 55° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: 120 dB Tripple Shutter • Functional module: MultiSense (PIR, temperature, brightness sensor, Microphone), 1x minIUSB • Operating conditions: IP66/IK07, -40 to 65°C (-40 to 149°F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE		14,3 l
	Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 1x MOBOTIX module connection (optical), I/0 (1x input, 1x output), 1x line in,1x line out, 1x miniUSB •		
	Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20		
	different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years) • Bundle content: Mx-M73A-RJ45, Mx-O-M73TB-336R100, Mx-F-MSA, Mx-O-M7SA-Blind		



Mx-M73TA-B336R150-EN54 M73A Thermographic Camera TR(B), CIF, R150 (25°) - EN54

EN54 bundle • M73A IP camera module (body) for connecting up to 1 additional optical sensor module (to be ordered individually) • ONVIF-S-compliant MOBOTIX 7 system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG \bullet CIF Thermal sensor (336 x 256 Pixel), with Thermal Radiometry, 25° x 19° • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: 120 dB Tripple Shutter • Functional module: MultiSense (PIR, temperature, brightness sensor, Microphone), 1x miniUSB • Operating conditions: IP66/IK07, -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 1x MOBOTIX module connection (optical), I/0 (1x input, 1x output), 1x line in,1x line out, 1x miniUSB • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years) • Bundle content: Mx-M73A-RJ45, Mx-O-M73TB-336R150, Mx-F-MSA, Mx-O-M7SA-Blind

4047438043427	29,6 cm
90251900	26,8 cm
2.814 g	18,0 cm
	14,3 l



Mx-M73TA-B336R280-EN54

M73A Thermographic Camera TR(B), CIF, R280 (17°) - EN54

EN54 bundle • M73A IP camera module (body) for connecting up to 1 additional optical sensor module (to be ordered individually) • ONVIF-S-compliant MOBOTIX 7 system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • CIF Thermal sensor (336 x 256 Pixel), with Thermal Radiometry, 17° x 13° • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° \bullet Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: 120 dB Tripple Shutter • Functional module: MultiSense (PIR, temperature, brightness sensor, Microphone), 1x miniUSB • Operating conditions: IP66/IK07, -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 1x MOBOTIX module connection (optical), I/0 (1x input, 1x output), 1x line in,1x line out, 1x miniUSB ${\scriptstyle \bullet}$ Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years) • Bundle content: Mx-M73A-RJ45, Mx-O-M73TB-336R280, Mx-F-MSA, Mx-O-M7SA-Blind

4047438043434	29,6 cm
90251900	26,8 cm
2.814 g	18,0 cm
	14,3 l



M73A Thermographic Camera TR(B), VGA, R050 (90°) - EN54

EN54 bundle • M73A IP camera module (body) for connecting up to 1 additional optical sensor module (to be ordered individually) • ONVIF-S-compliant MOBOTIX 7 system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • VGA Thermal sensor (640 x 480 Pixel), with Thermal Radiometry, 90° x 69° • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: 120 dB Tripple Shutter • Functional module: MultiSense (PIR, temperature, brightness sensor, Microphone), 1x miniUSB • Operating conditions: IP66/IK07, -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) •• Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 1x MOBOTIX module connection (optical), I/0 (1x input, 1x output), 1x line in,1x line out, 1x miniUSB • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years) • Bundle content: Mx-M73A-RJ45, Mx-O-M73TB-640R050, Mx-F-MSA, Mx-O-M7SA-Blind

4047438043441	29,6 cm
90251900	26,8 cm
2.814 g	18,0 cm
	14,3 l

Mx-M73TA-B640R080-EN54

Mx-M73TA-B640R050-EN54

M73A Thermographic Camera TR(B), VGA, R080 (69°) - EN54

EN54 bundle • M73A IP camera module (body) for connecting up to 1 additional optical sensor module (to be ordered individually) • ONVIF-S-compliant MOBOTIX 7 system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • VGA Thermal sensor (640 x 480 Pixel), with Thermal Radiometry, 69° x 56° • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: 120 dB Tripple Shutter • Functional module: MultiSense (PIR, temperature, brightness sensor, Microphone), 1x miniUSB •• Operating conditions: IP66/IK07, -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 1x MOBOTIX module connection (optical), I/O (1x input, 1x output), 1x line in,1x line out, 1x miniUSB • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years) • Bundle content: Mx-M73A-RJ45, Mx-O-M73TB-640R080, Mx-F-MSA, Mx-O-M7SA-Blind

4047438043458	29,6 cm
90251900	26,8 cm
2.814 9	18,0 cm
	14,3 l



Mx-M73TA-B640R100-EN54 M73A Thermographic Camera TR(B), VGA, R100 (45°) - EN54

EN54 bundle • M73A IP camera module (body) for connecting up to 1 additional optical sensor module (to be ordered individually) • ONVIF-S-compliant MOBOTIX 7 system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • VGA Thermal sensor (640 x 480 Pixel), with Thermal Radiometry, 45° x 37° • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: 120 dB Tripple Shutter • Functional module: MultiSense (PIR, temperature, brightness sensor, Microphone), 1x miniUSB • Operating conditions: IP66/IK07, -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W. supply via network cable. PoE Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 1x MOBOTIX module connection (optical), I/0 (1x input, 1x output), 1x line in,1x line out, 1x miniUSB • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years) • Bundle content: Mx-M73A-RJ45, Mx-O-M73TB-640R100, Mx-F-MSA, Mx-O-M7SA-Blind

4047438043465	29,6 cm
90251900	26,8 cm
2.814 9	18,0 cm
	14,3 l

All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX - 24.0.12025 - MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025



M73A Thermographic Camera TR(B), VGA, R150 (32°) - EN54

 $\mathsf{EN54}$ bundle \bullet M73A IP camera module (body) for connecting up to 1 additional optical sensor module (to be ordered individually) • ONVIF-S-compliant MOBOTIX 7 system platform with H.264 (Triple Streaming), H.265, MxPEG+ and M-JPEG • VGA Thermal sensor (640 x 480 Pixel), with Thermal Radiometry, 32° x 26° • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) ${\scriptstyle \bullet}$ Lens options (via sensor module): horizontal image angle from 95° to $15^\circ {\scriptstyle \bullet}$ Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: 120 dB Tripple Shutter • Functional module: MultiSense (PIR, temperature, brightness sensor, Microphone), 1x miniUSB • Operating conditions: IP66/IK07, -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) \bullet Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 1x MOBOTIX module connection (optical), I/0 (1x input, 1x output), 1x line in, 1x line out, 1x miniUSB ${\scriptstyle \bullet}$ Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years) • Bundle content: Mx-M73A-RJ45, Mx-O-M73TB-640R150, Mx-F-MSA, Mx-O-M7SA-Blind

4047438043472	29,6 cm
90251900	26,8 cm
2.814 g	18,0 cm
	14,3 l

29,6 cm

26,8 cm

29,6 cm

26,8 cm

18,0 cm 14,3 l

4047438050517

90251900



Mx-M73TA-IRIS-INT-T040

Mx-M73TA-B640R150-EN54

MOBOTIX M73TA T040 Irisity Intrusion Bundle

MOBOTIX M73TA Irisity Intrusion Bundle, consisting of: M73 Body with RJ45 connection box (Mx-M73A--320T140), 120° 4K IR-Cut D Light Module for Wide Lens App (Mx-APP-IRIS-C-INT)

rusion Bundle, consisting of: M73 Body with RJ45 -RJ45), 105° Thermal Module ECO 320 - T140 (Mx-O-M7SA Day & Night Sensor Module WIDE (Mx-O-M7SA-8DN040), IR s (Mx-F-IRA-S) and pre-installed Irisity Iris Core Intrusion	2.800 9	18,0 cm 14,3 l



Mx-M73TA-IRIS-INT-T080	4047438050500	29,6 cm
MOBOTIX M73TA T080 Irisity Intrusion Bundle	90251900	26,8 cm
MOBOTIX M73TA Irisity Intrusion Bundle, consisting of: M73 Body with RJ45 connection box (Mx-M73A-RJ45), 56° Thermal Module ECO 320 - T080 (Mx-O-M7SA -320T080), 60° 4K IR-Cut Day & Night Sensor Module WIDE (Mx-O-M7SA-BDN080), IR Light Module for Wide Lens (Mx-F-IRA-S) and pre-installed Irisity Iris Core Intrusion App (Mx-APP-IRIS-C-INT)	2.800 g	18,0 cm 14,3 l



Mx-M73TA-IRIS-INT-T150	4047438049436
MOBOTIX M73TA T150 Irisity Intrusion Bundle	90251900
MOBOTIX M73TA Irisity Intrusion Bundle, consisting of: M73 Body with RJ45 connection box (Mx-M73A-RJ45), 24° Thermal Module ECO 320 - T150 (Mx-O-M7SA	2.800 9
-320T150), 30° 4K IR-Cut Day & Night Sensor Module TELE (Mx-O-M7SA-8DN150), IR	
Light Module for Tele Lens (Mx-F-IRA-T) and pre-installed Irisity Iris Core Intrusion	
App (Mx-APP-IRIS-C-INT)	

Sensor Modules Thermal For S16A/S16B

	Mx-O-SMA-TS-R090 Thermal Sensor Module TR for S16/S15, 50 mK, B090 (35°) Thermal Sensor Module TR for the S16/S15 • Thermal radiometry (TR): calibrated	4047438048408 90275000	17,5 cm 14,0 cm	
6		90275000	14,0 cm	
	Thermal Sensor Module TR for the S16/S15 • Thermal radiometry (TR): calibrated			
	thermal sensor for temperature events from -40 to 550°C (-40 to 1022°F) • NETD typ.	650 g	13,5 cm	
	50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second • Germanium Lens (included): B090 equivalent, horizontal/vertical image angle 35°/27° • Image size: 336 x 252 pixels (can be scaled up to 6MP) • IP66, -30 to 60°C (-22 to 140°F) • Housing: Black anodized aluminum • Camera connection via MOBOTIX sensor cable (max. 3 m/9.8 ft, to be ordered individually)		3,3 l	
	Mx-O-SMA-TS-R079	4047438030090	17,5 cm	
	Thermal Sensor Module TR For \$16/\$15, 50 mK, B079 (45°)	90275000	14,0 cm	
	Thermal Sensor Module TR for the S16/S15 • Thermal radiometry (TR): calibrated	650 g	13,5 cm	
	thermal sensor for temperature events from -40 to 550°C (-40 to 1022°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second • Germanium Lens (included): B079 equivalent,		3,3 l	
	horizontal/vertical image angle 45°/35° • Image size: 336 x 252 pixels (can be scaled up to 6MP) • IP66, -30 to 60°C (-22 to 140°F) • Housing: Black anodized aluminum •			



individually)

M	c-O-SMA-TS-R119	4047438030106	17,5 cm
Th	ermal Sensor Module TR For S16/S15, 50 mK, B119 (25°)	90275000	14,0 cm
the 50 r fran hor up Car	ermal Sensor Module TR for the S16/S15 • Thermal radiometry (TR): calibrated rmal sensor for temperature events from -40 to 550°C (-40 to 1022°F) • NETD typ. mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 mes per second • Germanium Lens (included): B119 equivalent, izontal/vertical image angle 25°/J9° • Image size: 336 x 252 pixels (can be scaled to 6MP) • IP66, -30 to 60°C (-22 to 140°F) • Housing: Black anodized aluminum • mera connection via MOBOTIX sensor cable (max. 3 m/9.8 ft, to be ordered ividuallv)	650 g	13,5 cm 3,3 l



	Mx-O-SMA-TS-R237	4047438030113	17,5 cm	
	Thermal Sensor Module TR For S16/S15, 50 mK, B237 (17°)	90275000	14,0 cm	
);	Thermal Sensor Module TR for the S16/S15 • Thermal radiometry (TR): calibrated thermal sensor for temperature events from -40 to 550°C (-40 to 1022°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second • Germanium Lens (included): B237 equivalent, horizontal/vertical image angle 17°/13° • Image size: 336 x 252 pixels (can be scaled up to 6MP) • IP66, -30 to 60°C (-22 to 140°F) • Housing: Black anodized aluminum • Camera connection via MOBOTIX sensor cable (max. 3 m/9.8 ft, to be ordered individually)	650 9	13,5 cm 3,3 l	



Mx-O-SMA-TP-R079 4047438030120 19,6 cm PTMount-Thermal TR For S16/S15, 50 mK, B079 (45°), White 90275000 18,0 cm PTMount-Thermal TR for the S16/S15 • Thermal radiometry (TR): calibrated thermal 890 g 14,8 cm sensor for temperature events from -40 to 550°C (-40 to $1022^\circ F)$ • NETD typ. 50 mK, 5,2 l <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second • Germanium Lens (2 m/6.6 ft, included): B079 equivalent, horizontal/vertical image angle 45°/35° • Image size: 336 x 252 pixels (can be scaled up to 6MP) • IP66, -30 to 60°C (-22 to 140°F) • Camera connection via MOBOTIX sensor cable (2 m/6.6 ft, included) • Color: White

ΜΟΒΟΤΙΧ

1	(

Mx-O-SMA-TP-R119	4047438030137	19,6 cm
PTMount-Thermal TR For \$16/\$15, 50 mK, B119 (25°), White	90275000	18,0 cm
PTMount-Thermal TR for the S16/S15 • Thermal radiometry (TR): calibrated thermal sensor for temperature events from -40 to 550 °C (-40 to 1022°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second • Germanium Lens (2 m/6.6 ft, included): B119 equivalent, horizontal/vertical image angle 25°/19° • Image size: 336 x 252 pixels (can be scaled up to 6MP) • IP66, -30 to 60°C (-22 to 140°F) • Camera connection via MOBOTIX sensor cable (2 m/6.6 ft, included) • Color: White	890 9	14,8 cm 5,2 l

4047438030144

4047438030151

4047438030168

4047438030175

90275000

90275000

650 g

890 g

90275000

890 g

90275000

890 g

90275000

890 g

19,6 cm

18,0 cm

14,8 cm

5,2 l

19,6 cm

18,0 cm

14,8 cm

5,2 l

19,6 cm

18.0 cm

14,8 cm

5,2 l

19.6 cm

18,0 cm

14,8 cm


5,2 l

17,5 cm

14,0 cm

13,5 cm

3,3 l

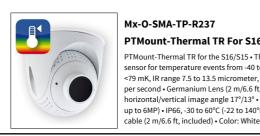

Mx-O-SMA-TP-R237 PTMount-Thermal TR For S16/S15, 50 mK, B237 (17°), White PTMount-Thermal TR for the S16/S15 • Thermal radiometry (TR): calibrated thermal sensor for temperature events from -40 to 550°C (-40 to 1022°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second · Germanium Lens (2 m/6.6 ft, included): B237 equivalent, horizontal/vertical image angle $17^{\circ}\!/13^{\circ}$ \bullet Image size: 336 x 252 pixels (can be scaled up to 6MP) • IP66, -30 to 60°C (-22 to 140°F) • Camera connection via MOBOTIX sensor



Mx-O-SMA-TP-R0	79-b

PTMount-Thermal TR For S16/S15, 50 mK, B079 (45°), Black

al TP for the S16/S15 - Thermal radiometry (TP): calibrated thermal PTMc sens <79 r per s horiz up to cabl

iount-Thermal TR for the \$16/\$15 • Thermal radiometry (TR): Calibrated thermal
sor for temperature events from -40 to 550 °C (-40 to 1022°F) • NETD typ. 50 mK,
mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames
second • Germanium Lens (2 m/6.6 ft, included): B079 equivalent,
zontal/vertical image angle 45°/35° • Image size: 336 x 252 pixels (can be scaled
o 6MP) • IP66, -30 to 60°C (-22 to 140°F) • Camera connection via MOBOTIX sensor
le (2 m/6.6 ft, included) • Color: Black



Mx-O-SMA-TP-R119-b

PTMount-Thermal TR For S16/S15, 50 mK, B119 (25°), Black

PTMount-Thermal TR for the S16/S15 • Thermal radiometry (TR): calibrated thermal sensor for temperature events from -40 to 550°C (-40 to 1022°F) • NETD typ, 50 mK. <79 mK. IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second • Germanium Lens (2 m/6.6 ft, included): B119 equivalent, horizontal/vertical image angle 25°/19° • Image size: 336 x 252 pixels (can be scaled up to 6MP) • IP66, -30 to 60°C (-22 to 140°F) • Camera connection via MOBOTIX sensor cable (2 m/6.6 ft, included) • Color: Black



Mx-O-SMA-TP-R237-b

PTMount-Thermal TR For S16/S15, 50 mK, B237 (17°), Black

PTMount-Thermal TR for the S16/S15 • Thermal radiometry (TR): calibrated thermal sensor for temperature events from -40 to 550°C (-40 to 1022°F) • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second · Germanium Lens (2 m/6.6 ft, included): B237 equivalent, horizontal/vertical image angle 17°/13° • Image size: 336 x 252 pixels (can be scaled up to 6MP) • IP66, -30 to 60°C (-22 to 140°F) • Camera connection via MOBOTIX sensor cable (2 m/6.6 ft, included) • Color: Black



Mx-O-SMA-TS-T079 4047438029049 Thermal Sensor Module For S16/S15, 50 mK, B079 (45°) Suitable for: S16/S15 (to be ordered individually) • Highly sensitive thermal image sensor: NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro


bolometer, up to 9 frames per second • Germanium Lens (included): B079, horizontal/vertical image angle 45°/35° • Image size: 336 x 252 pixels (can be scaled up to 6MP) • IP66, -30 to 60°C (-22 to 140°F) • Housing: Black anodized aluminum • Camera connection via MOBOTIX sensor cable (max. 3 m/9.8 ft, to be ordered individually)



	Mx-
50 mK	The
720 C	Suita
	senso
	bolor
	horiz
1 × 1	up to
	Came
	indiv
	J

O-SMA-TS-T119 ermal Sensor Module For S16/S15, 50 mK, B119 (25°)

able for: S16/S15 to be ordered individually) • Highly sensitive thermal image sor: NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro meter, up to 9 frames per second • Germanium Lens (included): B119, zontal/vertical image angle 25°/19° • Image size: 336 x 252 pixels (can be scaled 6MP) • IP66, -30 to 60°C (-22 to 140°F) • Housing: black anodized aluminum era connection via MOBOTIX sensor cable (max. 3 m/9.8 ft, to be ordered /idually)

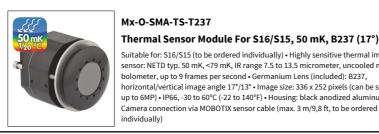

Mx-O-SMA-TS-T237	4047438029063	17,5 cm
Thermal Sensor Module For \$16/\$15, 50 mK, B237 (17°)	90275000	14,0 cm
Suitable for: S16/S15 (to be ordered individually) • Highly sensitive thermal image sensor: NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second - Germanium Lens (included): B237, horizontal/vertical image angle 17°/13° • Image size: 336 x 252 pixels (can be scaled up to 6MP) • IP66, -30 to 60°C (-22 to 140°F) • Housing: black anodized aluminum •	650 9	13,5 cm 3,3 l



Mx-O-SMA-TP-T079
PTMount-Thermal For S16/S15, 50 mK, B079 (45°), WI
PTMount-Thermal with integrated highly sensitive thermal image sensor for S16/S15 • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncoor bolometer, up to 9 frames per second • Germanium Lens (included): B079, horizontal/vertical image angle 45°/35° • Image size: 336 x 252 pixels (can b up to 6MP) • Operating conditions: IP66, -30 to 60°C (-22 to 140°F) • Camera connection via MOBOTIX sensor cable (2 m/6.6 ft, included) • Color: White

	4047438029070	19,6 cm
S15, 50 mK, B079 (45°), White	90275000	18,0 cm
hly sensitive thermal image sensor for the range 7.5 to 13.5 micrometer, uncooled micro • Germanium Lens (included): B079, °• Image size: 336 x 252 pixels (can be scaled 6, -30 to 60°C (-22 to 140°F) • Camera	890 9	14,8 cm 5,2 l

4047438029056

90275000

650 g

17,5 cm

14,0 cm

13,5 cm 3,3 l



Mx-O-SMA-TP-T119 PTMount-Thermal For \$16/\$15, 50 mK, B119 (25°), White

connection via MOBOTIX sensor cable (2 m/6.6 ft. included) • Color: White

PTMount-Thermal with integrated highly sensitive thermal in S16/S15 • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micro bolometer, up to 9 frames per second • Germanium Lens (inc horizontal/vertical image angle 25°/19° • Image size: 336 x 252 up to 6MP) • Operating conditions: IP66, -30 to 60°C (-22 to 14 connection via MOBOTIX sensor cable (2 m/6.6 ft, included) •

mage sensor for the	890 g	14,8 cm
ometer, uncooled micro		1
cluded): B119,		5,2 l
2 pixels (can be scaled		
40°F) • Camera		
Color: White		

4047438029087

90275000

19,6 cm

18,0 cm



Mx-O-SMA-TP-T237 4047438029094 19,6 cm PTMount Thermal For S16/S15, 50 mK, B237 (17°), White 90275000 18,0 cm PTMount-Thermal with integrated highly sensitive thermal image sensor for the 890 g 14,8 cm S16/S15 • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro 5,2 l bolometer, up to 9 frames per second • Germanium Lens (included): B237, horizontal/vertical image angle $17^{\circ}/13^{\circ}$ \bullet Image size: 336 x 252 pixels (can be scaled up to 6MP) • Operating conditions: IP66, -30 to 60°C (-22 to 140°F) • Camera



Mx-O-SMA-TP-T079-b	4047438030021	19,6 cm
PTMount-Thermal For S16, S15, 50 mK, B079 (45°), Black	90275000	18,0 cm
PTMount-Thermal with integrated highly sensitive thermal image sensor for the S16, S15 • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second - Germanium Lens (included): B079, horizontal/vertical image angle 45°/35° • Image size: 336 x 252 pixels (can be scaled up to 6MP) • Operating conditions: IP66, -30 to 60°C (-22 to 140°F) • Camera connection via MOBOTIX sensor cable (2 m/6.6 ft, included) • Color: Black	890 9	14,8 cm 5,2 l

333	Mx-O-SMA-TP-T119-b	4047438030038	19,6 cm
50 mK	PTMount-Thermal For S16, S15, 50 mK, B119 (25°), Black	90275000	18,0 cm
	PTMount-Thermal with integrated highly sensitive thermal image sensor for the S16, S15 • NETD typ. 50 mK, <79 mK, IR range 7.5 to 13.5 micrometer, uncooled micro bolometer, up to 9 frames per second • Germanium Lens (included): B119, horizontal/vertical image angle 25°/19° • Image size: 336 x 252 pixels (can be scaled up to 6MP) • Operating conditions: IP66, -30 to 60°C (-22 to 140°F) • Camera connection via MOBOTIX sensor cable (2 m/6.6 ft, included) • Color: Black	890 g	14,8 cm 5,2 l
	Мх-О-ЅМА-ТР-Т237-Ъ	4047438030045	19,6 cm
50 mK	Mx-O-SMA-TP-T237-b PTMount Thermal For S16, S15, 50 mK, B237 (17°), Black	4047438030045 90275000	19,6 cm 18,0 cm
50 mK			,

S74 Thermal Bundle

Article No. / Name / Description	EAN / HS / weight	dimen.
Mx-S74TA-B336R100-EN54	4047438043489	40,8 cm
S74A Thermographic Camera TR(B), CIF, R100 (45°) - EN54	90251900	31,2 cm
 STAA THEINOGI APIIL Callet A TK(B), CLT, KLOV(45) / ENSA ENS4 bundle • ST4A IP camera module (body) for connecting up to two additional functional and optical sensor modules (to be ordered individually) • ONVIF-S/T-compliant MOBOTIX 7 system platform with H.264/H.265 (Triple Streaming), MxPEG4 and M-JPEG • CIF Thermal sensor (336x256 Pixel), with Thermal Radiometry, 45° x 35° • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: up to 120 dB • Functional extensions (via optional MOBOTIX modules): IR Light (supports 15°, 45°, 95° lenses), USB-C • Operating conditions: IP66/IK010 (housing), -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX module (Ethernet 1000BaseT), 2x MOBOTIX module connection (1x optical/1x functional), USB-C, further connections is interface board • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years) • Bundle content: Mx-S74A, Mx-F-S7A-RJ45-VDC, Mx-O- 	3.520 g	20,2 cm 25,7 l



Mx-S74TA-B336R150-EN54 S74A Thermographic Camera TR(B), CIF, R150 (25°) - EN54

EN54 bundle • S74A IP camera module (body) for connecting up to two additional functional and optical sensor modules (to be ordered individually) • ONVIF-S/Tcompliant MOBOTIX 7 system platform with H.264/H.265 (Triple Streaming), MxPEG+ and M-JPEG • CIF Thermal sensor (336x256 Pixel), with Thermal Radiometry, 25° x 19° • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 \cdot WDR: up to 120 dB \cdot Functional extensions (via optional MOBOTIX modules): IR Light (supports 15°, 45°, 95° lenses), USB-C • Operating conditions: IP66/IK010 (housing), -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 2x MOBOTIX module connection (1x optical/1x functional), USB-C, further connections via interface board • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years) • Bundle content: Mx-S74A, Mx-F-S7A-RJ45-VDC, Mx-O-M7SB-336RP150, Mx-F-MSA, Mx-M-PTMA, 2xMx-A-S7A-CBL03-AN

40,8 cm
31,2 cm
20,2 cm
25,7 l

Mx-S74TA-B336R280-EN54

S74A Thermographic Camera TR(B), CIF, R280 (17°) - EN54

EN54 bundle • S74A IP camera module (body) for connecting up to two additional functional and optical sensor modules (to be ordered individually) • ONVIF-S/Tcompliant MOBOTIX 7 system platform with H.264/H.265 (Triple Streaming), MxPEG+ and M-JPEG • CIF Thermal sensor (336x256 Pixel), with Thermal Radiometry, 17° x 13° • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: up to 120 dB • Functional extensions (via optional MOBOTIX modules): IR Light (supports 15°, 45°, 95° lenses), USB-C • Operating conditions: IP66/IK010 (housing), -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) •• Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 2x MOBOTIX module connection (1x optical/1x functional), USB-C, further connections via interface board • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years) • Bundle content: Mx-S74A, Mx-F-S7A-RJ45-VDC, Mx-O-M7SB-336RP280, Mx-F-MSA, Mx-M-PTMA, 2xMx-A-S7A-CBL03-AN

4047438043502	40,8 cm
90251900	31,2 cm
3.520 g	20,2 cm
	25,7 l



S74A Thermographic Camera TR(B), VGA, R050 (90°) - EN54

EN54 bundle • S74A IP camera module (body) for connecting up to two additional functional and optical sensor modules (to be ordered individually) • ONVIF-S/Tcompliant MOBOTIX 7 system platform with H.264/H.265 (Triple Streaming), MxPEG+ and M-JPEG • VGA Thermal sensor (640x480 Pixel), with Thermal Radiometry, 90° x 69° • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: up to 120 dB • Functional extensions (via optional MOBOTIX modules): IR Light (supports 15°, 45°, 95° lenses), USB-C • Operating conditions: IP66/IK010 (housing), -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 2x MOBOTIX module connection (1x optical/1x functional), USB-C, further connections via interface board • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years) • Bundle content: Mx-S74A, Mx-F-S7A-RJ45-VDC, Mx-O-M7SB-640RP050, Mx-F-MSA, Mx-M-PTMA, 2xMx-A-S7A-CBL03-AN

4047438043519	40,8 cm
90251900	31,2 cm
3.520 g	20,2 cm
	25,7 l

Mx-S74TA-B640R080-EN54

Mx-S74TA-B640R050-EN54

S74A Thermographic Camera TR(B), VGA, R080 (69°) - EN54

EN54 bundle • S74A IP camera module (body) for connecting up to two additional functional and optical sensor modules (to be ordered individually) • ONVIF-S/Tcompliant MOBOTIX 7 system platform with H.264/H.265 (Triple Streaming), MxPEG+ and M-JPEG • VGA Thermal sensor (640x480 Pixel), with Thermal Radiometry, 69° x 56° • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: up to 120 dB • Functional extensions (via optional MOBOTIX modules): IR Light (supports 15°, 45°, 95° lenses), USB-C • Operating conditions: IP66/IK010 (housing), -40 to 65°C (-40 to 149 °F) \bullet Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 2x MOBOTIX module connection (1x optical/1x functional), USB-C, further connections via interface board · Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years) • Bundle content: Mx-S74A, Mx-F-S7A-RJ45-VDC, Mx-O-M7SB-640RP080, Mx-F-MSA, Mx-M-PTMA, 2xMx-A-S7A-CBL03-AN

4047438043526	40,8 cm
90251900	31,2 cm
3.520 g	20,2 cm
	25,7 l

Mx-S74TA-B640R100-EN54 4047438043533 40,8 cm S74A Thermographic Camera TR(B), VGA, R100 (45°) - EN54 90251900 31.2 cm EN54 bundle • S74A IP camera module (body) for connecting up to two additional 3.520 g 20,2 cm functional and optical sensor modules (to be ordered individually) • ONVIE-S/T-25,7 l compliant MOBOTIX 7 system platform with H.264/H.265 (Triple Streaming), MxPEG+ and M-JPEG • VGA Thermal sensor (640x480 Pixel), with Thermal Radiometry, 45° x 37° • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) • Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: up to 120 dB • Functional extensions (via optional MOBOTIX modules): IR Light (supports 15°, 45°, 95° lenses), USB-C • Operating conditions: IP66/IK010 (housing), -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 jack for weatherproof network connection via MOBOTIX patch cable (Ethernet 1000BaseT), 2x MOBOTIX module connection (1x optical/1x functional), USB-C, further connections via interface board • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years) • Bundle content: Mx-S74A, Mx-F-S7A-RJ45-VDC, Mx-O-

M7SB-640RP100, Mx-F-MSA, Mx-M-PTMA, 2xMx-A-S7A-CBL03-AN



S74A Thermographic Camera TR(B), VGA, R150 (32°) - EN54

Mx-S74TA-B640R150-EN54

EN54 bundle • S74A IP camera module (body) for connecting up to two additional functional and optical sensor modules (to be ordered individually) • ONVIF-S/Tcompliant MOBOTIX 7 system platform with H.264/H.265 (Triple Streaming), MxPEG+ and M-JPEG • VGA Thermal sensor (640x480 Pixel), with Thermal Radiometry, 32° x 26° • Image sensor options (via sensor module): 4K (8 megapixels), color (day) and/or B/W (night) and/or color (day/night with IR cut) ${\scriptstyle \bullet}$ Lens options (via sensor module): horizontal image angle from 95° to 15° • Max. image size (per image sensor): 4K UHD (3840 x 2160 pixels), 16:9 • WDR: up to 120 dB • Functional extensions (via optional MOBOTIX modules): IR Light (supports 15°, 45°, 95° lenses), USB-C • Operating conditions: IP66/IK010 (housing), -40 to 65°C (-40 to 149 °F) • Internal DVR: 8 GB microSD (for MxPEG+ recordings) • Max. Power consumption: 25 W, supply via network cable, PoE Class 4 (IEEE 802.3af/at) • Connections: 1x RJ45 jack for weather proof network connection via MOBOTIX patch cable (Ethernet 1000 BaseT), 2x MOBOTIX module connection (1x optical/1x functional), USB-C, further connections via interface board • Software interface for MOBOTIX Certified Apps (based on Deep Learning, approx. 20 different 30-day demo versions pre-installed) • Housing: Aluminium, PBT-30GF • Color: white • Warranty: 5 years (optionally extendable up to 8 years) • Bundle content: Mx-S74A, Mx-F-S7A-RJ45-VDC, Mx-O-M7SB-640RP150, Mx-F-MSA, Mx-M-PTMA, 2xMx-A-S7A-CBL03-AN

4047438043540	40,8 cm
90251900	31,2 cm
3.520 g	20,2 cm
	25,7 l

p71A ECO Thermal Camera

Article No. / Name / Description	EAN / HS / weight	dimen.
Mx-p71TA-320T040	4047438042499	19,6 cm
p71 Thermal ECO 320 - T040	90251900	18,0 cm
p71 Indoor camera with Thermal ECO module 320-T040. CIF 320x240 • 9fps • 105 x 75°; 5,23mr • NETD: 65mK (typ); < 100mK (max) • build in ambient temperature sensor • IR Range 7,8 to 14µm • 3-axis mechanical pan/tilt head • Operating temperature range: -10 to +50 °C - Built-in speaker and microphone • USB-C • 8GB memory card included	1.175 9	14,8 cm 5,2 l



Mx-p71TA-320T080	4047438042505	19,6 cm
p71 Thermal ECO 320 - T080	90251900	18,0 cm
p71 Indoor camera with Thermal ECO 320-T080. CIF 320x240 • 9fps • 56 x 42°; 3mr • NETD: 65mK (typ); < 100mK (max) • IR Range 7,8 to 14µm • 3-axis mechanical pan/tilt head • Operating temperature range: -10 to +50 °C - Built-in speaker and microphone • USB-C • 86B memory card included	1.175 9	14,8 cm 5,2 l

мовотіх

MOBOTIX MOVE Cameras

Beyond Human Vision

MOBOTIX

All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX • 24.01.2025 • MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025

MOBOTIX MOVE Speed Dome Cameras

MOBOTIX MOVE Speed Dome Cameras

Article No. / Name / Description EAN / HS / weight dimen. Mx-SD1A-540-IR-VA 4047438045049 40.2 cm MOBOTIX MOVE SpeedDome SD-540-IR-VA (DNN Analytics) 85258900 25,0 cm MOBOTIX MOVE SpeedDome Network Camera SD-540-IR-VA •Weatherproof motor-5.950 g 37,0 cm driven ONVIF S / G /T/M Dome PTZ camera ${\scriptstyle \bullet}$ 10 Integrated Video Analytic Function 37,2 l incl. DNN Face- and License-Plate Recognition, linkable to PTZ Presets • Up to 40x optical zoom • Image sensor: 5MP SONY STARVIS II IMX675 (2608 x 1964), 1/2.8" Progressive CMOS • Automatic switching from color to B / W image (mechanical IR cut filter) • Motor-controlled Zoom lens (F1.6-F4.95: 4.3 to 170 mm, viewing angle HxV: 62,6 ° - 1,9 ° x 48,8 ° -1.4 °) with autofocus and P-Iris with automatic adaptation to changing light situations • Auto Object Tracking, DNN based (Humans, Vehicles) +2D & 3D Motion Compensated Noise Reduction (MCTF) +IR LEDs (working distance up to 300m)• IP66 • Ambient temperature -40 to 55°C, humidity 10 to 90% • Video codecs: H.264, H.265, MJPEG (up to 4 streams simultaneously) • Wide Dynamic Range (130 dB) • Max. Frame rate: 5MP @ 30 fps (H.264, with and without WDR enabled); MJPEG: 1080p @ 30 fps • Power supply: PoE++ IEEE802.3bt, max. 51 W, AC24V max. 59.05 W / 87.12 VA • Hardened and "self-cleaning" anti-reflex camera front glass coating by MOBOTIX EverClear • MTBF: 50.000h • Warranty: 5 years



Mx-SD1A-831-LIR-VA

MOBOTIX MOVE SpeedDome SD-831-LIR-VA LIDAR (DNN

MOBOTIX MOVE SpeedDome Network Camera SD-831-LIR-VA •Weatherproof motordriven ONVIF S / G /T/M Dome PTZ camera •10 Integrated Video Analytic Function incl. DNN Face- and License-Plate Recognition, linkable to PTZ Presets • Up to 31x optical zoom • Precise LiDAR Focusing System • Image sensor: 8MP SONY STARVIS II IMX678 (3856 x 2180) 4K, 1/1.8" Progressive CMOS • Automatic switching from color to B / W image (mechanical IR cut filter) • Motor-controlled Zoom lens (F1.35-F4.6: 6.9 to 214.6 mm, viewing angle HxV: 61.8 ° - 2.2 ° x 35.9 ° -1.3 °) with autofocus and P-Iris with automatic adaptation to changing light situations • Auto Object Tracking, DNN based (Humans, Vehicles)•IR LEDs (working distance up to 300m •2D & 3D Motion Compensated Noise Reduction (MCTF) IR LEDs (working distance up to 200m IP66 -Ambient temperature -40 to 55°C, humidity 10 to 90% • Video codecs: H.264, H.265, MJPEG (up to 4 streams simultaneously) • Wide Dynamic Range (130 dB) • Max. Frame rate: 8MP @ 30 fps (H.264, with and without WDR enabled): MJPEG: 1080p @ 30 fps • Power supply: PoE++ IEEE802.3bt, max. 51 W, AC24V max. 53,10 W / 74,80 VA • Hardened and "self-cleaning" anti-reflex camera front glass coating by MOBOTIX EverClear • MTBF: 50.000h • Warranty: 5 years

4047438045056	33,0 cm
85258900	33,0 cm
7.640 9	54,0 cm
	58,8 l



Mx-SD2A-230-LL-FM-VA

MOBOTIX MOVE SpeedDome SD-230-LL-FM-VA Low Light

MOBOTIX MOVE SpeedDome Network Camera SD-230-LL-FM-VA •Weatherproof motor-driven ONVIF S / G /T/M Indoor Dome PTZ camera for ceiling flush mount • 10 Integrated Video Analytic Function incl. DNN Face- and Licen10 Integrated Video Analytic Function incl. DNN Face- and License-Plate Recognition, linkable to PTZ Presets • Up to 30x optical zoom • Image sensor: 2MP SONY STARVIS II IMX662 (1936 x 1100), 1/2.8" Progressive CMOS • Automatic switching from color to B / W image (mechanical IR cut filter) • Motor-controlled Zoom lens (F1.6-F4.7: 4.3 to 129 mm, viewing angle HxV: 59.3 ° - 2.3 ° x 34.9 ° -1.4 °) with autofocus and P-Iris with automatic adaptation to changing light situations • Auto Object Tracking, DNN based (Humans, Vehicles) •2D & 3D Motion Compensated Noise Reduction (MCTF) • Ambient temperature -40 to 55°C, humidity 10 to 90% • Video codecs: H.264, H.265, MJPEG (up to 3 streams simultaneously) ${\scriptstyle\bullet}$ Wide Dynamic Range (130 dB) ${\scriptstyle\bullet}$ Max. Frame rate: 2MP @ 30 fps (H.264, with and without WDR enabled): MJPEG: 1080p @ 30 fps • Power supply: PoE+ IEEE802.3at, max, 17.71 W, AC24V max, 17.10 W / 32.76 VA • Hardened and "self-cleaning" anti-reflex dome bubble coating by MOBOTIX EverClear • MTBF: 50.000h • Warranty: 5 years

4047438045032	31,0 cm
85258900	31,0 cm
3.970 g	38,0 cm
	36.5 l



Mx-SD2A-230-LL-VA

MOBOTIX MOVE SpeedDome SD-230-LL-VA Low Light (DNN

MOBOTIX MOVE SpeedDome Network Camera SD-230-LL-VA •Weatherproof motordriven ONVIF S / G /T/M Dome PTZ camera •10 Integrated Video Analytic Function incl. DNN Face- and License-Plate Recognition, linkable to PTZ Presets • Up to 30x optical zoom • Image sensor: 2MP SONY STARVIS II IMX662 (1936 x 1100), 1/2.8" Progressive CMOS • Automatic switching from color to B / W image (mechanical IR cut filter) • Motor-controlled Zoom lens (F1.6-F4.7: 4.3 to 129 mm, viewing angle HxV: 59.3° - 2.3° x 34.9° • 1.4°) with autofocus and P-Iris with automatic adaptation to changing light situations • Auto Object Tracking, DNN based (Human, Vehicles) • 2D & 3D Motion Compensated Noise Reduction (MCTF) • IP66, IK10 • Ambient temperature -40 to 55°C, humidity 10 to 90% • Video codecs: H.264, H.265, MJPEG (up to 3 streams simultaneously) • Wide Dynamic Range (130 dB) • Max. Frame rate: 2MP @ 30 fps (H.264, with and without WDR enabled); MJPEG: 1080p @ 30 fps • Power supply: PoE + IEEE802.3at, max. 25.5 W, AC24V max. 29.04 W / 53.24 VA • Hardened and "selfcleaning" anti-reflex dome bubble coating by MOBOTIX EverClear • MTBF: 50.000h • Warranty: 5 years

4047438045025	42,5 cm
85258900	26,2 cm
5.150 g	35,0 cm
	39,0 l

MOBOTIX MOVE Vandal Dome Cameras

MOBOTIX MOVE Vandal Dome Cameras

MOBOTIXMO

Article No. / Name / Description	EAN / HS / weight	dimen.
Mx-VT1A-2-IR	4047438048200	16,5 cm
MOBOTIX MOVE Vandal Turret Mx-VT-2-IR	85258900	16,5 cm
MOBOTIX MOVE Vandal Turret Network Camera Mx-VT-2-IR • Max. Image Resolution: 2MP (1920x1080), 1/2.8" Progressive CMOS • ONVIF S/G/T/M camera with integrated R LEDs (up to 30 m) for day and night operation • Automatic changeover from color o B/W image (mechanical IR cut filter) • Fixed lens (F1.6: 2.8 mm), viewing angle H: 105°, V: 56 °) • 3-axis adjustment(Pan/Tilt/Rotation)• IP67/IK10 • Ambient emperature • 30 to 60°C, humidity 10 to 90% non-condensing • Video codecs: H.264, 1.265, MJPEG (up to 3 video-streams simultaneously) • Built-in Microphone• True NDR (120 dB) • Max. Frame rate: 2MP H.264, H.265 @ 30 fps; MJPEG: 1080p @ 30 fps • Power supply: PoE IEEE802.3af Class 3, 12V DC max. 10 W • MTBF: 95.000h • Warranty 5 years		15,4 cm 4,2 l

4047438048262

4047438048255

4047438048279

85258900

980 g

85258900

950 g

16,5 cm

16,5 cm

16,5 cm

15,4 cm

4,2 l

16,5 cm

16,5 cm

15,4 cm

4,2 l



Mx-VT1A-203-IR

MOBOTIX MOVE Vandal Turret Mx-VT-203-IR	85258900	16,5 cm
MOBOTIX MOVE Vandal Turret Network Camera Mx-VT-203-IR • Max. Image Resolution: 2MP (1920x1080), 1/2.8" Progressive CMOS • ONVIF S/G/T/M camera with integrated IR LEDs (up to 30 m) for day and night operation • Automatic changeover from color to B/W image (mechanical IR cut filter) • Motor-controlled varifocal lens (F1.4-2.8: 2.7 to 13.5 mm, viewing angle H: 111 °-34 °, V: 61 °-19 °) • 3-axis adjustment (Pan/Til/Rotation) • IP67/IK10 • Ambient temperature -30 to 60°C, humidity 10 to 90% non-condensing • Video codecs: H.264, H.265, MJPEG (up to 3 video-streams	980 9	15,4 cm 4,2 l
simultaneously)• Built-in Microphone • True WDR (120 dB) • Max. Frame rate: 2MP H.264, H.265 @ 30 fps; MJPEG: 1080p @ 30 fps • Power supply: PoE IEEE802.3af Class		

3, 12V DC max. 10 W • MTBF: 95.000h • Warranty: 5 years



Mx-VT1A-5-IR

MOBOTIX MOVE Vandal Turret Mx-VT-5-IR


MOBOTIX MOVE Vandal Turret Network Camera Mx-VT-5-IR • Max. Image Resolution: 5MP (2592x1944), 1/2.8" Progressive CMOS ${\scriptstyle \bullet}$ ONVIF S/G/T/M camera with integrated IR LEDs (up to 30 m) for day and night operation • Automatic changeover from color to B/W image (mechanical IR cut filter) • Fixed lens (F1.6: 2.8 mm), viewing angle H: 97°, V: 70.5 °) • 3-axis adjustment(Pan/Tilt/Rotation) • IP67/IK10 • Ambient temperature -30 to 60°C, humidity 10 to 90% non-condensing • Video codecs: H.264, H.265, MJPEG (up to 3 video-streams simultaneously) • Built-in Microphone • True WDR (120 dB) • Max. Frame rate: 5MP H.264, H.265 @ 30 fps; MJPEG: 1080p @ 30 fps • Power supply: PoE IEEE802.3af Class 3, 12V DC max. 10 W • MTBF: 95.000h • Warranty: 5 vears

	M
MOBOTIX MOVe	M
	Ν
	R
	i
	f
	(1
	a
	h

Mx-VT1A-503-IR

MOBOTIX MOVE Vandal Turret Mx-VT-503-IR

MOBOTIX MOVE Vandal Turret Network Camera Mx-VT-503-IR • Max. Image Resolution: 5MP (2592x1944), 1/2.8" Progressive CMOS • ONVIF S/G/T/M camera with ntegrated IR LEDs (up to 30 m) for day and night operation • Automatic changeover rom color to B/W image (mechanical IR cut filter) • Motor-controlled varifocal lens F1.4-2.8: 2.7 to 13.5 mm, viewing angle H: 103 °-31 °, V: 76 °-23.5 °) • 3-axis djustment(Pan/Tilt/Rotation) • IP67/IK10 • Ambient temperature -30 to 60°C, numidity 10 to 90% non-condensing • Video codecs: H.264, H.265, MJPEG (up to 3 video-streams simultaneously) • Built-in Microphone • True WDR (120 dB) • Max. Frame rate: 5MP H.264, H.265 @ 30 fps; MJPEG: 1080p @ 30 fps • Power supply: PoE IEEE802.3af Class 3, 12V DC max. 10 W • MTBF: 95.000h • Warranty: 5 years

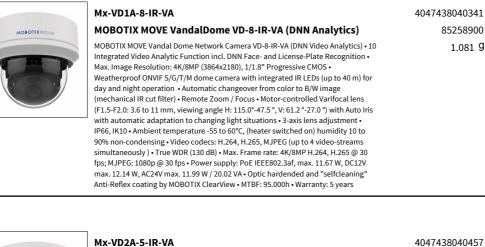

MOBOTIX MOVE VandalDome VD2-5-IR-VA (Video Analytics)

MOBOTIX MOVE Vandal Dome Network Camera VD2-5-IR-VA (Video Analytics) • Weatherproof ONVIF S/G/T dome camera with integrated IR LEDs (up to 40 m) for day and night operation • Max. Image Resolution: 5MP (2720 x 1976), 1/2.7" Progressive CMOS • Automatic changeover from color to B / W image (mechanical IR cut filter) • Remote Zoom • Motor-controlled Varifocal lens (F1.6-F2.9: 2.7 to 12 mm, viewing angle H: 102.1°-31.5 °, V: 70.3 °-22.7 °) with Auto Iris with automatic adaptation to changing light situations • 3-axis lens adjustment • IP66, IK10 • Ambient temperature -55 to 60°C, (heater switched on) humidity 10 to 90% noncondensing • Video codecs: H.264, H.265, MJPEG (up to 4 video-streams simultaneously) • True WDR (130 dB) • Max. Frame rate: 5MP H.264, H.265 30 fps • WDR on: H.265 / H.264: 2688x1944 @ 30 fps + 1024x768 @ 30 fps; MJPEG: 1080p @ 30 fps • WDR off: H.265 / H.264: 2688x1944 @ 30 fps + 1024x768 @ 30 fps; H.265 / H.264: 1920x1080 @ 60 fps + 1280x720 @ 60 fps; MJPEG: 1080p @ 60 fps • Power supply: PoE IEEE 802.3af or DC 12V (13W) or AC 24V; max 14 W • Hardened and "self-cleaning" anti-reflex dome bubble coating by MOBOTIX EverClear • MTBF: 95.000h • Warranty: 5 vears

4047438040457	17,5 cm
85258900	17,5 cm
1.210 g	17,0 cm
	5,2 l

85258900

1.081 g

17,3 cm

17,3 cm

16,6 cm

5,0 l



MOBOTIX MOVE VandalDome VD3-2-IR-VA (Video Analytics)

MOBOTIX MOVE Vandal Dome Network Camera VD3-2-IR-VA (Video Analytics) • Weatherproof ONVIF S/G/T dome camera with integrated IR LEDs (up to 40 m) for day and night operation • Max. Image Resolution: 2MP (1920 x 1080), 1/2.7" Progressive CMOS • Automatic changeover from color to B / W image (mechanical IR cut filter) • Remote Zoom • Motor-controlled Varifocal lens (F1.6-F2.9: 2.7 to 12 mm, viewing angle H: 99 °-31 °, V: 53 °-18 °) with Auto Iris with automatic adaptation to changing light situations • 3-axis lens adjustment • IP66, IK10 • Ambient temperature -55 to 60°C, (heater on) humidity 10 to 90% non-condensing • Video codecs: H.264, H.265, MJPEG (up to 4 video-streams simultaneously) • True WDR (130 dB) • Max. Frame rate: H.265 / H.264: 1920x1080 @ 30 fps + 720x480 @ 30 fps: M.IPEG: 1080p @ 30 fps • Power supply: PoE IEEE 802.3af or DC 12V (13W) or AC 24V; max 14 W• Hardened and "self-cleaning" anti-reflex dome bubble coating by MOBOTIX EverClear • MTBF: 95.000h • Warranty: 5 years

4047438040433	17,5 cm
85258900	17,5 cm
1.210 g	17,0 cm
	5,2 l



Mx-VD2A-2-IR	4047438038959	17,5 cm
MOBOTIX MOVE VandalDome VD2-2-IR	85258900	17,5 cm
MOBOTIX MOVE VandalDome Network Camera VD2-2-IR • Image sensor: 2MP (1920x1080), 1/3" Progressive CMOS • Weatherproof ONVIF S/G/T vandal dome camera with built-in IR LEDs (up to 40 m) for use with day and night • Automatic changeover from color to B / W image (mechanical IR cut filter) • Manually adjustable vario lens (F1.4: 2.8 to 12 mm, viewing angle H: 91 ° -34 °) • IP66 • IK10 • Ambient temperature -30 to 60°C (-22° to 140° F), humidity 10 to 90% • Video codecs: H.264, MJPEG (up to 4 streams simultaneously) • WDR (up to 130 dB) • Max. Frame rate: 2MP @ 60B / s (H.264, H.265 with and without WDR enabled); MJPEG: 1080p @ 30 B / s • Power supply: PoE IEEE 802.3af • Warranty: 5 years	1.010 9	17,0 cm 5,2 l

MOBOTIX MOVE Bullet Cameras

MOBOTIX MOVE Bullet Cameras

	Article No. / Name / Description	EAN / HS / weight	dimen.
	Mx-BC2A-2-IR	4047438038966	29,6 cm
-	MOBOTIX MOVE BulletCamera BC2-2-IR	85258900	20,0 cm
Pares -	MOBOTIX MOVE Bullet Network Camera BC2-2-IR • Image Resolution: 2MP (1920x1080), 1/2.7" Progressive CMOS • Weatherproof ONVIF S/G/T bullet camera with built-in IR LEDs (up to 15 m) for day and night operation • Automatic changeover from color to B / W image (mechanical IR cut filter) • Manually adjustable vario lens (F1.4: 2.8 to 12 mm, viewing angle H: 96.67° • 34.13° • V: 52.21° • 19.24°) • IP66 • Ambient temperature - 30 to 60° C (-22° to 140° F), humidity 10 to 95% • Video codecs: H.264, MJPEG (up to 4 streams simultaneously) • WDR (up to 130 dB) • Max. Frame rate: 2MP @ 30 fps (H.264, H.265 with and without WDR enabled); MJPEG: 1080p @ 30 fps • Power supply: POE IEEE 802.3af • MTBF: 95.000h • Warranty: 5 years	580 g	17,5 cm 10,4 l



Mx-VB1A-2-IR-ALPR

MOBOTIX MOVE ALPR Vandal Bullet Network Camera VB-2-

MOBOTIX MOVE ALPR Vandal Bullet Network Camera VB-2-IR-ALPR (License Plate Recognition) • Integrated professional international Automatic License Plate Recognition for stopped and slow moving vehicles up to 18m distance • incl. MMC (Make, Model,Color Detection) • ALPR Activation License Key pre-installed • Max. Image Resolution: 2 MP / 1080p (Full-HD), 1/2.8" Progressive CMOS (SONY) • Weatherproof ONVIF S/G/T/M bullet camera with integrated IR LEDs (up to 60m) for day and night operation • Automatic changeover from color to B/W image (mechanical IR cut filter) • Light-Sensitivity: Color: 0.02lx, B/W: 0.001lx, IR: 0lx • Remote Zoom / Focus • Motor-controlled Varifocal lens (F1.6-F2.9: 2.7 to 12 mm, viewing angle H: 102.1°-31.5°, V: 70.3°-22.7°), Auto Iris with automatic adaptation to changing light situations • Video codecs: H.264, H.265, MJPEG (up to 4 video-streams simultaneously) • True WDR (130 dB) • Max, Frame rate: 2 MP H.264, H.265 @ 30 fps: MJPEG: 1080p @ 30 fps • Bi-directional Audio (Line In/Out) • Alarm I/O • 64 GB SD-Karte pre-installed • Power supply: PoE IEEE802.3af, class 0, max 12.95 watt, DC12V, 15.59 watt, AC24V, max 13.31 watt, max 25.08 VA • IP67, IK10 • Ambient temperature -55 to 60°C, (heater switched on), Rel. humidity 10 to 90% non-condensing Hardened and "self-cleaning" anti-reflex Bullet front glass coating by MOBOTIX EverClear • MTBF: 95.000h • Warranty: 5 years

85258900	19,6 cm
1.740 9	17,8 cm
	9,9 l

4047438044295 **28,5** cm



Mx-VB1A-2-IR-D-ALPR

MOBOTIX MOVE ALPR Vandal Bullet Network Camera VB-2-

MOBOTIX MOVE ALPR Vandal Bullet Network Camera VB-2-IR-D-ALPR (License Plate Recognition) •Integrated professional international Automatic License Plate Recognition for slow and fast moving vehicles up to 35m distance • incl. MMC (Make, Model, Color Detection) • ALPR Activation License Key pre-installed • Max. Image Resolution: 2 MP / 1080p (Full-HD), 1/2.8" Progressive CMOS (SONY) • Weatherproof ONVIF S/G/T/M bullet camera with integrated IR LEDs (up to 60m) for day and night operation • Automatic changeover from color to B/W image (mechanical IR cut filter) Light-Sensitivity: Color: 0.02lx, B/W: 0.001lx, IR: 0lx • Remote Zoom / Focus • Motorcontrolled Zoom lens (F1.6-F2.4: 9 to 22 mm, viewing angle H: 36.1°-15.4 °, V: 19.8 ° -8.8 °), Auto Iris with automatic adaptation to changing light situations • Video codecs: H.264, H.265, MJPEG (up to 4 video-streams simultaneously) • True WDR (130 dB) • Max. Frame rate: 2 MP H.264, H.265 @ 30 fps; MJPEG: 1080p @ 30 fps • Bidirectional Audio (Line In/Out) • Alarm I/O • 64 GB SD-Karte pre-installed • Power supply: PoE IEEE802.3af, class 0, max 12.95 watt, DC12V, 15.59 watt, AC24V, max 13.31 watt, max 25.08 VA • IP67, IK10 • Ambient temperature -55 to 60°C, (heater switched on), Rel. humidity 10 to 90% non-condensing • Hardened and "selfcleaning" anti-reflex Bullet front glass coating by MOBOTIX EverClear • MTBF: 95.000h • Warranty: 5 years

4047438044318	28,5 cm
85258900	19,6 cm
1.740 9	17,8 cm
	9,9 l





MOBOTIX MOVE Vandal Bullet Network Camera VB3-2-IR-VA (Video Analytics) • Weatherproof ONVIF S / G / T dome camera with integrated IR LEDs (up to 40 m) for day and night operation • Max. Image Resolution: 2MP (1920 x 1080), 1/2.7" Progressive CMOS • Automatic changeover from color to B / W image (mechanical IR cut filter) • Remote Zoom • Motor-controlled Varifocal lens (F1.6-F2.9: 2.7 to 12 mm, viewing angle H: 99°-31°, V: 53°-18°) with Auto Iris with automatic adaptation to changing light situations • 3-axis lens adjustment • IP67, IK10 • Ambient temperature -55 to 60°C, (heater on) humidity 10 to 90% non-condensing • Video codecs: H.264, H.265, MJPEG (up to 4 video-streams simultaneously) • True WDR (130 dB) • Max. Frame rate:: H.265 / H.264: 1920x1080 @ 30 fps + 720x480 @ 30 fps; MJPEG: 1080 @ 30 fps • Power supply: POE IEEE 802.3af or DC 12V (13W) or AC 24V; max 14 W-Hardened and "self-cleaning" anti-reflex Bullet front glass coating by MOBOTIX EverClear • MTBF: 95.000h • Warranty: 5 years

4047438040440	29,6 cm
85258900	20,0 cm
1.460 9	17,5 cm
	10,4 l

MOBOTIX MOVE Hemispheric Vandal Dome

MOBOTIX MOVE Hemispheric Vandal Dome Camera

Article No. / Name / Description	EAN / HS / weight	dimen.
Mx-VH1A-12-IR-VA	4047438038317	17,3 cm
MOBOTIX MOVE 12MP Vandal Hemispheric	85258900	17,3 cm
MOBOTIX MOVE Vandal Hemispheric Network Camera Mx-VH1A-12-IR-VA • Image sensor: 12MP (4072 x 3046), 1/1.7" Progressive CMOS • Indoor • ONVIF S/G/T/M • Hemispheric camera with built-in IR LED illumination (up to 10 m) for use with day and night • Automatic changeover from color to B / W image (mechanical IR cut filter) • focal length 1.65 mm • IK10 • Ambient temperature - 10 to 55°C (14° to 131°F), humidity 10 to 90% • Video codecs: H.264, H.265, MJPEG (up to 4 streams simultaneously) • Max. Frame rate: 12MP@20 fps (Backend dewarping) 8.9MP@27 fps (Edge dewarping) • Power supply: PoE IEEE 802.3af • Warranty: 5 years • MTBF: 95.000h	640 g	10,7 cm 3,2 l

MOBOTIX MOVE Fixed Domes

Mx-MD1A-5-IR 4047438042475 16,5 cm MOBOTIX MOVE Indoor MicroDome Mx-MD-5-IR 85258900 16,5 cm MOBOTIX MOVE Indoor MicroDome Network Camera Mx-MD-5-IR • Max. Image Resolution: 5M (2720x1976), 1/2.7" Progressive CMOS • ONVIF S/G/T dome camera with integrated IR LEDs (up to 15 m) for day and night operation • Automatic changeover from color to B/W image (mechanical IR cut filter) • Fixed lens (F2.0: 2.8 mm), viewing angle H: 108.3°, V: - 76.5 °) • 3-axis lens adjustment • Indoor, IK8• Ambient temperature -30 to 55°C, humidity 10 to 90% non-condensing. • Video croders: H.264. H.265. MLPEG (up to 4 video-streams simultaneously.) • True WDR 3,7 l	Article No. / Name / Description	EAN / HS / weight	dimen.
MOBOTIX MOVE Indoor MicroDome Network Camera Mx-MD-5-IR • Max. Image Resolution: 5M (2720x1976), 1/2.7" Progressive CMOS • ONVIF S/G/T dome camera with integrated IR LEDs (up to 15 m) for day and night operation • Automatic changeover from color to B/W image (mechanical IR cut filter) • Fixed lens (F2.0: 2.8 mm), viewing angle H: 108.3°, V: - 76.5 °) • 3-axis lens adjustment • Indoor, IK8 • Ambient temperature -30 to 55°C, humidity 10 to 90% non-condensing • Video 450 9 13,5 cm 3,7 l	Mx-MD1A-5-IR	4047438042475	16,5 cm
Resolution: 5M (2720x1976), 1/2.7" Progressive CMOS • ONVIF S/G/T dome camera 3,7 l with integrated IR LEDs (up to 15 m) for day and night operation • Automatic 3,7 l changeover from color to B/W image (mechanical IR cut filter) • Fixed lens (F2.0: 2.8 mm), viewing angle H: 108.3°, V: - 76.5 °) • 3-axis lens adjustment • Indoor, IK8 • Ambient temperature -30 to 55°C, humidity 10 to 90% non-condensing • Video Video	MOBOTIX MOVE Indoor MicroDome Mx-MD-5-IR	85258900	16,5 cm
with integrated IR LEDs (up to 15 m) for day and night operation • Automatic 3,7 l changeover from color to B/W image (mechanical IR cut filter) • Fixed lens (F2.0: 2.8 mm), viewing angle H: 108.3°, V: - 76.5 °) • 3-axis lens adjustment • Indoor, IK8 • Ambient temperature -30 to 55°C, humidity 10 to 90% non-condensing • Video 3,7 l	0	450 9	13,5 cm
(120 dB) - Max, Frame rate: 5MP H.264, H.265 @ 30 fps; MJPEG: 1080p @ 30 fps -	with integrated IR LEDs (up to 15 m) for day and night operation • Automatic changeover from color to B/W image (mechanical IR cut filter) • Fixed lens (F2.0: 2.8 mm), viewing angle H: 108.3°, V: - 76.5 °) • 3-axis lens adjustment • Indoor, IK8 • Ambient temperature -30 to 55°C, humidity 10 to 90% non-condensing • Video codecs: H.264, H.265, MJPEG (up to 4 video-streams simultaneously) • True WDR		3,7 l

EAN / HS / weight

4047438045063

85258900

3.740 9

dimen.

32.3 cm

30,5 cm

15,6 cm

15,4 l

MOBOTIX MOVE Multi Sensor Cameras

Mx-VM1A-20-IR-VA

MOBOTIX MOVE Multi Sensor Cameras

Article No. / Name / Description



MOBOTIX MOVE Vandal Multisensor VM-20-IR-VA

MOBOTIX MOVE Vandal Multisensor Network Camera Mx-VM1A-20-IR-VA • Image sensor: 4x5MP (2608x1964), 1/2.8" Progressive CMOS IMX 675 SONY STARVIS II • Up to 3x optical zoom • ONVIF S/G/T/M •10 Integrated Video Analytic Function incl. DNN Face- and License-Plate Recognition • Auto Object Tracking • Multisensor camera with built-in IR LED illumination (up to 30 m) for use with day and night • Automatic changeover from color to B / W image (mechanical IR cut filter)+FIPS140-2 level 2compliant IT-Secure TPM chipset • NEMA-4x compliant •M.2 SATA 3 SSD support •2D & 3D Motion Compensated Noise Reduction (MCTF)• Motor-controlled Zoom lens (F1.6 x 4: 2,8mm to 8 mm, viewing angle HxV: 111,5° - 53,7° x 79° - 40,2°) with autofocus and P-Iris with automatic adaptation to changing light situations • IK10 / IP66 • Ambient temperature -40 to 60°C (22° to 122°F), humidity 10 to 90% •Video codecs: H.264, H.265, MJPEG (up to 9 Video-Streams simultaneously - 4x2 per sensor module + 1 quadview stream) • Wide Dynamic Range (130 dB)• Max. Frame rate: 5MP@30 fps (H.264, with and without WDR enabled); MJPEG: 1080p @ 30 fps• Power supply: PoE++ IEEE802.3bt, max. 51 W, AC24V max. 53,10 W / 74,80 VA •Opt. Integrated Microphone & Loudspeaker (bi-directional communication) •Hardened and "self-cleaning" anti-reflex camera front glass coating by MOBOTIX EverClear • MTBF: 95000h • Warranty: 5 years



Mx-VMSD1A-2021-VA 4047438047524 34,0 cm MOBOTIX MOVE Vandal Multisensor PTZ Combo VMSD-2021-85258900 28,7 cm MOBOTIX MOVE Vandal Multisensor PTZ Combo Network Camera Mx-VMSD1A-2021-4.950 g 34,5 cm VA • Image sensor Multi: 4x5MP (2560x1920), 1/2.7" Progressive CMOS • Image sensor 33,7 l PTZ: 2MP (1920x1080), 1/2.8" Progressive CMOS • ONVIF S/G/T/M • Pre-Installed Al-VMD DNN based Video-Motion Detection • Auto Object Tracking by PTZ-Unit • Automatic changeover from color to B / W image (mechanical IR cut filter) • FIPS140 -2 level 3 certified IT-Security TPM chipset • Intelligent Encoding, "Smart Low Bitrate Control" • Multisensor: 4x Fixed Focal Lens 3.2mm (viewing angle HxV: 97 °x 71 ° • PTZ: 21x Motorized Zoom /Focus Lens 4.0 - 84.6mm with Autofokus & P-Iris (Viewing angle HxV: 3.7 ° - 77 ° x 2.2 ° -44 °) • IK10 / IP66/ IP67 •NNDAA conformant • NEMA-4x conformant • Ambient temperature -40 to 55°C (-4° to 131°F), humidity 10 to 100% • Video codecs: H.264, H.265, MJPEG • Wide Dynamic Range up to 108 dB for Multisensor / 144 dB for PTZ-Unit • 1 Micro SD/SDHC/SDXC Card support up to 512 GB on each Multisensor/ PTZ • Max. Frame rate Multisensor: 5MP@15 fps H.264, MJPEG: 1080p @ 15 fps, max. Frame rate PTZ: 2MP@60 fps H.264, MJPEG: 1080p @ 60 fps • Power supply: PoE++ IEEE802.3bt, DC 54 V max. 35.6 W • Audio Line In/Out •

MTBF: 95000h • Warranty: 5 years

Optics

Beyond Human Vision



-63-

All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX • 24.01.2025 • MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025

Sensor Modules 4K for MOBOTIX 7



Article No. / Name / Description	EAN / HS / weight	dimen.	
Mx-O-M7SA-12DN016	4047438040631	9,8 cm	
12MP Hemispheric Day & Night Sensor Module	85299096	7,5 cm	
12MP Hemispheric M73/S74 with IR cut filter for day and night use, max. resolution: 4K UHD 2880x2880, IP66, white	107 g	9,0 cm	
		0,7 l	



Mx-O-M7SA-12DN016-b	4047438041379	9,8 cm
12MP Hemispheric Day & Night Sensor Module black	85299096	7,5 cm
12MP Hemispheric M73/S74 with IR cut filter for day and night use, max. resolution: 4K UHD 2880x2880, IP66, black	107 9	9,0 cm 0,7 l



Mx-O-M7SA-8D500	4047438047265	9,8 cm
8° 4K Day Sensor mod. TELE	85299096	7,5 cm
M73/S74 sensor module with premium tele lens for day use, aperture: f/1.8, max. image angle (HxV): 8°x4,5°, max. resolution: 4K UHD (3840x2160), IP66, white	210 9	9,0 cm 0,7 l



Mx-O-M7SA-8DN040-b	4047438041386	9,8 cm
120° 4K IR Cut Day & Night Sensor Module WIDE black	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 120°x60°, max. resolution: 4K UHD (3840x2160), IP66, black	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8DN050-b	4047438041393	9,8 cm
95° 4K IR Cut Day & Night Sensor Module WIDE black	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 95°x50°, max. resolution: 4K UHD (3840x2160), IP66, black	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8DN080-b	4047438041409	9,8 cm
60° 4K IR Cut Day & Night Sensor Module WIDE black	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 60°x33°, max. resolution: 4K UHD (3840x2160), IP66, black	140 g	9,0 cm 0,7 l



Mx-O-M7SA-8DN100-b	4047438041416	9,8 cm
45° 4K IR Cut Day & Night Sensor Module STANDARD black	85299096	7,5 cm
M73/S74 sensor module with premium normal lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 45°x25°, max. resolution: 4K UHD (3840x2160), IP66, black	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8DN150-b	4047438041423	9,8 cm
30° 4K IR Cut Day & Night Sensor Module TELE black	85299096	7,5 cm
M73/S74 sensor module with premium tele lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 30°x17°, max. resolution: 4K UHD (3840x2160), IP66, black	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8DN280-b	4047438041430	9,8 cm
15° 4K IR Cut Day & Night Sensor Module TELE black	85299096	7,5 cm
M73/S74 sensor module with premium tele lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 15°x8,5°, max. resolution: 4K UHD (3840x2160), IP66, black	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8L040	4047438040310	9,8 cm
120° 4K LPF Sensor Module WIDE	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens, LPF special lens, e.g., for license plate detection (with infrared), aperture: f/1.8, max. image angle (HxV): 120° x60°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8L500	4047438044080	9,8 cm
8° 4K LPF Sensor mod. TELE	85299096	7,5 cm
M73/S74 sensor module with premium tele lens, LPF special lens, e.g., for license plate detection (with infrared), aperture: f/1.8, max. image angle (HxV): 8°x4,5°, max. resolution: 4K UHD (3840x2160), IP66, white	210 9	9,0 cm 0,7 l



Mx-O-M7SA-8N040-b	4047438041447	9,8 cm
120° 4K Night Sensor Module WIDE black	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens and for night use, aperture: f/1.8, max. image angle (HxV): 120°x60°, max. resolution: 4K UHD (3840x2160), IP66, black	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8N050-b	4047438041454	9,8 cm
95° 4K Night Sensor Module WIDE black	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens for night use, aperture: f/1.8, max. image angle (HxV): 95°x50°, max. resolution: 4K UHD (3840x2160), IP66, black	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8N080-b	4047438041461	9,8 cm
60° 4K Night Sensor Module WIDE black	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens for night use, aperture: f/1.8, max. image angle (HxV): 95°x50°, max. resolution: 4K UHD (3840x2160), IP66, black	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8N100-b	4047438041478	9,8 cm
45° 4K Night Sensor Module STANDARD black	85299096	7,5 cm
M73/S74 sensor module with premium standard-angle lens for night use, aperture: f/1.8, max. image angle (HxV); 45°x25°, max. resolution: 4K UHD (3840x2160), IP66,	140 9	9,0 cm
black		0,7 l



Mx-O-M7SA-8N150-b	4047438041485	9,8 cm
30° 4K Night Sensor Module TELE black	85299096	7,5 cm
M73/S74 sensor module with premium tele lens for night use, aperture: f/1.8, max. image angle (HxV): 30°x17°, max. resolution: 4K UHD (3840x2160), IP66, black	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8N280-b	4047438041492	9,8 cm
15° 4K Night Sensor Module TELE black	85299096	7,5 cm
M73/S74 sensor module with premium tele lens for night use, aperture: f/1.8, max. image angle (HxV): 15°x8,5°, max. resolution: 4K UHD (3840x2160), IP66, black	140 9	9,0 cm 0,7 l

M
8°
M73
ima

Mx-O-M7SA-8N500	4047438047272	9,8 cm	
8° 4K Night Sensor mod. TELE	85299096	7,5 cm	
V73/S74 sensor module with premium tele lens for night use, aperture: f/1.8, max. mage angle (HxV): 8°x4,5°, max. resolution: 4K UHD (3840x2160), IP66, white	210 9	9,0 cm 0,7 l	



Mx-O-M7SA-8DN040	4047438034968	9,8 cm
120° 4K IR Cut Day & Night Sensor Module WIDE	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 120°x60°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8DN050	4047438034814	9,8 cm
95° 4K IR Cut Day & Night Sensor Module WIDE	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 95°x50°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8DN080	4047438035941	9,8 cm
60° 4K IR Cut Day & Night Sensor Module WIDE	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 60°x33°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l



	Mx-O-M7SA-8DN100	4047438034821	9,8 cm
	45° 4K IR Cut Day & Night Sensor Module STANDARD	85299096	7,5 cm
)	M73/S74 sensor module with premium normal lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 45°x25°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8DN150	4047438035958	9,8 cm
30° 4K IR Cut Day & Night Sensor Module TELE	85299096	7,5 cm
M73/S74 sensor module with premium tele lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 30°x17°, max. resolution: 4K UHD (3840x2160), IP66, white	<u>140</u> 9	9,0 cm 0,7 l



Mx-O-M7SA-8DN280	4047438034838	9,8 cm
15° 4K IR Cut Day & Night Sensor Module TELE	85299096	7,5 cm
M73/S74 sensor module with premium tele lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 15°x8,5°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8D040	4047438034944	9,8 cm
120° 4K Day Sensor Module WIDE	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens for day use, aperture: f/1.8, max. image angle (HxV): 120°x60°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8D050	4047438034845	9,8 cm
95° 4K Day Sensor Module WIDE	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens for day use, aperture: f/1.8, max. image angle (HxV): 95°x50°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8D080	4047438035989	9,8 cm
60° 4K Day Sensor Module WIDE	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens for day use, aperture: f/1.8,	140 9	9,0 cm
max. image angle (HxV): 60°x33°, max. resolution: 4K UHD (3840x2160), IP66, white		0,7 l



Mx-O-M7SA-8D100	4047438034852	9,8 cm
45° 4K Day Sensor Module STANDARD	85299096	7,5 cm
M73/S74 sensor module with premium standard-angle lens for day, aperture: f/1.8,	140 9	9,0 cm
max. image angle (HxV): 45°x25°, max. resolution: 4K UHD (3840x2160), IP66, white		0,7 l



Mx-O-M7SA-8D150	4047438035996	9,8 cm
30° 4K Day Sensor Module TELE	85299096	7,5 cm
M73/S74 sensor module with premium tele lens for day use, aperture: f/1.8, max. image angle (HxV): 30°x17°, max. resolution: 4K UHD (3840x2160), IP66, white	140 g	9,0 cm 0,7 l

Mx-
15°
M73/ angle

Mx-O-M7SA-8D280	4047438034869	9,8 cm	
15° 4K Day Sensor Module TELE	85299096	7,5 cm	
M73/S74 sensor module with premium tele lens for day, aperture: f/1.8, max. image angle (HxV): 15°x8,5°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l	



Mx-O-M7SA-8N040	4047438034951	9,8 cm
120° 4K Night Sensor Module WIDE	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens and for night use, aperture: f/1.8, max. image angle (HxV): 120°x60°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8N050	4047438034876	9,8 cm
95° 4K Night Sensor Module WIDE	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens for night use, aperture: f/1.8, max. image angle (HxV): 95°x50°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8N080	4047438035965	9,8 cm
60° 4K Night Sensor Module WIDE	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens for night use, aperture: f/1.8,	140 g	9,0 cm
max. image angle (HxV): 95°x50°, max. resolution: 4K UHD (3840x2160), IP66, white		0,7 l



Mx-O-M7SA-8N100	4047438034883	9,8 cm
45° 4K Night Sensor Module STANDARD	85299096	7,5 cm
M73/S74 sensor module with premium standard-angle lens for night use, aperture: f/1.8, max. image angle (HxV): 45°x25°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8N150	4047438035972	9,8 cm
30° 4K Night Sensor Module TELE	85299096	7,5 cm
M73/S74 sensor module with premium tele lens for night use, aperture: f/1.8, max. image angle (HxV): 30°x17°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l

	Mx-O-M7SA-8N280
	15° 4K Night Sensor Module TELE
	M73/S74 sensor module with premium tele lens for night use, aperture: f/1.8, image angle (HxV): 15°x8,5°, max. resolution: 4K UHD (3840x2160), IP66, white

	4047438034890	9,8 cm
	85299096	7,5 cm
erture: f/1.8, max.	140 9	9,0 cm
), IP66, white		0,7 l



Mx-O-M7SA-8L150	4047438037730	9,8 cm
30° 4K LPF Sensor Module TELE	85299096	7,5 cm
M73/S74 sensor module with premium tele lens, LPF special lens, e.g., for license plate detection (with infrared), aperture: f/1.8, max. image angle (HxV): 30°x17°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l



Mx-O-M7SA-8L280	4047438037723	9,8 cm
15° 4K LPF Sensor Module TELE	85299096	7,5 cm
M73/S74 sensor module with premium tele lens, LPF special lens, e.g., for license plate detection (with infrared), aperture: f/1.8, max. image angle (HxV): 15°x8,5°, max. resolution: 4K UHD (3840x2160), IP66, white	140 9	9,0 cm 0,7 l

Sensor Modules 4MP Low Light for MOBOTIX 7

A	rticle No. / Name / Description	EAN / HS / weight	dimen.
м	Ix-O-M7SA-4D045-f1.0	4047438044387	9,8 cm
10	09° f/1,0 4MP Day Sensor module	85299096	7,5 cm
	73/S74 sensor module with premium wide-angle lens for day use, aperture: f/1.0, ax. image angle (HxV): 109° x 55°, max. resolution: 4MP (2688x1512), IP66, white	160 9	9,0 cm 0,7 l



Mx-O-M7SA-4D050-f1.0	4047438044370	9,8 cm
94° f/1,0 4MP Day Sensor module	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens for day use, aperture: f/1.0, max. image angle (HxV): 94°x49,5°, max. resolution: 4MP (2688x1512), IP66, white	160 9	9,0 cm 0,7 l



Mx-O-M7SA-4D080-f1.0	4047438044363	9,8 cm
57° f/1,0 4MP Day Sensor module	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens for day use, aperture: f/1.0, max. image angle (HxV): 57°x32°, max. resolution: 4MP (2688x1512), IP66, white	160 9	9,0 cm 0,7 l



Mx-O-M7SA-4D115-f1.0	4047438044356	9,8 cm
37° f/1,0 4MP Day Sensor module	85299096	7,5 cm
M73/S74 sensor module with premium normal lens for day use, aperture: f/1.0, max. mage angle (HxV): 37,5°x22°, max. resolution: 4MP (2688x1512), IP66, white	160 g	9,0 cm 0,7 l



Mx-O-M7SA-4DN040	4047438037167	9,8 cm
120° 4MP IR Cut Day & Night Ultra LowLight Sensor Module	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 120° x 60°, max. resolution: 4MP (2688x1512), IP66, white	140 9	9,0 cm 0,7 l

мо	BO	IIX

.0	Ċ		0)
		J		P

	Mx-O-M7SA-4DN050	4047438037174	9,8 cm
	95° 4MP IR Cut Day & Night Ultra LowLight Sensor Module	85299096	7,5 cm
)	M73/S74 sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 95°x50°, max. resolution: 4MP (2688x1512), IP66, white	140 g	9,0 cm 0,7 l



Mx-O-M7SA-4DN080	4047438037181	9,8 cm
60° 4MP IR Cut Day & Night Ultra LowLight Sensor Module	85299096	7,5 cm
M73/S74 sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 60°x33°, max. resolution: 4MP (2688x1512), IP66, white	140 9	9,0 cm 0,7 l



Mx-O-M7SA-4DN100	4047438037198	9,8 cm
45° 4MP IR Cut Day & Night Ultra LowLight Sensor Module	85299096	7,5 cm
M73/S74 sensor module with premium normal lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 45°x25°, max. resolution: 4MP (2688x1512), IP66, white	140 9	9,0 cm 0.7 l



Mx-O-M7SA-4DN150	4047438037204	9,8 cm
30° 4MP IR Cut Day & Night Ultra LowLight Sensor Module	85299096	7,5 cm
M73/S74 sensor module with premium tele lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 30°x17°, max. resolution: 4MP (2688x1512), IP66, white	140 9	9,0 cm 0,7 l



Mx-O-M7SA-4DN280	4047438037211	9,8 cm
15° 4MP IR Cut Day & Night Low Light Sensor Module TELE	85299096	7,5 cm
M73/S74 sensor module with premium tele lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 15°x8,5°, max. resolution: 4MP (2688x1512), IP66, white	140 g	9,0 cm 0,7 l

Sensor Modules 6MP For S16A/S16B And

	Article No. / Name / Description	EAN / HS / weight	dimen.
	Mx-O-SMA-S-6D016	4047438029100	9,8 cm
	Sensor Module 6MP, B016 (Day), White	85299096	7,5 cm
	Sensor module S16/M16 with HD premium fisheye lens B016 (f/2.0, horiz. image	144 9	9,0 cm
	angle 180°) and Moonlight sensor day, 6MP (3072 x 2048), IP66, white		0,7 l
17			



6MP Sensor

Mx-O-SMA-S-6D036	4047438029117	9,8 cm
Sensor Module 6MP, B036 (Day), White	85299096	7,5 cm
Sensor module S16/M16 with HD premium lens B036 (f/1.8, horiz. image angle 103°) and Moonlight sensor day, 6MP (3072 x 2048), IP66, white	144 9	9,0 cm 0,7 l



Mx-O-SMA-S-6D041	4047438029124	9,8 cm
Sensor Module 6MP, B041 (Day), White	85299096	7,5 cm
Sensor module S16/M16 with HD premium lens B041 (f/1.8, horiz. image angle 90°) and Moonlight sensor day, 6MP (3072 x 2048), IP66, white	144 9	9,0 cm 0,7 l



Mx-O-SMA-S-6D079	4047438029148	9,8 cm
Sensor Module 6MP, B079 (Day), White	85299096	7,5 cm
Sensor module S16/M16 with HD premium lens B079 (f/1.8, horiz. image angle 45°) and Moonlight sensor day, 6MP (3072 x 2048), IP66, white	144 9	9,0 cm 0,7 l



Mx-O-SMA-S-6D237	4047438029162	9,8 cm
Sensor Module 6MP, B237 (Day), White	85299096	7,5 cm
Sensor module S16/M16 with HD premium lens B237 (f/1.8, horiz. image angle 15°) and Moonlight sensor day, 6MP (3072 x 2048), IP66, white	<u>1</u> 44 9	9,0 cm 0,7 l

6MP	Mx-O-SM
Sensor	Sensor M
	Sensor mode and Moonlig

x-O-SMA-S-6D500	4047438029179	9,8 cm
nsor Module 6MP, B500 (Day), White	85299096	7,5 cm
nsor module S16/M16 with HD premium lens B500 (f/2.5, horiz. image angle 8°) d Moonlight sensor day, 6MP (3072 x 2048), IP66, white	144 9	9,0 cm 0,7 l



Mx-O-SMA-S-6N016		4047438029186	9,8 cm
Sensor Module 6MP, B01	6 (Night), White	85299096	7,5 cm
	remium fisheye lens B016 (f/2.0, horiz. image ight, 6MP (3072 x 2048), IP66, white	144 9	9,0 cm 0,7 l



Mx-O-SMA-S-6N036	4047438029193	9,8 cm
Sensor Module 6MP, B036 (Night), White	85299096	7,5 cm
Sensor module S16/M16 with HD premium lens B036 (f/1.8, horiz. image angle 103°) and Moonlight sensor night, 6MP (3072 x 2048), IP66, white	170 9	9,0 cm 0,7 l



Mx-O-SMA-S-6N041	4047438029209	9,8 cm
Sensor Module 6MP, B041 (Night), White	85299096	7,5 cm
Sensor module S16/M16 with HD premium lens B041 (f/1.8, horiz. image angle 90°) and Moonlight sensor night, 6MP (3072 x 2048), IP66, white	144 9	9,0 cm 0,7 l



Mx-O-SMA-S-6N079	4047438029223	9,8 cm
Sensor Module 6MP, B079 (Night), White	85299096	7,5 cm
Sensor module S16/M16 with HD premium lens B079 (f/1.8, horiz. image angle 45°) and Moonlight sensor night, 6MP (3072 x 2048), IP66, white	144 9	9,0 cm 0,7 l



Mx-O-SMA-S-6N237	4047438029247	9,8 cm
Sensor Module 6MP, B237 (Night), White	85299096	7,5 cm
Sensor module S16/M16 with HD premium lens B237 (f/1.8, horiz. image angle 15°) and Moonlight sensor night, 6MP (3072 x 2048), IP66, white	144 9	9,0 cm 0,7 l

	Mx-O-SMA-S-6N500	4047438029254	9,8 cm
Sensor	Sensor Module 6MP, B500 (Night), White	85299096	7,5 cm
	Sensor module S16/M16 with HD premium lens B500 (f/2.5, horiz. image angle 8°) and Moonlight sensor night, 6MP (3072 x 2048), IP66, white	144 9	9,0 cm 0,7 l



Mx-O-SMA-S-6L237	4047438029322	9,8 cm
Sensor Module 6MP, B237 (Night LPF), White	85299096	7,5 cm
Sensor module S16/M16 with HD premium lens B237 (f/1.8, horiz. image angle 15°) and Moonlight sensor night, 6MP (3072 x 2048), LPF special lens, e.g., for license plate detection (with infrared), IP66, white	144 9	9,0 cm 0,7 l



Mx-O-SMA-S-6L500	4047438029339	9,8 cm
Sensor Module 6MP, B500 (Night LPF), White	85299096	7,5 cm
Sensor module S16/M16 with HD premium lens B500 (f/2.5, horiz. image angle 8°) and Moonlight sensor night, 6MP (3072 x 2048), LPF special lens, e.g., for license plate detection (with infrared), IP66, white	144 9	9,0 cm 0,7 l



Mx-O-SMA-S-6D016-b	4047438029346	9,8 cm
Sensor Module 6MP, B016 (Day), Black	85299096	7,5 cm
Sensor module S16/M16 with HD premium lens B016 (f/2.0, horiz. image angle 180°) and Moonlight sensor day, 6MP (3072 x 2048), IP66, black	144 9	9,0 cm 0,7 l



Mx-O-SMA-S-6D041-b	4047438029360	9,8 cm
Sensor Module 6MP, B041 (Day), Black	85299096	7,5 cm
Sensor module S16/M16 with HD premium lens B041 (f/1.8, horiz. image angle 90°) and Moonlight sensor day, 6MP (3072 x 2048), IP66, black	144 9	9,0 cm 0,7 l



Mx-O-SMA-S-6N016-b	4047438029421	9,8 cm
Sensor Module 6MP, B016 (Night), Black	85299096	7,5 cm
Sensor module S16/M16 with HD premium lens B016 (f/2.0, horiz. image angle 180°) and Moonlight sensor night, 6MP (3072 x 2048), IP66, black	144 9	9,0 cm 0,7 l



Mx-O-SMA-S-6N041-b	4047438029445	9,8 cm
Sensor Module 6MP, B041 (Night), Black	85299096	7,5 cm
Sensor module S16/M16 with HD premium lens B041 (f/1.8, horiz. image angle 90°) and Moonlight sensor night, 6MP (3072 x 2048), IP66, black	144 9	9,0 cm 0,7 l

BlockFlexMounts 12MP for S7x

	Article No. / Name / Description	EAN / HS / weight	dimen.
	MX-O-M7SA-B-12DN016	4047438047715	10,0 cm
	BlockFlexMount 12MP IR Cut Day & Night Sensor Module,	85299096	7,5 cm
	Suitable for: S74 • 12MP Sensor module with premium hemispheric lens and IR cut filter for day and night use, max, resolution: 4K UHD (2880x2880) • Operating	120 g	9,0 cm
9	conditions: IP30, 0 to 50°C (32 to 122°F) • Integrated status LEDs • Camera connection via MOBOTIX sensor cable (to be ordered individually)	n	0,7 l

BlockFlexMounts 4K for S7x



Article No. / Name / Description	EAN / HS / weight	dimen.
MX-O-M7SA-B-8DN040	4047438047722	10,0 cm
BlockFlexMount 4K IR Cut Day & Night Sensor Module, incl.	85299096	7,5 cm
Suitable for: S74 • Sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 120°x60°, max. resolution: 4K UHD (3840x2160) • Operating conditions: IP30, 0 to 50°C (32 to 122°F) • Integrated status LEDs • Camera connection via MOBOTIX sensor cable (to be ordered individually)		9,0 cm 0,7 l



MX-O-M7SA-B-8DN050	4047438047739	10,0 cm
BlockFlexMount 4K IR Cut Day & Night Sensor Module, incl.	85299096	7,5 cm
Suitable for: S74 • Sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 95°x50°, max. resolution: 4K UHD (3840x2160) • Operating conditions: IP30, 0 to 50°C (32 to 122°F) • Integrated status LEDs • Camera connection via MOBOTIX sensor cable (to be ordered individually)	125 9	9,0 cm 0,7 l



1017138017716	10.0 cm
85299096	7.5 cm
125 9	9,0 cm 0,7 l
	00200000



1	MX-O-M7SA-B-8DN100	4047438047753	10,0 cm
	BlockFlexMount 4K IR Cut Day & Night Sensor Module, incl.	85299096	7,5 cm
	Suitable for: S74 • Sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 45°x25°, max. resolution: 4K UHD (3840x2160) • Operating conditions: IP30, 0 to 50°C (32 to 122°F) • Integrated status LEDs • Camera connection via MOBOTIX sensor cable (to be ordered individually)	125 9	9,0 cm 0,7 l



MX-O-M7SA-B-8DN150	4047438047760	10,0 cm
BlockFlexMount 4K IR Cut Day & Night Sensor Module, incl.	85299096	7,5 cm
Suitable for: S74 • Sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 30°x17°, max. resolution: 4K UHD (3840x2160) • Operating conditions: IP30, 0 to 50°C (32 to 122°F) • Integrated status LEDs • Camera connection via MOBOTIX sensor cable (to be ordered individually)	125 9	9,0 cm 0,7 l

|--|

MX-O-M7SA-B-8DN280	4047438047777	10,0 cm	
BlockFlexMount 4K IR Cut Day & Night Sensor Module, incl.	85299096	7,5 cm	
Suitable for: S74 • Sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 15*x8.5°, max. resolution: 4K UHD (3840x2160) • Operating conditions: IP30, 0 to 50°C (32 to 122°F) • Integrated status LEDs • Camera connection via MOBOTIX sensor cable (to be ordered individually)	125 9	9,0 cm 0,7 l	

MX-O-M7SA-B-8DN500	4047438047784	10,0 cm
BlockFlexMount 4K IR Cut Day & Night Sensor Module, incl.	85299096	7,5 cm
Suitable for: S74 • Sensor module with premium wide-angle lens and IR cut filter for day and night use, aperture: f/1.8, max. image angle (HxV): 8°x4.5°, max. resolution: 4K UHD (3840x2160) • Operating conditions: IP30, 0 to 50°C (32 to 122°F) • Integrated status LEDs • Camera connection via MOBOTIX sensor cable (to be ordered individually)	180 9	9,0 cm 0,7 l

Sensor Modules 6MP For D16A/D16B

6 MP Sensor

Article No. / Name / Description	EAN / HS / weight	dimen.	
Mx-O-SDA-F-6D6N	4047438030182	19,6 cm	
Sensor Bridge FIX For D16, 2x 6MP (Day & Night)	85299096	18,0 cm	
Day & Night sensor bridge for D16 Body, including two parallel aligned 6MP sensors (1x Day, 1x Night) and a XL cover (MX-D15-DCT-XL) • Lenses not included (two lenses B036 to B237 possible, to be ordered separately)	346 g	14,8 cm 5,2 l	



Mx-O-SDA-P-6D6D	4047438030199	19,6 cm
Sensor Bridge PAN/180° For D16, 2x 6MP (Day)	85299096	18,0 cm
Panorama/180° sensor bridge for D16 Body, including two day sensors 6MP and a XL cover (MX-D15-DCT-XL) • Lenses not included (two lenses B041 needed for 180° panoramic image, to be ordered separately)	346 9	14,8 cm 5,2 l



Mx-O-SDA-P-6N6N	4047438030205	19,6 cm
Sensor Bridge PAN-N/180° for D16, 2x 6MP (Night)	85299096	18,0 cm
Panorama/180° sensor bridge for D16 Body, including two night sensors 6MP and a XL cover (MX-D15-DCT-XL) • Lenses not included (two lenses B041 needed for 180° panoramic image, to be ordered separately)	344 g	14,8 cm 5,2 l



Mx-O-SDA-S-6D036	4047438029582	9,0 cm
Sensor Module D16 6MP, Incl. B036 (Day)	85299096	7,5 cm
Sensor module D16 with HD premium lens B036 (f/1.8, horiz. image angle 103°) and Moonlight sensor day, 6MP (3072 x 2048)	68 9	5,0 cm 0,3 l



Mx-O-SDA-S-6D041	4047438029599	9,0 cm
Sensor Module D16 6MP, Incl. B041 (Day)	85299096	7,5 cm
Sensor module D16 with HD premium lens B041 (f/1.8, horiz. image angle 90°) and Moonlight sensor day, 6MP (3072 x 2048)	66 g	5,0 cm 0,3 l



1x-O-SDA-S-6D079	4047438029612	9,0 cm	
ensor Module D16 6MP, Incl. B079 (Day)	85299096	7,5 cm	
ensor module D16 with HD premium lens B079 (f/1.8, horiz. image angle 45°) and oonlight sensor day. 6MP (3072 x 2048)	68 9	5,0 cm	
		0,3 l	



Mx-O-SDA-S-6N036	4047438029643	9,0 cm
Sensor Module D16 6MP, Incl. B036 (Night)	85299096	7,5 cm
Sensor module D16 with HD premium lens B036 (f/1.8, horiz. image angle 103°) and Moonlight sensor day, 6MP (3072 x 2048)	68 9	5,0 cm 0,3 l



Mx-O-SDA-S-6N041	4047438029650	9,0 cm
Sensor Module D16 6MP, Incl. B041 (Night)	85299096	7,5 cm
Sensor module D16 with HD premium lens B041 (f/1.8, horiz. image angle 90°) and Moonlight sensor night, 6MP (3072 x 2048)	66 9	5,0 cm 0,3 l



Mx-O-SDA-S-6N079	4047438029674	9,0 cm
Sensor Module D16 6MP, Incl. B079 (Night)	85299096	7,5 cm
Sensor module D16 with HD premium lens B079 (f/1.8, horiz. image angle 45°) and Moonlight sensor night, 6MP (3072 x 2048)	68 9	5,0 cm
		0,3 l

мовотіх

Camera Accessories

Beyond Human Vision



All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX • 24.01.2025 • MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025

Camera Mounts (M7)

	Article No. / Name / Description	EAN / HS / weight	dimen.
	Мх-М-СМ-М73	4047438039819	19,6 cm
	Ceiling Mount for M73 models	90079100	18,0 cm
• • •	Suitable for: M73 cameras • Die-Casting, white incl. Mounting parts	631 g	14,8 cm
			5,2 l



Mx-M-IC-DQ	4047438040761	39,5 cm
In-Ceiling Set for MOBOTIX 7 Single Lens Models	90079100	29,6 cm
In-Ceiling Set for MOBOTIX 7 Single Lens Models	665 9	9,0 cm
		10,5 l
	In-Ceiling Set for MOBOTIX 7 Single Lens Models	In-Ceiling Set for MOBOTIX 7 Single Lens Models 90079100



	Mx-M-OW-DQ	4047438040662	29,6 cm	
	On-Wall Set for MOBOTIX 7 Single Lens Models	90079100	19,6 cm	
20	On-Wall Set for MOBOTIX 7 Single Lens Models	410 9	9,0 cm	
>			5,2 l	



Mx-M-OW-DQ-10DEG	4047438043373	29,6 cm
On-Wall Set 10° for MOBOTIX 7 Single Lens Models	90079100	19,6 cm
On-Wall Set 10° inclined for MOBOTIX 7 Single Lens Models	500 9	9,0 cm
		5,2 l



Mx-M-OW-M73	4047438039802	19,6 cm
On-Wall Mount for M73 models	90079100	18,0 cm
Suitable for: M73 cameras • Die-Casting, white incl. Mounting parts	502 9	14,8 cm
		5,2 l

ΜΟΒΟΤΙΧ

10	Mx-M-P
	Pole m
	Suitable fo

Мх-М-РМ-М73	4047438035064	20,0 cm	
Pole mount for M73 models	90079100	18,2 cm	
Suitable for: M73 Cameras • 2 mm stainless steel, white • Incl. mounting parts and 2 stainless steel straps for pole diameters of 60 to 180 mm	1.247 9	9,0 cm 3,3 l	



Mx-M-WM-DQ	4047438040778	29.6 cm
Wall Mount for MOBOTIX 7 Single Lens Models	90079100	19,6 cm
Wall Mount for MOBOTIX 7 Single Lens Models	835 g	18,0 cm
		10,4 l



Mx-M-WPM-DQ	4047438041348	41,0 cm
Wall & Pole/Corner Mount Set For D7x/Q7x	90079100	31,0 cm
Suitable for: D7x and Q7x • Set consisting of pole/corner mount (MX-OPT-MH) and wall mount (Mx-M-WM-DQ) • Pole/corner mount for fastening of wall mount: 3 mm stainless steel, white • Wall mount consists of shock-resistant fiberglass-reinforced plastic (PBT), white • Covers RJ45 wall outlets • Ample room inside for extras (e.g., interface boxes) • Incl. mounting parts and 2 stainless steel straps for pole diameters of 60 to 180 mm	3.380 g	20,0 cm 25,4 l

Mounts For S74

-

	Article No. / Name / Description	EAN / HS / weight	dimen.
	Mx-M-DLMA	4047438036887	19,6 cm
	DualMount S7x, white	90079100	15,0 cm
00	For surveillance of one to two areas with two sensor modules • Suitable for all screwable sensor modules of the S7x (not included) • Concealed cabling, weatherproof from -30 to 60°C/-22 to 140°F • Suitable for ceiling installation, with a 25° tilt of the lenses • Color: white	450 9	9,0 cm 2,6 l



Mx-M-DLMA-b	4047438041553	19,6 cm
DualMount S7x, black	90079100	15,0 cm
For surveillance of one to two areas with two sensor modules • Suitable for all screwable sensor modules of the S7x (not included) • Concealed cabling, weatherproof from -30 to 60°C/-22 to 140°F • Suitable for ceiling installation, with a 25° tilt of the lenses • Color: black	450 9	9,0 cm 2,6 l



Мх-М-РТМА	4047438036894	19,6 cm
PTMount S7x, white	90079100	18,0 cm
Manually adjustable dome mount for one sensor module (not included) • Features three axes that allow it to compensate for sideway tilt and to re-align the image horizon horizontally when mounted to a wall • Suitable for all screwable sensor modules for S7x and S16B • Concealed cabling, weatherproof from -30 to 60°C/-22 to 140°F • Suitable for ceiling or wall installation • Color: white • Angled sensor cables are recommended (e.g. Mx-A-S7A-CBL01-AN)	620 9	14,8 cm 5,2 l



Mx-M-PTMA-b	4047438036900	19,6 cm
PTMount S7x, black	90079100	18,0 cm
Manually adjustable dome mount for one sensor module (not included) • Features three axes that allow it to compensate for sideway tilt and to re-align the image horizon horizontally when mounted to a wall • Suitable for all screwable sensor modules for S7x • Concealed cabling, weatherproof from -30 to 60°C/-22 to 140°F • Suitable for ceiling or wall installation • Color: black	620 9	14,8 cm 5,2 l



Mx-M-PTMA-OW	4047438039826	9,8 cm
On-Wall Kit for PTMount S7x, white	90079100	7,5 cm
On-Wall Kit for PTMount S7x, white incl. Mounting parts	75 9	9,0 cm 0,7 l

40	BO	TIV
νiυ	DU	

	4047438039833	9,8 cm
On-Wall Kit for PTMount S7x, black	90079100	7,5 cm
On-Wall Kit for PTMount S7x, black incl. Mounting parts	75 9	9,0 cm
		0,7 l



Mx-M-SLMA	4047438036870	14,8 cm
SingleMount S7x, white	90079100	9,8 cm
For surveillance of one area with one sensor module • Suitable for all screwable sensor modules of the S7x and S16B (not included) • Concealed cabling, weatherproof from -30 to 60°C/-22 to 140°F • Suitable for ceiling installation, with a 25° tilt of the lenses • Color: white	240 g	9,0 cm 1,3 l



Mx-M-SLMA-b	4047438037921	14,8 cm
SingleMount S7x, black	90079100	9,8 cm
For surveillance of one area with one sensor module • Suitable for all screwable sensor modules of the S7x (not included) • Concealed cabling, weatherproof from -30 to 60°C/-22 to 140°F • Suitable for ceiling installation, with a 25° tilt of the lenses • Color: black	240 9	9,0 cm 1,3 l

S7x Sensor Cables

N S A S		
------------------	--	--

Article No. / Name / Description	EAN / HS / weight	dimen.	
Mx-A-S7A-AUCBL05-AN	4047438040501	14,0 cm	
S74 audio cable 5m	85444210	3,5 cm	
Audio cable to connect a MOBOTIX 7 audio module Mx-F-AUDA to the IO board Mx-F S7A-INT01 the S74, length 5m	155 9	15,0 cm 0,7 l	



Mx-A-S7A-CBL01	4047438035583	14,0 cm
Sensor Cable 1m for S7x straight-straight	85444210	3,5 cm
Sensor cable straight-straight, lenght 1 m/3,3 ft • For connecting optical sensor modules and thermal sensor modules to the S7x camera body	70 9	15,0 cm 0.7 l
		0,7 1



Mx-A-S7A-CBL01-AN	4047438035897	14,0 cm
Sensor cable 1m for S7x straight-angled	85444210	3,5 cm
Sensor cable straight-angled, lenght 1 m/3,3 ft • For connecting optical sensor modules and thermal sensor modules to the S7x camera body • recommended for PTMounts	70 9	15,0 cm 0,7 l



Mx-A-S7A-CBL02	4047438035590	14,0 cm
Sensor Cable 2m for S7x straight-straight	85444210	3,5 cm
Sensor cable straight-straight, lenght 2 m/6,6 ft • For connecting optical sensor modules and thermal sensor modules to the S7x camera body	90 9	15,0 cm 0.7 l



/x-A-S7A-CBL02-AN	4047438035903	14,0 cm
iensor cable 2m for S7x straight-angled	85444210	3,5 cm
ensor cable straight-angled, lenght 2 m/6,6 ft • For connecting optical sensor nodules and thermal sensor modules to the S7x camera body • recommended for TMounts	90 9	15,0 cm 0,7 l

|--|

Mx-A-S7A-CBL03	4047438035606	14,0 cm	
Sensor Cable 3m for S7x straight-straight4047438035606	85444210	3,5 cm	
Sensor cable straight-straight, lenght 3 m/9,9 ft • For connecting optical sensor modules and thermal sensor modules to the S7x camera body	110 9	15,0 cm 0,7 l	



Mx-A-S7A-CBL03-AN	4047438035910	14,0 cm
Sensor cable 3m for S7x straight-angled	85444210	3,5 cm
Sensor cable straight-angled, lenght 3 m/9,9 ft • For connecting optical sensor modules and thermal sensor modules to the S7x camera body • recommended for PTMounts	110 9	15,0 cm 0,7 l



Mx-CBL-MUC-AB-1	4047438037129	10,0 cm
S74 Cable MiniUSB-C to USB-A 1m	85444210	7,5 cm
MiniUSB-C straight > USB-A straight • Length 1 m /3,3 ft • For S74 • to connect ext. USB device (e.g. external harddrive)	102 9	9,0 cm 0,7 l



Mx-CBL-MUC-AB-5	4047438037136	14,8 cm
S74 Cable MiniUSB-C to USB-A 5m	85444210	9,8 cm
MiniUSB-C straight > USB-A straight • Length 5 m /16,4 ft • For S74 • to connect ext. USB device (e.g. external harddrive)	220 9	9,0 cm 1,3 l



Mx-CBL-MUC-AN-AB-1	4047438040556	10,0 cm
S7x Cable MiniUSB-C to USB-A angled-straight 1m	85444210	7,5 cm
MiniUSB-C angled > USB-A straight • Length 1 m /3,3 ft • For S7x • to connect ext. USB device (e.g. external harddrive)	102 9	9,0 cm 0,7 l



Mx-CBL-MUC-AN-AB-5	4047438040563	14,8 cm
S7x Cable MiniUSB-C to USB-A angled-straight 5m	85444210	9,8 cm
MiniUSB-C angled > USB-A straight • Length 5 m /16,4 ft • For S7x • to connect ext. USB device (e.g. external harddrive)	₂₂₀ g	9,0 cm 1,3 l

Λ.	0	B		Г١	v
IVI	υ	D١	J		л

	M S U
--	-------------

Mx-CBL-MUC-AN-MU-1	4047438040532	10,0 cm
S7x Cable MiniUSB-C to MiniUSB angled-straight 1m	85444210	7,5 cm
MiniUSB-C angled > MiniUSB straight • Length 1 m /3,3 ft • For S7x • to connect ext. USB device (e.g. external harddrive)	102 9	9,0 cm 0,7 l



Mx-CBL-MUC-AN-MU-5	4047438040549	14,8 cm
S7x Cable MiniUSB-C to MiniUSB angled-straight 5m	85444210	9,8 cm
MiniUSB-C angled > MiniUSB straight • Length 5 m /16,4 ft • For S7x • to connect ext. USB device (e.g. external harddrive)	220 9	9,0 cm 1,3 l



Mx-CBL-MUC-MU-5	4047438037150	14,8 cm
S74 Cable MiniUSB-C to MiniUSB 5m	85444210	9,8 cm
MiniUSB-C straight > MiniUSB straight • Length 5 m/16,4 ft • For S74 • To connect RS232-IO-Box (MX-OPT-RS1-EXT)	220 9	9,0 cm 1,3 l

Camera Mounts ONE

	Article No. / Name / Description	EAN / HS / weight	dimen.
	Mx-M-CM-M1	4047438048415	15,0 cm
~	Ceiling Mount for M1 ONE Cameras	90079100	9,5 cm
0	Suitable for: M1 ONE Cameras • Mounting set to convert the VarioFlex wall mount	160 g	9,0 cm
	into a ceiling mount • Incl. mount, M6x30 connection screw , washer, M6 nut and rubber seal • Turning/tilting (mechanically): 360° horizontally, -90° to +20° vertically • Suspended ceiling installation with additional MxTubeMount (MX-MT-TUBE)		1,3 l

HD Premium Lenses

Ultra Wide Lens B036, Focal Length: 3.6 mm 90021100 7,5 cm Ultra Wide lens B036 · HD premium quality · Focal length: 3.6 mm · Aperture: f/1.8 · 34 g 5,0 cm		Article No. / Name / Description	EAN / HS / weight	dimen.
Ultra Wide lens B036 • HD premium quality • Focal length: 3.6 mm • Aperture: f/1.8 • 34 g 5,0 cm		МХ-В036	4047438026536	9,0 cm
JT 5 J,0 CI		Ultra Wide Lens B036, Focal Length: 3.6 mm	90021100	7,5 cm
	-			5,0 cm
Image angle (horizontal x vertical, on camera with 6MP sensor): 103° x 77° (up to 5MP resolution) and 122° x 80° (6MP resolution) 0,3 L			,	0,3 l



MX-B041	4047438026543	9,0 cm
Super Wide Lens B041, Focal Length: 4.1 mm	90021100	7,5 cm
Super Wide lens B041 • HD premium quality • Focal length: 4.1 mm • Aperture: f/1.8 • Image angle (horizontal x vertical, on camera with 6MP sensor): 90° x 67° (up to 5MP resolution) and 110° x 70° (6MP resolution)	34 9	5,0 cm 0,3 l



МХ-В079	4047438026567	9,0 cm
Standard Lens B079, Focal Length: 7.9 mm	90021100	7,5 cm
Standard lens B079 • HD premium quality • Focal length: 7.9 mm • Aperture: f/1.8 • Image angle (horizontal x vertical, on camera with 6MP sensor): 45° x 34° (up to 5MP resolution) and 54° x 36° (6MP resolution)	34 9	5,0 cm 0,3 l



МХ-В237	4047438026581	9,0 cm
lens for D1x/M2x/D2x (HS code 90021900)	90021100	7,5 cm
Distant Tele lens B237 • HD premium quality • Focal length: 23.7 mm • Aperture: f/1.8 • Image angle (horizontal x vertical, on camera with 6MP sensor): 15° x 11° (up to 5MP resolution) and 17° x 11.5° (6MP resolution)	34 9	5,0 cm 0,3 l



MX-B500	4047438026598	9,0 cm
Super Tele Lens B500, Focal Length: 50 mm	90021100	7,5 cm
Super Tele lens B500 • HD premium quality • Focal length: 50 mm • Aperture: f/2.5 • Image angle (horizontal x vertical): 8° x 6° (up to 5MP resolution) and 9° x 6° (6MP resolution) • For mounting this lens on the M2x, the extended replacement lens cover is needed (MOBOTIX accessory: MX-M24M-OPT-LCGL)	52 g	5,0 cm 0,3 l

	M) Po
Q	Sui CSV Rec refl

MX-SM-OPT-POL	4047438019781	9,0 cm
Polarization Filter For Sensor Modules	90079100	7,5 cm
Suitable for all M1x/S1x sensor modules except with the lenses B016, B036, B500 and CSVario or CS Mount • Filter replaces the lens cover (made of glass) • Example: Recognition of people through the windshield of a car - the filter reduces the mirror reflection (and about 50 % of the sensor light sensitivity)	28 9	

Domes & Housings

	Article No. / Name / Description	EAN / HS / weight	dimen.	
	MX-M24M-OPT-LCSK	4047438012980	9,0 cm	
	Replacement Lens Cover M2x, Standard	90079100	7,5 cm	
Suitable for: M2x (not CSVario, Hemispheric or super tele lens B500) and S10	32 g	5,0 cm		
	sensor mdoule with super tele lens B500 • Weather lens protection made of plastic (IP66)		0,3 l	



MX-M24M-OPT-LCSG	4047438012997	9,0 cm
Replacement Lens Cover M2x, With Glass Pane	90079100	7,5 cm
Suitable for: M2x (not CSVario, Hemispheric or super tele lens B500) and S1x/M1x sensor mdoule with super tele lens B500 • Lens protection made of scratch-proof glass for extreme weather conditions (IP66)	38 9	5,0 cm 0,3 l



MX-M24M-OPT-LCGL	4047438013000	9,0 cm
Replacement Lens Cover M2x, Extended	90079100	7,5 cm
Suitable for: M2x and S1x/M1x sensor module with CSVario lens B045-100-CS or with super tele lens B500 • Lens protection made of scratch-proof glass for extre weather conditions (IP66)		5,0 cm 0,3 l



MX-OPT-DK-L11	4047438016469	9,0 cm
Replacement Cover Hemispheric	90079100	7,5 cm
Suitable for: Hemispheric sensor modules (for S1x/M1x), S26, S1xM, T2x and Q2x with Vanadlism Kit • Mounted with the blue MOBOTIX lens wrench (supplied with the Mx camera) • Polycarbonate (1.5 mm)	24 9	5,0 cm 0,3 l



MX-D15-OPT-DCT	4047438018227	19,6 cm
Replacement Cover D1x/v2x, Standard	90079100	14,8 cm
Suitable for: D1x and v2x • Not for Pano/180° and DNight-Fix models (XL cover needed)	54 9	9,0 cm 2,6 l

\bigcirc		
------------	--	--

MX-D15-OPT-DCS	4047438018210	19,6 cm	
Replacement Cover D1x/v2x, Tinted	90079100	14,8 cm	
Suitable for: D1x and v2x • Not for Pano/180° and DNight-Fix models (XL cover needed) • Tinted (50%) for especiallly bright environments	54 9	9,0 cm 2,6 l	



MX-D15-DCT-XL	4047438027519	19,6 cm
Replacement Cover D1x FIX/PAN, XL	90079100	18,0 cm
Suitable for: D1x PAN/180° and FIX/Day&Night models • Polycarbonate (1.5 mm)	281 9	14,8 cm
		5,2 l



MX-D15-DCS-XL	4047438027526	19,6 cm
Replacement Cover D1x PAN/FIX, XL Tinted	90079100	18,0 cm
Suitable for: D1x PAN/180° and FIX/Day&Night models • Tinted (50%) for especiallly bright environments • Polycarbonate (1.5 mm)	60 9	14,8 cm 5,2 l



MX-D24M-OPT-DCT	4047438011419	19,6 cm
Replacement Cover D2x, Standard	90079100	15,0 cm
Suitable for: D2x • With sealing ring	150 9	9,0 cm
		2,6 l



MX-D24M-OPT-DCS	4047438011402	19,6 cm
Replacement Cover D2x, Tinted	90079100	15,0 cm
Suitable for: D2x • With sealing ring • Tinted (50%) for especially bright environments	150 9	9,0 cm
		2,6 l

Mounts For S16A/S16B



Article No. / Name / Description	EAN / HS / weight	dimen.	
МХ-S14-ОРТ-МК-СѠ	4047438016384	10,0 cm	
Extension Set Sensor Module, 40 mm and 15° wedges	90079100	7,5 cm	
Complete set for wall or ceiling mounting of a sensor module using 15° wedge extension to increase the installation depth • Suitable for all S1x and S7x sens modules • 1x extension 40 mm/1.6 in • 2x 15° wedges (white and black) • 2x we sealing rings • 1x nut	or	9,0 cm 0,7 l	



MX-S14-OPT-MK-EX	4047438016391	9,8 cm
Extension Sensor Module, 40 mm	90079100	7,5 cm
1x extension 40 mm/1.6 inch, increases the installation depth • Suitable for all (screwable) S1x sensor modules • Can be mounted directly onto the sensor modules themselves or onto existing extensions	62 9	9,0 cm 0,7 l

Camera Mounts

 Article No. / Name / Description	EAN / HS / weight	dimen.
Mx-M-OWA-AU	4047438030328	19,6 cm
On-Wall Mounting Set With Audio For v26, White	90079100	18,0 cm
On-Wall Set with Audio for v26 • Consists of on-wall mount, mounting parts, integrated speaker, microphone and camera plug-in connection cable • Enables on- wall cabling of the camera and integrates two additional Interface Box modules • Housing color: white	510 g	14,8 cm 5,2 l



Mx-M-OWA-AU-b	4047438030335	19,6 cm
On-Wall Mounting Set With Audio For v26, Black	90079100	18,0 cm
On-Wall Set with Audio for v26 • Consists of on-wall mount, mounting parts, integrated speaker, microphone and camera plug-in connection cable • Enables on- wall cabling of the camera and integrates two additional Interface Box modules • Housing color: black	510 9	14,8 cm 5,2 l



MX-MT-OW2-AUD	4047438027632	19,6 cm
On-Wall Mounting Set With Audio For v25, White	90079100	18,0 cm
Suitable for: v25 • Consists of on-wall mount, mounting parts, integrated speaker, microphone and camera plug-in connection cable • Enables on-wall cabling of the camera and integrates two additional Interface Box modules • Housing color: white	500 9	14,8 cm 5,2 l



MX-MT-OW2-AUD-b	4047438027670	19.6 cm
		- ,
On-Wall Mounting Set With Audio For v25, Black	90079100	18,0 cm
Suitable for: v25 • Consists of on-wall mount, mounting parts, integrated speaker,	500 9	14,8 cm
microphone and camera plug-in connection cable • Enables on-wall cabling of the camera and integrates two additional Interface Box modules • Housing color: black		5,2 l
	microphone and camera plug-in connection cable • Enables on-wall cabling of the	On-Wall Mounting Set With Audio For v25, Black 90079100 Suitable for: v25 · Consists of on-wall mount, mounting parts, integrated speaker, microphone and camera plug-in connection cable · Enables on-wall cabling of the 500 g



MX-MT-TUBE	4047438027557	29,6 cm
MxTubeMount Ceiling Suspension System	90079100	19,6 cm
For suspended ceiling installation of the cameras M1x/M2x/v2x/PTMount/PT-Mount- Thermal (each can be attached directly to the MxTubeMount) and of the cameras D2x/Q2x/c2x/p2x (each can only be attached to the MxTubeMount when using the optional on-wall mounting set of the camera) • Incl. drop down protection wire (length: 2.2 m/7.2 ft) • Additionally needed suspension tube MxTube with a length of Im (3.3 ft) or 2 m (6.6 ft) to be ordered separately (MX-MT-TUBE100, MX-MT- TUBE200) • Alternative suspension with customary tubes: outer diameter 30 mm or 26.9 mm (R3/4" according to DIN 2440), max. length: 2 m (6.6 ft), max. weight: 2.5 kg (5.5 lb), color: white	870 9	9,0 cm 5,2 l

MX-MT
MxTub
Suspensic Outer dia

-

X-MT-TUBE100	4047438027687	106,0 cm	
xTube, 1 m	90079100	4,0 cm	
spension tube for MxTubeMount • Length: 1 m (3.3 ft) • Anodized aluminium • ter diameter: 30 mm, wall thickness: 2 mm	700 9	4,0 cm 1,7 l	



MX-MT-TUBE200	4047438027564	212,5 cm
MxTube, 2 m	90079100	4,0 cm
Suspension tube for MxTubeMount • Length: 2 m (6.6 ft) • Anodized aluminium • Outer diameter: 30 mm, wall thickness: 2 mm	1.390 9	4,0 cm 3,4 l



MX-OPT-AP	4047438011358	29,6 cm
On-Wall Mounting Set For Q2x/D2x/ExtIO	90079100	19,6 cm
Suitable for: Q2x, D2x, ExtlO • Consists of on-wall mount and mounting parts • Protects the cabling • Allows integrating additional modules • Dimensions: 165 mm x	612 9	9,0 cm
37 mm		5,2 l



MX-OPT-AP-10DEG	4047438010283	29,6 cm
On-Wall Mounting Set For Q2x/D2x/ExtIO, 10°	90079100	19,6 cm
Suitable for: Q2x, D2x, ExtlO • Consists of on-wall mount and mounting parts • Camera can be mounted at a 10° tilt angle • Protects the cabling • Allows integrating additional modules • Dimensions: 165 mm x 37 mm	552 9	9,0 cm 5,2 l



MX-D15-OPT-WHMH-Set	4047438018159	41,0 cm
Wall & Pole/Corner Mount Set For D1x	90079100	31,0 cm
Suitable for: D1x • Set consisting of pole/corner mount (MX-MH-Dome-ESWS) and wall mount (MX-WH-Dome) • Mounted to the corner, one camera can cover two sides of a building simultaneously • Pole/corner mount for fastening of wall mount: 3 mm stainless steel, white • Wall mount consists of shock-resistant fiberglass-reinforced plastic (PBT), white • Covers RJ45 wall outlets • Ample room inside for extras (e.g., interface boxes) • Wall mount raises camera protection class from IP54 to IP65 • Incl. mounting parts and 2 stainless steel straps for pole diameters of 60 to 180 mm	6.280 9	39,0 cm 49,6 l



MX-OPT-WHMH-Set	4047438011396	41,0 cm
Wall & Pole/Corner Mount Set For Q2x/D2x/ExtIO	90079100	31,0 cm
Suitable for: Q2x, D2x, ExtIO • Set consisting of pole/corner mount (MX-OPT-MH) and wall mount (MX-OPT-WH) • Pole/corner mount for fastening of wall mount: 3 mm stainless steel, white • Wall mount consists of shock-resistant fiberglass-reinforced plastic (PBT), white • Covers RJ45 wall outlets • Ample room inside for extras (e.g., interface boxes) • Incl. mounting parts and 2 stainless steel straps for pole diameters of 60 to 180 mm	3.380 9	20,0 cm 25,4 l



MX-WH-Dome	4047438002233	39,5 cm
Wall Mount For D1x	90079100	29,6 cm
Suitable for: D1x • Shock-resistant fiberglass-reinforced plastic (PBT), white • Covers RJ45 wall outlets • Ample room inside for extras (e.g., interface boxes) • Raises camera protection class from IP54 to IP66 • Incl. mounting parts	2.020 g	18,0 cm 21,0 l



МХ-ОРТ-WH	4047438011372	29,6 cm
Wall Mount For Q2x/D2x/ExtIO	90079100	19,6 cm
Suitable for: Q2x, D2x, ExtlO • Wall mount consists of shock-resistant fiberglass- reinforced plastic (PBT), white • Covers RJ45 wall outlets • Ample room inside for extras (e.g., interface boxes) • Incl. mounting parts	886 9	18,0 cm 10,4 l



MX-MH-Dome-ESWS	4047438002240	34,0 cm
Pole/Corner Mount For MX-WH-Dome	90079100	18,5 cm
Suitable for: D1x • Pole/corner mount for fastening of wall mount MX-WH-Dome (to be ordered individually) • Made of 3 mm stainless steel, white • Incl. mounting parts	3.000 g	11,5 cm
and 2 stainless steel straps for pole diameters of 60 to 180 mm		7,2 l



MX-MH-SecureFlex-ESWS	4047438002226	20,0 cm
Pole Mount For M1x/M2x	90079100	15,2 cm
Suitable for: M1x, M2x • Mount for fastening the standard camera wall mount SecureFlex (M12/M10, M22) and VarioFlex (M15, M2x) • Made of 3 mm stainless steel, white • Incl. mounting parts and 2 stainless steel straps for pole diameters of 60 to 180 mm	1.230 g	8,0 cm 2,4 l



МХ-ОРТ-МН Po

Pole/Corner Mount For MX-OPT-WH	90079100	20,0 cm
uitable for: D7x, Q7x, Q2x, D2x, ExtIO • Mount for fastening the wall mount Mx-M- /M-DQ and MX-OPT-WH (to be ordered separately) • A set consisting of Pole/Corner lount and Wall Mount is also available (MX-OPT-WHMH-Set) for the Q2x/D2x und xtIO • Made of 3 mm stainless steel, white • Incl. mounting parts and 2 stainless	2.050 g	17,0 cm 7,1 l
Leel straps for pole diameters of 60 to 180 mm · Wall mounts (Mx-M-VM-DQ or MX- PT-WH) are not included in the scope of delivery and must be ordered separately		

4047438011389

21,0 cm



MX-OPT-IC-ESMA	4047438011433	29,6 cm
In-Ceiling Set For Q2x/D2x/ExtIO, Matt	90079100	19,6 cm
Suitable for: Q2x, D2x, ExtlO • Stainless steel ring (matt) • Consists of in-ceiling mount and mounting parts • Easy mounting from front • Provides optimum protextion for the camera • Inconspicious, as the visible profile is reduced to a minimum • Installation dimension (diameter): 150 mm	724 9	9,0 cm 5,2 l



 MX-OPT-IC-ESPO	4047438011426	29.6 cm	
In-Ceiling Set For Q2x/D2x/ExtIO, Polished	90079100	19.6 cm	
Suitable for: Q2x, D2x, ExtIO • Stainless steel ring (polished) • Consists of in-ceiling	724 9	9.0 cm	
mount and mounting parts • Easy mounting from front • Provides optimum protextion for the camera • Inconspicious, as the visible profile is reduced to a		5,2 l	
minimum • Installation dimension (diameter): 150 mm			



_				
	МХ-ОРТ-ІС	4047438011365	29,6 cm	
	In-Ceiling Set For Q2x/D2x/ExtIO, White	90079100	19,6 cm	
	Suitable for: Q2x, D2x, ExtlO • Consists of in-ceiling mount and mounting parts • Easy mounting from front • Provides optimum protextion for the camera • Inconspicious, as the visible profile is reduced to a minimum • Installation dimension (diameter): 150 mm	412 9	9,0 cm 5,2 l	



MX-DH-M24-SecureFlex	4047438015653	15,0 cm
Ceiling Mount For M16/M26	90079100	9,5 cm
Suitable for: M16, M26, M15, M25, M24 • Mounting set to convert the VarioFlex wall mount into a ceiling mount • Incl. mount, M6x30 connection screw , washer, M6 nut and rubber seal • Turning/tilting (mechanically): 360° horizontally, -90° to +20° vertically • Suspended ceiling installation with additional MxTubeMount (MX-MT- TUBE)	160 9	9,0 cm 1,3 l



MX-OPT-TW-Demo-1	4047438013055	14,8 cm
Demo Table/Wall Mount For Q2x/D2x	90079100	9,8 cm
Useful mount for testing and for finding the optimum mounting position of the single lens cameras Q2x Hemispheric or D2x Dome. The set includes an Allen wrench and a Torx screw with dowel and the corresponding Torx wrench for installing as alternative wall mount for testing. The camera can be placed on a flat surface or can be mounted on a tripod (1/4" tripod thread at the bottom of the mount).	170 9	9,0 cm 1,3 l

MOBOTIX Cables

|--|

Article No. / Name / Description	EAN / HS / weight	dimen.
MX-OPT-CBL-LAN-1-SP	4047438041591	23,5 cm
Ethernet Patch Cable for MOBOTIX M73, 1 m	85444210	15,0 cm
Ethernet Patch Cable for MOBOTIX M73 systems • Lenght 1 m/3,3 ft • 2x RJ45 plug with special MOBOTIX sealing ring and sealing plug	40 g	2,0 cm 0,7 l



MX-OPT-CBL-LAN-10-SP	4047438041560	27,0 cm
Ethernet Patch Cable for MOBOTIX M73, 10 m	85444210	17,0 cm
Ethernet Patch Cable for MOBOTIX M73 systems • Lenght 10 m/32,8 ft 2x RJ45 plug with special MOBOTIX sealing ring and sealing plug	465 9	4,0 cm 1,8 l



MX-OPT-CBL-LAN-2-SP	4047438041584	23,5 cm
Ethernet Patch Cable for MOBOTIX M73, 2 m	85444210	15,0 cm
Ethernet Patch Cable for MOBOTIX M73 systems • Lenght 2 m/6,6 ft • 2x RJ45 plug with special MOBOTIX sealing ring and sealing plug	65 9	2,0 cm 0,7 l



MX-OPT-CBL-LAN-5-SP		4047438041577	23,5 cm
Ethernet Patch Cable for MOBOTIX M73, 5 m		85444210	15,0 cm
Ethernet Patch Cable for MOBOTIX M73 systems • Lenght 5 m/16,4 ft with special MOBOTIX sealing ring and sealing plug	2x RJ45 plug	240 g	4,0 cm 1,4 l



MX-FLEX-OPT-CBL-015	4047438019941	9,8 cm
Sensor Module Cable For M15/M16, 0.15 m	85444210	7,5 cm
Lenght: 0.15 m/0,5 ft, to connect one sensor module (inside camera housing), angled plugs, only for M15/M16		9,0 cm 0,7 l



-			
	MX-FLEX-OPT-CBL-05	4047438018890	10,0 cm
	Sensor Cable For S1x, 0.5 m	85444210	7,5 cm
	Sensor cable, lenght 0.5 m/1,6 ft • For connecting optical sensor modules, BlockFlexMounts and thermal sensor modules to the camera module	66 g	9,0 cm 0,7 l



MX-FLEX-OPT-CBL-1	4047438018883	10,0 cm
Sensor Cable For S1x, 1 m	85444210	7,5 cm
Sensor cable, lenght 1 m/3,3 ft • For connecting optical sensor modules, BlockFlexMounts and thermal sensor modules to the camera module	80 g	9,0 cm 0,7 l



MX-FLEX-OPT-CBL-2	4047438018876	10,0 cm
Sensor Cable For S1x, 2 m	85444210	7,5 cm
Sensor cable, lenght 2 m/6,6 ft • For connecting optical sensor modules, BlockFlexMounts and thermal sensor modules to the camera module	116 9	9,0 cm 0,7 l



MX-FLEX-OPT-CBL-3	4047438024303	10,0 cm
Sensor Cable For S1x (6MP/Thermal), 3 m	85444210	7,5 cm
Sensor cable, length 3 m/9,8 ft • For connecting optical sensor modules and BlockFlexMounts with 6MP sensors and Thermal sensor modules to the S15/S16 camera module • Not compatible with PTMount-Thermal, S14D and 5MP modules	144 9	9,0 cm 0,7 l



MX-OPT-CBL-LAN-1	4047438012300	23,5 cm
Ethernet Patch Cable, 1 m	85444210	15,0 cm
Ethernet Patch Cable for MOBOTIX systems (except M73) • Lenght 1 m/3,3 ft • 2x RJ45 plug with special MOBOTIX sealing ring	36 9	2,0 cm 0,7 l



MX-OPT-CBL-LAN-10	4047438012331	27,0 cm
Ethernet Patch Cable, 10 m	85444210	17,0 cm
Ethernet Patch Cable for MOBOTIX systems (except M73) • Lenght 10 m/32,8 ft • 2x RJ45 plug with special MOBOTIX sealing ring	462 9	4,0 cm 1,8 l

	MX Eth Ethe plug
--	---------------------------

X-OPT-CBL-LAN-2	4047438012317	23,5 cm	
thernet Patch Cable, 2 m	85444210	15,0 cm	
hernet Patch Cable for MOBOTIX systems (except M73) • Lenght 2 m/6,6 ft • 2x RJ45 ug with special MOBOTIX sealing ring	62 9	2,0 cm	
		0,7 l	



MX-OPT-CBL-LAN-5	4047438012324	23,5 cm
Ethernet Patch Cable, 5 m	85444210	15,0 cm
Ethernet Patch Cable for MOBOTIX systems (except M73) • Lenght 5 m/16,4 ft • 2x RJ45 plug with special MOBOTIX sealing ring	237 9	4,0 cm 1,4 l



MX-FLEX-IO-CBL-015	4047438019958	13,5 cm
IO Connection Cable For M15/M16, 0.15 m	85444210	8,0 cm
Lenght: 0.15 m/0,5 ft, IO cable to the front element of the camera, only for M15/M16 (inside camera housing)	10 9	2,0 cm 0,2 l



MX-CBL-NPA-BAT-2	4047438013949	10,0 cm
NPA Battery Cable, 2 m	85444210	7,5 cm
NPA-PoE Battery Cable • Provides a power supply for the camera from car batteries or other power sources from 12 to 24 Volts • With self-resetting fuse • RJ45 connector to PoE injector, "+/-" terminals for power source • Can only be used with Mx-NPA PoE injector • Length: 2 m/6.6 ft	68 9	9,0 cm 0,7 l

Other Camera Accessories

Mx-M-SEC-SCREWS-SET	4047438045209	9,0 cm
		5,0 cm
Security Screw Set With Allen Bit For M73	90079100	7,5 cm
Triple set of anti-theft screws (1 pcs M6x65, 4 pcs M6x16, 2 pcs M6x13) to securely attach the M73. Incl. Allen bit for power screwdrivers (1/4" in drive with hole for security pin)	68 9	4,6 cm 0,3 l



4x

Mx-O-M7SA-Blind	4047438035415	9,0 cm
Blind Module M73	90079100	7,5 cm
For M73 • When operating the camera, it needs to be fitted either with sensor or blind modules. This closes off the front element and protects the camera against foreign objects, insects and water.	50 9	5,0 cm 0,3 l



MX-OPT-Ring-L10-L12-BL	4047438021241	7,5 cm
Sealing Ring For Hemispheric Sensor Modules, Black	90079100	4,9 cm
Enables weather resistance when removing the plastic dome of black hemispheric sensor modules (S1x/M1x) • To avoid burns by the hot lens, the dome must not be removed within the reach of persons • Color: black	16 9	9,0 cm 0,3 l



MX-OPT-Ring-L10-L12-PW	4047438021234	7,5 cm
Sealing Ring For Hemispheric Sensor Modules, White	90079100	4,9 cm
Enables weather resistance when removing the plastic dome of white hemispheric sensor modules (S1x/M1x) • To avoid burns by the hot lens, the dome must not be removed within the reach of persons • Color: white	16 9	9,0 cm 0,3 l



MX-OPT-SEC-SCREWS-SET	4047438021265	7,5 cm
Security Screw Set With Allen Bit For M1x/M2x	90079100	4,9 cm
Triple set of anti-theft screws for plugs (4 pcs 6x50) and for machine threads (4 pcs M6x15, 4 pcs M6x30) to securely attach the VarioFlex wall mount • Incl. Allen bit for power screwdrivers (1/4" in drive with hole for security pin)	120 g	9,0 cm 0,3 l

	MX-SM-Blind-PW	4047438019965	9,0 cm
2 1111 Store	Blind Module M1x	90079100	7,5 cm
	For M1x and M1x Thermal • When operating the camera, it needs to be fitted either with sensor or blind modules. This closes off the front element and protects the camera against foreign objects, insects and water.	46 g	5,0 cm 0,3 l

MOBOTIX MOVE Accessories

MOBOTIX MOVE Accessories

Article No. / Name / Description	EAN / HS / weight	dimen.
Mx-A-SD-DBC-EC	4047438041508	26,0 cm
Dome-Bubble EverClear (Clear) for MOBOTIX MOVE SD	90079100	25,5 cm
Dome Bubble EverClear (Clear) for MOBOTIX MOVE PTZ SD-230/330	580 9	17,0 cm
		11,3 l



MX-A-SD-DBT-EC	4047438041515	26,0 cm
Dome Bubble EverClear (Tinted) for MOBOTIX MOVE SD	90079100	25,5 cm
Dome Bubble EverClear (Tinted) for MOBOTIX MOVE PTZ SD-230/330	580 9	17,0 cm
		11,3 l



Mx-A-SD-DCS	4047438031776	26,0 cm
Tinted Dome For MOBOTIX MOVE SD-330	90079100	25,5 cm
Tinted replacement dome suitable for MOBOTIX MOVE SpeedDome SD-330 • For particularly bright environments	300 g	17,0 cm 11,3 l



Mx-A-SD-DCT	4047438031783	26,0 cm
Dome (Standard) For MOBOTIX MOVE SD-330	90079100	25,5 cm
Standard replacement dome suitable for MOBOTIX MOVE SpeedDome SD-330	300 g	17,0 cm
		11,3 l



Mx-A-VB-FGK-EC	4047438041546	12,0 cm
Frontglass Kit EverClear for MOBOTIX MOVE VandalBullet -	90079100	11,0 cm
Frontglass Kit EverClear for MOBOTIX MOVE VB VandalBullet VB (model > Nov. 21)	33 g	3,0 cm
		0,4 l

MO	BOT	'ΙΧ

]			
Mx-A-VD-DBC-EC	4047438041522	17,0 cm	
Dome Bubble EverClear (Clear) For MOBOTIX MOVE	90079100	17,0 cm	
Dome Bubble EverClear (Clear) For MOBOTIX MOVE VD VandalDomes	240 g	13,0 cm	
		3,8 l	



Mx-A-VD-DBT-EC	4047438041539	17,0 cm
Dome -Bubble EverClear (Tinted) For MOBOTIX MOVE	90079100	17,0 cm
Dome Bubble EverClear (Tinted) For MOBOTIX MOVE VD VandalDomes	240 g	13,0 cm
		3,8 l



	Mx-A-VD-DCS	4047438031714	16,1 cm
	Tinted Dome For MOBOTIX MOVE VandalDome	90079100	16,1 cm
Tinted replacement dome for particularly bright environments - Suitable for all MOBOTIX MOVE VandalDome cameras	210 9	11,5 cm	
		3,0 l	



Mx-A-VD-DCT	4047438031721	16,1 cm
Dome (Standard) For MOBOTIX MOVE VandalDome	90079100	16,1 cm
VD Standard replacement dome • Suitable for all MOBOTIX MOVE VandalDome	250 g	11,5 cm
cameras		3,0 l



Mx-A-VM-DBC	4047438047685	26,6 cm
Dome-Bubble (Clear) for MOBOTIX MOVE Vandal	90079100	25,0 cm
VM Standard replacement dome • Suitable for MOBOTIX MOVE Vandal Multisensor camera Mx-VM1A-20-IR-VA	530 9	8,5 cm 5,7 l



Mx-A-VM-DBT	4047438047692	26,6 cm
Dome-Bubble (Tinted) For MOBOTIX MOVE Vandal	90079100	25,0 cm
Tinted replacement dome for particularly bright environments • Suitable for MOBOTIX MOVE Vandal Multiisensor camera Mx-VM1A-20-IR-VA	530 g	8,5 cm 5,7 l

мо	BO	IIX

N P
В

Mx-M-BC-P	4047438031677	17,3 cm
Pole Mount For MOBOTIX MOVE BulletCamera	90079100	17,3 cm
BC Pole Mount suitable for all MOBOTIX MOVE BulletCameras (except Mx-BC1A-2-IR)	1.000 9	16,7 cm
		5,0 l



Mx-M-BC-W	4047438031660	17,3 cm	
Wall Mount For MOBOTIX MOVE BulletCamera	90079100	17,3 cm	
BC Wall Mount suitable for MOBOTIX MOVE BulletCamera (except Mx-BC1A-2-IR)	840 g	10,7 cm	
		3,2 l	



Mx-M-NVR16-RM	4047438037075	14,5 cm
19" Rack Mounting Brackets for MOVE NVR 16CH	85299096	11,0 cm
2x metal mounting brackets for imstalling MOBOTIX MOVE NVR 16CH in a 19" rack	447 9	6,0 cm
		1,0 l



Mx-M-NVR8-RM	4047438037068	14,5 cm
19" Rack Mounting Brackets for MOVE NVR 8CH	85299096	11,0 cm
$\rm 2xmetal$ mounting brackets for installing MOBOTIX MOVE NVR 8CH in an 19" rack	544 9	6,0 cm
		1,0 l



Mx-M-SD-C	4047438031769	21,0 cm
Corner Mount For MOBOTIX MOVE SD-330/SD-340-IR	90079100	12,5 cm
SD Corner Mount suitable for MOBOTIX MOVE SpeedDome SD-330 and SD-340-IR • Installation only in combination with SD Wall Mount (Mx-M-SD-W)	2.170 g	25,0 cm 6,6 l



Mx-M-SD-GN	4047438038997	90,0 cm
MOBOTIX MOVE SD Parapet Mount	90079100	57,0 cm
MOBOTIX MOVE SD Parapet Mount(Gooseneck) with integrated junction Box for MOBOTIX MOVE SpeedDome Mx-SD1A-330 and Mx-SD1A-340-IR	14.800 9	20,0 cm
MOBOLIX MOVE Speedbollie MX-SDIA-330 and MX-SDIA-340-IK		102,6 l

. 1	Mx-M-SD-P	4047438031752	31,0 cm
	Pole Mount For MOBOTIX MOVE SD-330/SD-340-IR	90079100	15,5 cm
•	SD Pole Mount suitable for MOBOTIX MOVE SpeedDome SD-330 und SD-340-IR • Installation only in combination with SD Wall Mount (Mx-M-SD-W)	1.580 9	26,0 cm 12,5 l
•			



Mx-M-SD-PM	4047438039000	64,0 cm
MOBOTIX MOVE SD Pendant Mount Kit	90079100	22,0 cm
MOBOTIX MOVE SD Pendant Mount Kit 25 cm icl. Base-Mount, 25 cm pendant pipe, installation material and safety wires 50cm & 1m. Max. extendable pendant mount lenght 1m by usage of additional pendant mount extension Mx-M-SD-PMEXT	2.295 g	22,0 cm 31,0 l



Mx-M-SD-PMEXT	4047438039017	14,4 cm
MOBOTIX MOVE SD PM Extension	90079100	14,5 cm
MOBOTIX MOVE SD Pendant Mount 25cm extension for Mx-M-SD-PM	800 g	28,0 cm
		5,8 l



Mx-M-SD-W	4047438031745	21,6 cm
Wall Mount For MOBOTIX MOVE SD-330/SD-340-IR	90079100	12,7 cm
SD Wall Mount suitable for MOBOTIX MOVE SpeedDome SD-330 and SD-340-IR • Can be combined with SD Pole Mount (Mx-M-SD-P) und SD-Corner Mount (Mx-M-SD-C)	840 9	14,8 cm 4,1 l



Mx-M-SD-WL	4047438048194	34,8 cm
Wall Mount long for MOBOTIX MOVE Speeddomes SD and	90079100	10,4 cm
Wall Mount long for MOBOTIX MOVE Speeddomes SD and Multisensor VMxx • Can be combined with SD Pole Mount (Mx-M-SD-P) und SD-Corner Mount (Mx-M-SD-C)	1.500 9	13,8 cm 5,0 l



Mx-M-SD-WM	4047438038973	33,0 cm
Wall Mount For MOBOTIX MOVE SpeedDome	90079100	15,0 cm
MOBOTIX MOVE SD Wall Mount supporting optional Junction Box Mx-M-SD-WMJB, suitable for MOBOTIX MOVE SpeedDome Mx-SD1A-330 and Mx-SD1A-340-IR	1.300 g	23,0 cm 11,4 l

MO	RO	TIX

Mx-M-SD-WMJB	4047438038980	29,0 cm
MOBOTIX MOVE SD Junction Box	90079100	32,0 cm
MOBOTIX MOVE SD Wall Mount Junction Box for use with Wall Mount Mx-M-SD-WM	4.800 g	19,0 cm 17,6 l



Mx-M-VD-C	4047438031738	21,0 cm
Corner Mount For MOBOTIX MOVE VandalDome	90079100	12,5 cm
VD Corner Mount suitable for all MOBOTIX MOVE VandalDome cameras	2.170 9	25,0 cm
		6.6 l



Mx-M-VD-IC	4047438031684	23,4 cm
In-Ceiling Set For MOBOTIX MOVE VandalDome	90079100	23,4 cm
VD In-Ceiling Set suitable for all MOBOTIX MOVE VandalDome cameras	800 g	12,8 cm
		7,0 l



Mx-M-VD-P	4047438031707	31,0 cm
Pole Mount For MOBOTIX MOVE VandalDome	90079100	15,5 cm
VD-Pole Mount suitable for all MOBOTIX MOVE VandalDome cameras	1.580 9	26,0 cm
		12,5 l



Mx-M-VD-W	4047438031691	31,0 cm
Wall Mount For MOBOTIX MOVE VandalDome	90079100	22,0 cm
VD Wall Mount Set (2-piece) suitable for all MOBOTIX MOVE VandalDome cameras	1.400 9	18,0 cm
		12,3 l



Mx-M-VM-AP	4047438047678	36,4 cm
Adapter Mountig Plate for MOBOTIX MOVE Vandal	90079100	34,5 cm
Adaptor Mounting Plate suitable for MOBOTIX MOVE Vandal Multisensor camera Mx- VM1A-20-IR-VA	1.950 g	12,8 cm 16,1 l

MO	BO.	TIX

|--|

Mx-M-VM-IC	4047438047661	- ,
In-Ceiling Set For MOBOTIX MOVE Vandal Multisensor In-Ceiling Set suitable for MOBOTIX MOVE Vandal Multisensor camera Mx-VM1A-20- IR-VA	90079100 965 ^g	12,8 cm
		14,0 l



Mx-M-VMSD-AP	4047438047517	32,2 cm
Adapter Mounting-Plate for MOBOTIX MOVE Vandal	90079100	32,2 cm
VMSD Adaptor Mounting -Plate suitable for MOBOTIX MOVE Vandal Multisensor PTZ Combo camera Mx-VMSD1A-2021-VA	1.570 9	11,9 cm _{12,3} l



Mx-M-VMSD-IC	4047438047708	40,9 cm
In-Ceiling Set For MOBOTIX MOVE Vandal Multisensor PTZ	90079100	38,9 cm
VMSD In-Ceiling Set suitable for MOBOTIX MOVE Vandal Multisensor PTZ Combo camera Mx-VMSD1A-2021-VA	3.500 g	22,6 cm 36,0 l



Mx-M-VT-AP	4047438049009	16,2 cm
Adapter Mountig-Plate for MOBOTIX MOVE Vandal Turret	90079100	17,2 cm
Adapter Mounting Plate suitable for MOBOTIX MOVE Vandal Turret Cameras VT-2-IR, VT-5-IR, VT-203-IR, VT-503-IR	600 g	14,3 cm 4,0 l



Mx-M-VT-JB	4047438049016	17,3 cm
Junction Box for MOBOTIX MOVE Vandal Turret Camera	90079100	17,1 cm
Junction Box suitable for MOBOTIX MOVE Vandal Turret Cameras VT-2-IR, VT-5-IR, VT -203-IR, VT-503-IR	950 9	13,4 cm 4,0 l



Mx-M-VT-WM	4047438048996	22,6 cm
Wall Mount for MOBOTIX MOVE Vandal Turret Camera	90079100	10,3 cm
Wall Mount suitable for MOBOTIX MOVE Vandal Turret Cameras VT-2-IR, VT-5-IR, VT -203-IR, VT-503-IR	600 g	15,5 cm 3,6 l

MOVE Other Accessories

	AITCE
	Mx-A-ETP14
	Plug-type P Plug-type power Input: 90-260V A
•	

	Article No. / Name / Description	EAN / HS / weight	dimen.
	Mx-A-ETP1A-2601-POW	4047438042581	19,4 cm
	Plug-type Power-supply for Mx-A-ETP1A-2601-SET	85365019	14,2 cm
)	Plug-type power supply for Mx-A-ETP1A-2601-SET • Output: 57V DC +/-3% / 1.2 A • Input: 90-260V AC (47-63Hz) • 68,4 Watt • Operating Temperature: 0-40 °C	490 9	4,0 cm 1,1 l



Mx-A-ETP1A-2601-SET	4047438041317	20,7 cm
Media converter set Ethernet(PoE+) – Twisted-Pair	85299030	12,5 cm
Mx-ETP1A-2601-SET Complete set consisting of two two-wire transmitting and receiving units for realising an Ethernet transmission path via Twisted Pair cable. • Transmission of Ethernet and PoE+ power supply via two-wire line according to IEEE1901. • Simple connection of 10/100 Mbps Ethernet end devices • Max. 95 Mbps transmission bandwidth, range up to 600m for data / 300m for PoE depending on the quality of the Twisted-Pair link • 128 bit AES network data encryption • Power supply 2-wire transmitter (Tx) and receiver (Rx) as well as end device via PoE+ network switch or external power supply 56VDC / 1.24 (not included!) • Connected end devices are supplied via PoE switch IEEE802.3at(PoE+), IUPoE up to 60W (requires ext. power supply unit). • Status LEDs (data, power supply, data link, PoE) • Integrated Overvoltage protection (IEC 61000-4-5 4kV(1.2 / 50us), 2kA(8 / 20us)). • Power Supply TX: T-Linx or DC12V-57V, RX: PoE Switch or DC48V-57V • Operational temperature: -20 to 60 (c - Dimensions: 80.4(L) x 61.6(W) x 24(H)mm • Weight: RX/TX: 102g • Warranty: 2 years	368 9	7,0 cm 1,8 l

4047438040754

85299030

1.900 g

42,5 cm

27,0 cm

17,5 cm

20,1 l



Mx-A-KBD1A-PTZ-JOG

MOBOTIX USB Keyboard with PTZ Joystick & Jog-Shuttle

USB control panel for operating MOBOTIX MxMC 2.6 and higher and MOBOTIX HUB incl. Control of software PTZ and motorized PTZ cameras and pan/tilt devices • Integrated 3-axis joystick • Integrated jog shuttle • 38 control keys with backlight predefined for MxMC functions or freely definable for MOBOTIX HUB • Integrated alarm buzzer • Suitable for operation as HID device on MOBOTIX VMS with Windows and MAC based operating systems via USB2.0 • Suitable for right- and left-handed users • Power supply: USB, max. 350 mA • Operating temperature: 0° - 45 °C (32 °F-113 °F)

System Components

Beyond Human Vision



All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX • 24.01.2025 • MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025

Functional Modules for MOBOTIX 7 Cameras



Mx-F-IRA-S	4047438034913	9,8 cm
M73/S74 IR Light Module for Standard Lens (45° - 60°)	85299030	7,5 cm
Infrared illuminator module for MOBOTIX M73/S74 camera night sensor modules with 45°-60° illumination angle (horizontal) • 850 nm • IP66 • Range in connection with the Ultra LowLight sensor modules: Standard lenses: up to 70 m	145 9	9,0 cm 0,7 l



Mx-F-IRA-T	4047438034920	9,8 cm
M73/S74 IR Light Module for Tele Lens (15° - 30°)	85299030	7,5 cm
Infrared illuminator module for MOBOTIX M73/S74 cameras night sensor modules with 15°-30° illumination angle (horizontal) • 850 nm • IP66 • Range in connection with the Ultra LowLight sensor modules: Tele lenses up to 100 m	145 9	9,0 cm 0,7 l



	Mx-F-IRA-W	4047438034906	9,8 cm
	M73/S74 IR Light Module for Wide Lens (95°)	85299030	7,5 cm
3	Infrared illuminator module for MOBOTIX M73/S74 camera night sensor modules with 95° illumination angle (horizontal) • 850 nm • IP66 • Range in connection with the Ultra LowLight sensor modules: Wide-angle lenses with W-IR illuminator: up to 40 m	145 9	9,0 cm 0,7 l



Mx-F-MSA	4047438035545	9,8 cm
MOBOTIX 7 MultiSense Outdoor	85299030	7,5 cm
Weatherproof multi-sensor module with four environmental sensors: passive infrared sensor PIR, brightness sensor, temperature sensor (max ±0.4°C / 0.72°F) and microphone • Camera connection and supply via MOBOTIX 7 sensor cable (up to 3m): power consumption approx. 100 mW • Status LED • Compact device using a screwable sensor module housing • Easy installation without accessories (e.g., in suspended ceilings) • Protection class IP66 • IK05 • Housing color: white	100 g	9,0 cm 0,7 l



	Mx-F-S7A-INT01 S74 IO Slide in Board	4047438035576 85299030	14,8 cm 9,8 cm	
,	S74 IO slide in board with 1x input / output, 1x line in / out and 1x mic in / speaker out functionality • Connection option for audio module Mx-F-AUDA with audio cable Mx-A-S7A-AUCBL05-AN	110 9	9,0 cm 1,3 l	



	Mx-F-S7A-LSA	4047438037051	14,8 cm	
	S74 network slide in board with LSA terminal	85299030	9,8 cm	
	S74 network slide in board with LSA terminal	110 9	9,0 cm	
9			1,3 l	



Mx-F-S7A-RJ45	4047438035569	14,8 cm
S74 Network slide in board with RJ45 socket	85299030	9,8 cm
S74 Network slide in board with RJ45 socket	110 9	9,0 cm
		1,3 l



Mx-F-S7A-RJ45-VDC	4047438039680	14,8 cm
S74 RJ45 Network slide in board with 12/24 VDC Power	85299030	9,8 cm
S74 Network slide in board with RJ45 socket and 12/24V DC Power Supply	110 9	9,0 cm
		1,3 l



Mx-F-WLA-S	4047438042529	9,8 cm
M73/S74 White Light for Standard lens 45-60°	85395200	7,5 cm
White light illuminator module for MOBOTIX M73/S74 cameras with an angle of view 45-60° (horizontal) • IP66 • Range in connection with the Ultra LowLight sensor modules: Standard lenses with illuminator: up to 60 m	145 9	9,0 cm 0,7 l



Mx-F-WLA-T	4047438042536	9,8 cm
M73/S74 White Light for tele lens 15-30°	85395200	7,5 cm
White light illuminator module for MOBOTIX M73/S74 cameras with an angle of view 15-30° (horizontal) • IP66 • Range in connection with the Ultra LowLight sensor modules: Tele lenses with illuminator: up to 80 m	145 g	9,0 cm 0,7 l

	()	
	1		

Mx-F-WLA-W	4047438042512	9,8 cm
M73/S74 White Light for Wide Lens 95°	85395200	7,5 cm
White light illuminator module for MOBOTIX M73/S74 cameras with an angle of view 95° (horizontal) • IP66 - Range in connection with the Ultra LowLight sensor modules: Wide-angle lenses with illuminator: up to 40 m	145 9	9,0 cm 0,7 l

Interface Boxes

N

	Article No. / Name / Description	EAN / HS / weight	dimen.
	Mx-F-4IOA	4047438048309	10,0 cm
	Input/Output Box for MOBOTIX 7 and MOBOTIX ONE	85299030	7,5 cm
	Weatherproof connection of external sensors and switching of external devices via	130 g	9,0 cm
Mx-4IOA-Box	MOBOTIX cameras • Connection to camera using USB-C• 4 galvanically isolated inputs, 4 relay output • Protection class IP66/IK08, -30 to 60°C / -22 to 140°F		0,7 l



	Mx-F-GPSA	4047438048316	10,5 cm
	GPS Box for MOBOTIX 7 and ONE	85299030	6,8 cm
)	Weatherproof GPS time base for MOBOTIX 7 and ONE cameras • GPS and Glonass support • Connects via USB-C • Protection class IP66/IK08, -30 to 60°C / -22 to +140°F	120 9	10,5 cm 0.7 l



Mx-F-NPAA	4047438048323	10,0 cm	
POE Power Adapter for MOBOTIX cameras	85299030	7,5 cm	
Weatherproof PoE Injector and network connector • Needs external power supply units and batteries from 12 to 24V DC • Protection class IP66/IK08, -30 to 50°C / -22 to 122°F • Important: only use with original MOBOTIX patch cables	140 9	9,0 cm 0,7 l	



MX-Overvoltage-Protection-Box-LSA	4047438018470	10,0 cm
Network Connector with Surge Protection, LSA Version	85299030	7,5 cm
Weatherproof connection of one MOBOTIX patch cable (RJ45, from camera) and the network installation cable • Protects one MOBOTIX camera against surges of up to 4 kV on the PoE network cabling • Complete set including mounting supplies • Protection class IP66/IK08, -30 to 60°C / -22 to 140°F • Box can be mounted safely out of reach in the wall mounts of MIX, M2x, D1x, D2x	146 9	9,0 cm 0,7 l



MX-Overvoltage-Protection-Box-RJ45	4047438018463	10,0 cm
Network Connector with Surge Protection, RJ45 Version	85299030	7,5 cm
Weatherproof connection of two MOBOTIX patch cables (RJ45, one from the camera) • Protects one MOBOTIX camera against surges of up to 4 kV on the PoE network cabling • Complete set including mounting supplies • Protection class IP66/IK08, -30 to 60°C / -22 to 140°F • Box can be mounted safely out of reach in the wall mounts of M1x, M2x, D1x, D2x	150 9	9,0 cm 0,7 l

Functional Enhancement & IR Illuminators

	MX-OPT-IO3-INT Extension Module For c25, i25, p25 And v25
MAX AVAILAN	Extension module for the indoor cameras x25 (to be mounted on the backside) • Not compatible with x26 indoor cameras • For the connection of external sensors (e.g., door or window • contacts) and switching of external devices (e.g., relays with lamps and motors) • Two input lines (galvanically isolated, 0 to 48 V AC/DC) • Two output lines: 2x • isolated (contact load max.30 W or 1 A or 48 V AC/DC) or 2x 12 V DC (max. 50 mA • per output line) • MXBus terminal (1x2) • Ambient temperature: 0 to 4°C (32 to 104°F) • Power consumption: 1 W

Article No. / Name / Description EAN / HS / weight dimen. 4047438025928 PT-IO3-INT 10,7 cm sion Module For c25, i25, p25 And v25 85299030 5,2 cm n module for the indoor cameras x25 (to be mounted on the backside) • Not 45 g 8,7 cm ole with x26 indoor cameras • For the connection of external sensors (e.g., 0,5 l vindow • contacts) and switching of external devices (e.g., relays with lamps ors) • Two input lines (galvanically isolated, 0 to 48 V AC/DC) • Two output isolated (contact load max.30 W or 1 A or 48 V AC/DC) or 2x 12 V DC (max.

4047438029032

85299030

45 g

10,7 cm

5,2 cm

8,7 cm

0,5 l

Mx-A-IOA-IC

Extension Module For All Indoor Cameras x26A/x26B

Expansion module for Indoor Cameras c26A/B, i26A/B, p26A/B and v26A/B (installed on the back) • Not suitable for x25 indoor cameras • For connecting external sensors (e.g., door and window contacts) and switches of external devices (e.g., relays with lamps and motors) \bullet Two inputs (galvanically separated): 0 V to 48 V AC/DC \bullet Two outputs: 2x floating (load per contact max. 30 W or 1 A or 48 V AC/DC) or 2x 12 V DC (max. 50 mA per output) • 2x MxBus terminal connector (MxBus will be supported only by the x26B Indoor Cameras) • Ambient temperature: 0°C to 40°C (32°F to 104°F) Power consumption: 1 W



Mx-A-IRA-120	4047438030342	20,5 cm
MxIRLight Infrared Illuminator (860 nm), 120°x120°	85394900	17,5 cm
Infrared illuminator with 120° illumination angle (horizontal and vertical), aluminum housing • 860 nm • IP67 • Range: up to 20 m (66 ft.) • PoE+ power supply via network cable (IEEE 802.3at), 19 W (max.) power consumption • Photosensor for automatic switching on/off (threshold value: 3 lux, delay for switching off: 150 s) • Including standard mount for installing on wall and ceiling, screws, preassembled 0.9 m patch cable with RJ45 connector and MOBOTIX special sealing ring • Optional accessories: mounting brackets for M1x/M2x (Mx-M-IRA-ML/Mx-M-IRA-M) • Housing color: white	1.098 g	



Mx-A-IRA-90	4047438030359	20,5 cm
MxIRLight Infrared Illuminator (860 nm), 90°x90°	85394900	17,5 cm
Infrared illuminator with 90° illumination angle (horizontal and vertical), aluminum housing • 860 nm • IP67 • Range: up to 35 m (115 ft.) • PoE+ power supply via network cable (IEEE 802.3at), 19 W (max.) power consumption • Photosensor for automatic switching on/off (threshold value: 3 lux, delay for switching off: 150 s) • Including standard mount for installing on wall and ceiling, screws, preassembled 0.9 m patch cable with RJ45 connector and MOBOTIX special sealing ring • Optional accessories: mounting brackets for M1x/M2x (Mx-M-IRA-ML/Mx-M-IRA-M) • Housing color: white	1.112 9	12,5 cm 4,5 l



Mx-A-IRA-60	4047438030366	20,5 cm	
MxIRLight Infrared Illuminator (860 nm), 60°x60°	85394900	17,5 cm	
Infrared illuminator with 60° illumination angle (horizontal and vertical), aluminum housing • 860 nm • IP67 • Range: up to 50 m (165 ft.) • PoE+ power supply via network cable (IEEE 802.3at), 19 W (max.) power consumption • Photosensor for automatic switching on/off (threshold value: 3 lux, delay for switching off: 150 s) • Including standard mount for installing on wall and ceiling, screws, preassembled 0.9 m patch cable with RJ45 connector and MOBOTIX special sealing ring • Optional accessories: mounting brackets for M1x/M2x (Mx-M-IRA-M1/Mx-M-IRA-M1) • Housing color: white	1.116 9	12,5 cm 4,5 l	

	MOBOTIX			
	Mx-A-IRA-45	4047438030373	20,5 cm	
	MxIRLight Infrared Illuminator (860 nm), 45°x45°	85394900	17,5 cm	
	Infrared illuminator with 45° illumination angle (horizontal and vertical), aluminum housing - 860 nm - IP67 - Range: up to 80 m (262 ft.) - POE+ power supply via network cable (IEEE 802.3at), 19 W (max.) power consumption - Photosensor for automatic switching on/off (threshold value: 3 lux, delay for switching off: 150 s) - Including standard mount for installing on wall and ceiling, screws, preassembled 0.9 m patch cable with RJ45 connector and MOBOTIX special sealing ring - Optional accessories: mounting brackets for M1x/M2x (Mx-M-IRA-ML/Mx-M-IRA-M) - Housing color white	1.124 9	12,5 cm 4,5 l	
	Mx-A-IRA-30 MxIRLight Infrared Illuminator (860 nm), 30°x30°	4047438030380 85394900	20,5 cm 17,5 cm	
•	Infrared illuminator with 30° illumination angle (horizontal and vertical), aluminum housing • 860 nm • IP67 • Range: up to 120 m (394 ft.) • PoE+ power supply via network cable (IEEE 802.3at), 19 W (max.) power consumption • Photosensor for automatic switching on/off (threshold value: 3 lux, delay for switching off: 150 s) • Including standard mount for installing on wall and ceiling, screws, preassembled 0.9 m patch cable with RJ45 connector and MOBOTIX special sealing ring • Optional accessories: mounting brackets for M1x/M2x (Mx-M-IRA-ML/Mx-M-IRA-M) • Housing color: white	1.096 9	12,5 cm 4,5 l	
		4047420202027	20 5	
	Mx-A-IRA-15	4047438030397	20,5 cm	
	MxIRLight Infrared Illuminator (860 nm), 15°x15° Infrared illuminator with 15° illumination angle (horizontal and vertical), aluminum housing • 860 nm • IP67 • Range: up to 160 m (525 ft.) • PoE+ power supply via network cable (IEEE 802.3at), 19 W (max.) power consumption • Photosensor for automatic switching on/off (threshold value: 3 lux, delay for switching off: 150 s) • Including standard mount for installing on wall and ceiling, screws, preassembled 0.9 m patch cable with RJ45 connector and MOBOTIX special sealing ring • Optional accessories: mounting brackets for M1x/M2x (Mx-M-IRA-ML/Mx-M-IRA-M) • Housing color: white	85394900 1.090 9	17,5 cm 12,5 cm 4,5 l	
	Mx-M-IRA-ML	4047438030403	19,6 cm	
2 3	MxIRLight Mounting Brackets For M1x	85399010	5,5 cm	
	Mounting brackets "Large" for the MOBOTIX M15/M16 AllroundDual cameras •	216 9	3,5 cm	
. 0	Accessories for the MxIRLight Infrared Illuminator • Material: aluminum • Color: white		0,4 l	
	7			
	Mx-M-IRA-M	4047438030410	14,0 cm	
	MxIRLight Mounting Brackets For M2x Mounting brackets for the MOBOTIX M25/M26 Allround cameras • Accessories for the	85399010	5,5 cm	
	Mounting brackets for the MOBO HX M25/M26 Allfound Cameras • Accessories for the MXIRLight Infrared Illuminator • Material: aluminum • Color: white	150 9	3,5 cm 0,3 l	
L				

PoE Power Supply



Article No. / Name / Description	EAN / HS / weight	dimen.
Mx-NPA-PoE1A-60W-BT	4047438047531	17,0 cm
PoE++ Power Network Injektor 60 Watt	85043180	7,0 cm
PoE++ 60W Network Power injector • AC Input Voltage: 100 to 240 VAC (50 to 60Hz) • AC Input Current: 1.5A @100-240 VAC • Operating Ambient Temperature: • -10° to 40°C @60W • -10° to 50°C, humidity 10 to 90% @30W • IEEE 802.3bt compliant • Output power of 60W over 4-pairs • Supports 10/100/1000Base-T applications • Plug- and-play installation • Full Protection OVP, OCP • Additional required power cord C14-type not included • Warranty: 1 year	318 9	4,7 cm 0,6 l



Mx-NPA-UPoE1A-60W	4047438039024	20,5 cm
UPoE Power Injector 60W	85043180	11,5 cm
UPoE (PoE++) 60W Network Power injector • AC Input Voltage: 100 to 240 VAC (50 to 60Hz) • AC Input Current: 1.5A @100-240 VAC • Operating Ambient Temperature: • 14° to 113°F @60W • 14° to 131°F @30W • IEEE 802.3at compliant with 2-event classification • IEEE 802.3af backward compatible • Output power of 60W over 4-pairs • Supports 10/100/1000Base-T applications • Plug-and-play installation	450 9	6,5 cm 1,5 l



MX-NPA-PoE-EU-Set	4047438012249	14,8 cm
PoE Power Adapter Set, EU	85043180	9,8 cm
PoE injector incl. crossover function for direct connection to the PC • With power plug for Europe • For all MOBOTIX cameras (except for M1 und M10), Mx2wire+ and all PoE devices • Provides compliant PoE power supply (IEEE 802.3af) for direct connection to PC and camera • Kit includes blue adapter with 3 sockets RJ45 and universal power supply with RJ45 plug	268 9	9,0 cm 1,3 l



MX-NPA-PoE-INT-Set	4047438012256	14,8 cm
PoE Power Adapter Set, INT	85043180	9,8 cm
PoE injector incl. crossover function for direct connection to the PC • With 4 exchangeable power plugs for Europe, United Kingdom, USA and Australia • For all MOBOTIX cameras (except for M1 und M10), Mx2wire+ and all PoE devices • Provides compliant PoE power supply (IEEE 802.3af) for direct connection to PC and camera • Kit includes blue adapter with 3 sockets RJ45 and universal power supply with RJ45 plug	314 9	9,0 cm 1,3 l



MX-NPA-PoE-RJ	4047438013932	9,0 cm
PoE Power Adapter	85043180	7,5 cm
PoE injector (IEEE 802.3af) incl. crossover function for direct connection to the PC • Blue adapter with 3 sockets RJ45 and universal power supply with RJ45 plug • Without power plug, additional power supply (12 to 57 V DC) and connection cable needed	60 g	5,0 cm 0,3 l

-	MX-SNT-INT-PoE	4047438013925	9,8 cm
	Universal Power Supply With 4 Power Plugs	85043180	7,5 cm
A.A.O.	For international use thanks to broad input voltage range and interchangeable power plugs (no tools required) • With 4 power plugs for Europe, United Kingdom, USA and Australia • Connections: 1x RJ45 (for adapter), 1x network (up to 4x interchangeable adapter) • Nominal data input: 100 V to 240 V, 50 to 60 Hz/400 mA • Nominal data output: DC 24 V/750 mA • Ambient temperature: 0 to 40°C / 32 to 104 °F	160 g	9,0 cm 0,7 l

MOBOTIX Storage & Recording Solutions

Article No. / Name / Description	EAN / HS / weight	dimen.	
Mx-S-NVR1A-64-POE24	4047438040365	58,0 cm	
MOBOTIX MOVE NVR Network Video Recorder 64 Channels	85219000	58,0 cm	
MOBOTIX MOVE NVR Network Video Recorder for recording and Display up to 64 IP Cameras (Resolution up to 12MP) • 24 integrated PoE+ Ports for cetralized powering of connected IP-Cameras • 8x 3.5" SATA3 locklable HDD cartridge-slots (Delivery without hard disks (not available via MOBOTIX) • Harddrives "Hot-Swappable" • RAID 0/1/5/10 Support for Data recovering in case of HDD Failure • Optional Failover- Server functionality withing MOVE NVR System • IP-Data-Throughput (Live & Recording): avrg.: 480 Mbps, peak 2upt to 540 Mbps • Video-Codecs : H.264 / H.265 • Support of ONVIF S conformant 3rd Party cameras • APP remote access (IOS / Android), Live, Playback • iSCSI NAS Storage support • 19"-Rack mount kit included. Environmental Temperature 0 to 40°c • Power Supply: AC AC 100-240V, ATX 520W		25,0 cm 84,1 l	
 (53V/360W for PoE; 12V/160W for HDD/System) • Incl. Power cable with EU plug (cable with US / GB / AU plug available on request) • Warranty: 5 Years (excl. HDD's)			
Mx-S-NVR1B-16-POE	4047438047623	49,5 cm	
MOBOTIX MOVE NVR Network Video Recorder 16 Channels	85219000	34,5 cm	
MOBOTIX MOVE NVR Network Video Recorder with 16 integrated PoE IP camera	8.500 g	18,1 cm	

30,9 l

42,6 cm

37,9 cm

11,0 cm

17,8 l

4047438047616

85219000

4.200 g

araa T

MOBOTIX MOVE NVR Network Video Recorder with 16 integrated PoE IP camera channels (support of up to 24 IP cameras in total) • 8GB RAM integrated • Max. Storage capacity net: 28 TB (2x 3.5" SATA3) • Supplied without hard disks (not available via MOBOTIX) • IP data throughput (live & recording): max. 240 Mbps• Recording compression: H.264 / H.265 • Supports ONVIF S compliant third-party cameras • APP remote access (IOS / Android), live, playback • CMS (Central Monitoring Software) Remote Zugriff • Integrierated in MOBOTIX HUB VMS • iSCSI NAS storage support • Incl. power connection cable with EU plug (cable with US/GB/AU plug available on request) • Warranty: 5 Years (excl. HDD's)

annan 2 - 2 B Marian

Mx-S-NVR1B-8-POE


MOBOTIX MOVE NVR Network Video Recorder 8 Channels

MOBOTIX MOVE NVR Network Video Recorder with 8 integrated PoE IP camera channels (support of up to 12 IP cameras in total) • 4GB RAM integrated • Max. Storage capacity net: 20 TB (2x 3.5" SATA3)Supplied without hard disks (not available via MOBOTIX) • IP data throughput (live & recording): max. 160 Mbps • Recording & playback: H.264 / H.265 • Supports ONVIF S compliant third-party cameras • APP remote access (IOS / Android), live, playback • CMS (Central Monitoring Software) Remote Zugriff • Integrierated in MOBOTIX HUB VMS • ISCSI NAS storage support • Incl. power connection cable with EU plug (cable with US/GB/AU plug available on request) • Warranty: 5 Years (excl. HDD's)

MOBOTIX Cloud

Beyond Human Vision

MOBOTIX





MOBOTIX Cloud Bridge

Article No. / Name / Description	EAN / HS / weight	dimen.
Mx-S-BRIDGEB-DT-20	4047438043588	29,6 cm
MOBOTIX CLOUD Bridge 304+ for up to 20 IP Cameras	85299030	19,6 cm
High-security connection box for the MOBOTIX CLOUD VMS • Locally connected to the Internet and up to 20 ONVIF IP cameras at 4MP resolution • Cybersecure connection to regionally available MOBOTIX CLOUD data centers • Secure end-to- end encryption of all data stored and transferred in the system • No data loss in case of up to 2-day Internet outage: Integrated hard disk as a memory buffer in case of interrupted connection to the cloud • No data loss due to Internet bandwidth fluctuations: Automatic data buffering in the BRIDGE • Ultra flexible cloud data storage with individually selectable retention period (max. 5 years) • Compact, robust metal housing with an extended temperature range and fanless device design for maximum reliability thanks to SSD memory • Dimensions (LxWxH): 127 x 127 x 45 mm (5" x 5" x 1.75") • Connections: AC power supply (adapter included), 2x ETH (1x for PoE switch for local cameras, 1x for internet router), monitor and keyboard (optional) • Integrated display for status display such as the IP		9,0 cm 5,2 l

MOBOTIX Cloud Subscriptions

Article No. / Name / Description	EAN / HS / weight	dimen.
Mx-CL-Sub-ANA-001-12	4047438042062	cm
MOBOTIX CLOUD Yearly Analytics Subscription, Line Cross		cm
Yearly subscription for using the MOBOTIX CLOUD Analytics: Line Cross • Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-ANA-001-36	4047438046701	cm
MOBOTIX CLOUD 3 Yearly Analytics Subscription, Line Cross		cm
3 Yearly subscription for using the MOBOTIX CLOUD Analytics: Line Cross • Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-ANA-001-60	4047438046718	cm
MOBOTIX CLOUD 5 Yearly Analytics Subscription, Line Cross		cm
5 Yearly subscription for using the MOBOTIX CLOUD Analytics: Line Cross • Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-ANA-002-12	4047438042079	cm
MOBOTIX CLOUD Yearly Analytics Subscription, Counting		cm
Yearly subscription for using the MOBOTIX CLOUD Analytics: Counting • Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-ANA-002-36	4047438046725	cm
MOBOTIX CLOUD 3 Yearly Analytics Subscription, Counting		cm
3 Yearly subscription for using the MOBOTIX CLOUD Analytics: Counting • Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l

	1			
$\overline{}$	Mx-CL-Sub-ANA-002-60	4047438046732	cm	
	MOBOTIX CLOUD 5 Yearly Analytics Subscription, Counting		cm	
\sim	5 Yearly subscription for using the MOBOTIX CLOUD Analytics: Counting •	g	cm	
	Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual		l	
	billing.			



Mx-CL-Sub-ANA-003-12	4047438042086	cm
MOBOTIX CLOUD Yearly Analytics Subscription, Area		cm
Yearly subscription for using the MOBOTIX CLOUD Analytics: Area Intrusion • Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-ANA-003-36	4047438046749	cm
MOBOTIX CLOUD 3 Yearly Analytics Subscription, Area		cm
3 Yearly subscription for using the MOBOTIX CLOUD Analytics: Area Intrusion • Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-ANA-003-60	4047438046756	cm
MOBOTIX CLOUD 5 Yearly Analytics Subscription, Area		cm
5 Yearly subscription for using the MOBOTIX CLOUD Analytics: Area Intrusion • Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-ANA-004-12	4047438042093	cm
MOBOTIX CLOUD Yearly Analytics Subscription, Camera		cm
Yearly subscription for using the MOBOTIX CLOUD Analytics: Camera Tamper Detect • Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-ANA-004-36	4047438046763	cm
MOBOTIX CLOUD 3 Yearly Analytics Subscription, Camera		cm
3 Yearly subscription for using the MOBOTIX CLOUD Analytics: Camera Tamper Detect • Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l

MOBOTIX

Mx-CL-Sub-ANA-004-60 MOBOTIX CLOUD 5Y Analytics Subscription, Camera Tamper	4047438046770	cm cm
5 Yearly subscription for using the MOBOTIX CLOUD Analytics: Camera Tamper Detect • Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-ANA-005-12	4047438042109	cm
MOBOTIX CLOUD Yearly Analytics Subscription, Loitering		cm
Yearly subscription for using the MOBOTIX CLOUD Analytics: Loitering • Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-ANA-005-36	4047438046787	cm
MOBOTIX CLOUD 3 Yearly Analytics Subscription, Loitering		cm
3 Yearly subscription for using the MOBOTIX CLOUD Analytics: Loitering • Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-ANA-005-60	4047438046794	cm
MOBOTIX CLOUD 5 Yearly Analytics Subscription, Loitering		cm
5 Yearly subscription for using the MOBOTIX CLOUD Analytics: Loitering • Cancellation possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-ED001-1	4047438048002	cm
1 Month MOBOTIX CLOUD Subscription, update to		cm
1 Month subscription for using the Account function of the Professional Editon in the MOBOTIX CLOUD - Independently from the amount of cameras • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-ED001-12	4047438048019	cm
MOBOTIX CLOUD Yearly Subscription, update to		cm
Yearly subscription for using the Account function of the Professional Edition in the MOBOTIX CLOUD • Independently from the amount of cameras • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l

cm cm cm l

|--|

Mx-CL-Sub-ED001-36		4047438048026
3 Years MOBOTIX CLOU	ID Subscription, update to	
MOBOTIX CLOUD • Independent MOBOTIX CLOUD app for deskto	e Account function of the Professional Edition in the ly from the amount of cameras • Free use of the p PC and mobile devices (Android and iOS) • Access m • Cancellation/adjustment possible at any time at od.	g



Mx-CL-Sub-ED001-60	4047438048033	cm
5 Years MOBOTIX CLOUD Subscription, update to		cm
5 Years subscription for using the Account function of the Professional Edition in the MOBOTIX CLOUD • Independently from the amount of cameras • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



Mx-CL-Sub-ED002-1	4047438048040	cm
1 Month MOBOTIX CLOUD Subscription, update to		cm
1 Month subscription for using the Account function of the Enterprise Editon in the MOBOTIX CLOUD • Independently from the amount of cameras • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month.	g	cm l



	Mx-CL-Sub-ED002-12	4047438048057	cm
l	MOBOTIX CLOUD Yearly Subscription, update to Enterprise		cm
	Yearly subscription for using the Account function of the Enterprise Edition in the MOBOTIX CLOUD • Independently from the amount of cameras • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



	Mx-CL-Sub-ED002-36	4047438048064	cm
I	3 Years MOBOTIX CLOUD Subscription, update to Enterprise		cm
	3 Years subscription for using the Account function of the Enterprise Edition in the MOBOTIX CLOUD • Independently from the amount of cameras • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



Mx-CL-Sub-ED002-60	4047438048071	cm
5 Years MOBOTIX CLOUD Subscription, update to Enterprise		cm
5 Years subscription for using the Account function of the Enterprise Edition in the MOBOTIX CLOUD • Independently from the amount of cameras • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



Mx-CL-Sub-HD1-D1095-12 MOBOTIX CLOUD Yearly Camera Subscription, 720p/1095	4047438041744	cm cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D1095-36	4047438045667	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 720p/1095		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D1095-60	4047438045674	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 720p/1095		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D14-12	4047438041676	cm
MOBOTIX CLOUD Yearly Camera Subscription, 720p/14 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD1-D14-36	4047438045520	cm
I	MOBOTIX CLOUD 3 Yearly Camera Subscription, 720p/14		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D14-60	4047438045537	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 720p/14		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D180-12 MOBOTIX CLOUD Yearly Camera Subscription, 720p/180	4047438041713	cm cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D180-36	4047438045605	cm	
MOBOTIX CLOUD 3 Yearly Camera Subscription, 720p/180		cm	
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-HD1-D180-60	4047438045612	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 720p/180		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



_			
	Mx-CL-Sub-HD1-D1825-12	4047438041751	cm
l	MOBOTIX CLOUD Yearly Camera Subscription, 720p/1825		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max.	g	cm
	Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
L	Cancellation/adjustment possible at any time at the end of the subscription period. •		
)	Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



	Mx-CL-Sub-HD1-D1825-36	4047438045681	cm
I	MOBOTIX CLOUD 3 Yearly Camera Subscription, 720p/1825		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D1825-60	4047438045698	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 720p/1825		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D30-12 MOBOTIX CLOUD Yearly Camera Subscription, 720p/30 Days	4047438041683	cm cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 7209 • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D30-36	4047438045544	cm	
MOBOTIX CLOUD 3 Yearly Camera Subscription, 720p/30		cm	
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-HD1-D30-60	4047438045551	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 720p/30		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D365-12	4047438041720	cm
MOBOTIX CLOUD Yearly Camera Subscription, 720p/365		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max.	g	cm
Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
Cancellation/adjustment possible at any time at the end of the subscription period. •		
Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



	Mx-CL-Sub-HD1-D365-36	4047438045629	cm
L	MOBOTIX CLOUD 3 Yearly Camera Subscription, 720p/365		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 7209 • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D365-60	4047438045636	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 720p/365		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D60-12 MOBOTIX CLOUD Yearly Camera Subscription, 720p/60 Days	4047438041690	cm cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D60-36	4047438045568	cm	
MOBOTIX CLOUD 3 Yearly Camera Subscription, 720p/60		cm	
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-HD1-D60-60	4047438045575	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 720p/60		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



_			
	Mx-CL-Sub-HD1-D7-12	4047438041669	cm
l	MOBOTIX CLOUD Yearly Camera Subscription, 720p/7 Days		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to	g	cm l
	annual billing.		



>	Mx-CL-Sub-HD1-D7-36	4047438045506	cm
I	MOBOTIX CLOUD 3 Yearly Camera Subscription, 720p/7		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D7-60	4047438045513	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 720p/7		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D730-12 MOBOTIX CLOUD Yearly Camera Subscription, 720p/730	4047438041737	cm cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



_				
	Mx-CL-Sub-HD1-D730-36	4047438045643	cm	
	MOBOTIX CLOUD 3 Yearly Camera Subscription, 720p/730		cm	
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-HD1-D730-60	4047438045650	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 720p/730		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D90-12	4047438041706	cm
MOBOTIX CLOUD Yearly Camera Subscription, 720p/90 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max.	g	cm
Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
Cancellation/adjustment possible at any time at the end of the subscription period.		
Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



	Mx-CL-Sub-HD1-D90-36	4047438045582	cm
I	MOBOTIX CLOUD 3 Yearly Camera Subscription, 720p/90		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD1-D90-60	4047438045599	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 720p/90		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 720p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD10-D1095-12	4047438042390	cm
MOBOTIX CLOUD Yearly Camera Subscription, 10	MP/1095	cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD duration (retention period): 1095 days (automatic deletion afterward Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop F devices (Android and iOS) • Access portal: https://mobotixcloud.com Cancellation/adjustment possible at any time at the end of the subsc Mixed billing not possible! • All devices in the sub-account must be sw annual billing.	s) • Max. C and mobile • ription period. •	cm l



-				
	Mx-CL-Sub-HD10-D1095-36	4047438046664	cm	
	MOBOTIX CLOUD 3 Yearly Camera Subscription, 10MP/1095		cm	
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-HD10-D1095-60	4047438046671	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 10MP/1095		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD10-D14-12	4047438042321	cm
L	MOBOTIX CLOUD Yearly Camera Subscription, 10MP/14		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l

	Mx-CL-Sub-HD10-D14-36	4047438046527	cm
L	MOBOTIX CLOUD 3 Yearly Camera Subscription, 10MP/14		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD10-D14-60	4047438046534	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 10MP/14		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD10-D180-12	4047438042369	cm
MOBOTIX CLOUD Yearly Camera Subscription, 10MP/180		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD10-D180-36	4047438046602	cm	
MOBOTIX CLOUD 3 Yearly Camera Subscription, 10MP/180		cm	
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-HD10-D180-60	4047438046619	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 10MP/180		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD10-D1825-12	4047438042406	cm
I	MOBOTIX CLOUD Yearly Camera Subscription, 10MP/1825		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max.	g	cm
	Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
I	Cancellation/adjustment possible at any time at the end of the subscription period.		
	Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



	Mx-CL-Sub-HD10-D1825-36	4047438046688	cm
I	MOBOTIX CLOUD 3 Yearly Camera Subscription, 10MP/1825		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l
	5		



Mx-CL-Sub-HD10-D1825-60	4047438046695	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 10MP/1825		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l

\bigcirc

Mx-CL-Sub-HD10-D30-12 MOBOTIX CLOUD Yearly Camera Subscription, 10MP/30	4047438042338	cm cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD10-D30-36	4047438046541	cm	
MOBOTIX CLOUD 3 Yearly Camera Subscription, 10MP/30		cm	
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-HD10-D30-60	4047438046558	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 10MP/30		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD10-D365-12	4047438042376	cm
MOBOTIX CLOUD Yearly Camera Subscription, 10MP/365		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD10-D365-36	4047438046626	cm
I	MOBOTIX CLOUD 3 Yearly Camera Subscription, 10MP/365		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD10-D365-60	4047438046633	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 10MP/365		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l

Mx-CL-Sub-HD10-D60-12	4047438042345	cm
MOBOTIX CLOUD Yearly Camera Subscription, 10MP/60		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



٦			
N	1x-CL-Sub-HD10-D60-36	4047438046565	cm
N	10B0TIX CLOUD 3 Yearly Camera Subscription, 10MP/60		cm
d R d C M	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording uration (retention period): 60 days (automatic deletion afterwards) • Max. esolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile evices (Android and iOS) • Access portal: https://mobotixcloud.com • ancellation/adjustment possible at any time at the end of the subscription period. • lixed billing not possible! • All devices in the sub-account must be switched to nnual billing.	g	cm l



Mx-CL-Sub-HD10-D60-60	4047438046572	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 10MP/60		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD10-D7-12	4047438042314	cm
MOBOTIX CLOUD Yearly Camera Subscription, 10MP/7 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



7	Mx-CL-Sub-HD10-D7-36	4047438046503	cm
	MOBOTIX CLOUD 3 Yearly Camera Subscription, 10MP/7		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD10-D7-60	4047438046510	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 10MP/7		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD10-D730-12	4047438042383	cm
MOBOTIX CLOUD Yearly Camera Subscription, 10MP/730		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD10-D730-36	4047438046640	cm	
MOBOTIX CLOUD 3 Yearly Camera Subscription, 10MP/730		cm	
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-HD10-D730-60	4047438046657	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 10MP/730		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD10-D90-12	4047438042352	cm
MOBOTIX CLOUD Yearly Camera Subscription, 10MP/90		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l

	Mx-CL-Sub-HD10-D90-36	4047438046589	cm
l	MOBOTIX CLOUD 3 Yearly Camera Subscription, 10MP/90		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD10-D90-60	4047438046596	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 10MP/90		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



1	Mx-CL-Sub-HD15-D1095-1	4047438047128	cm
	MOBOTIX CLOUD Monthly Camera Subscription, 15MP/1095		cm
	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



Mx-CL-Sub-HD15-D1095-12 MOBOTIX CLOUD 1 Yearly Camera Subscription, 15MP/1095	4047438047135	cm cm	
1 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-HD15-D1095-36	4047438047142	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 15MP/1095		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D1095-60	4047438047159	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 15MP/1095		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



1	Mx-CL-Sub-HD15-D14-1	4047438046848	cm
	MOBOTIX CLOUD Monthly Camera Subscription, 15MP/14		cm
	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



Mx-CL-Sub-HD15-D14-12	4047438046855	cm
MOBOTIX CLOUD 1 Yearly Camera Subscription, 15MP/14		cm
1 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D14-36 MOBOTIX CLOUD 3 Yearly Camera Subscription, 15MP/14	4047438046862	cm cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D14-60	4047438046879	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 15MP/14		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D180-1	4047438047005	cm
MOBOTIX CLOUD Monthly Camera Subscription, 15MP/180		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max.	g	cm I
Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.		ť



Mx-CL-Sub-HD15-D180-12	4047438047012	cm
MOBOTIX CLOUD 1 Yearly Camera Subscription, 15MP/180		cm
1 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD15-D180-36	4047438047029	cm
I	MOBOTIX CLOUD 3 Yearly Camera Subscription, 15MP/180		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D180-60	4047438047036	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 15MP/180		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D1825-1 4047438047166 c
MOBOTIX CLOUD Monthly Camera Subscription, 15MP/1825
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording g c duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile d devices (Android and iOS) • Access portal: https://mobotixcloud.com • C C Cancellation/adjustment possible at any time at the end of the subscription period. G C



Mx-CL-Sub-HD15-D1825-12 MOBOTIX CLOUD 1 Yearly Camera Subscription, 15MP/1825	4047438047173	cm cm	
1 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-HD15-D1825-36	4047438047180	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 15MP/1825		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D1825-60	4047438047197	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 15MP/1825		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



1	Mx-CL-Sub-HD15-D30-1	4047438046886	cm
	MOBOTIX CLOUD Monthly Camera Subscription, 15MP/30		cm
	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



Mx-CL-Sub-HD15-D30-12	4047438046893	cm
MOBOTIX CLOUD 1 Yearly Camera Subscription, 15MP/30		cm
1 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D30-36 MOBOTIX CLOUD 3 Yearly Camera Subscription, 15MP/30	4047438046909	cm cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D30-60	4047438046916	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 15MP/30		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm ເ



Mx-CL-Sub-HD15-D365-1	4047438047043	cm
MOBOTIX CLOUD Monthly Camera Subscription, 15MP/365		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



Mx-CL-Sub-HD15-D365-12	4047438047050	cm
MOBOTIX CLOUD 1 Yearly Camera Subscription, 15MP/365		cm
1 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



1	Mx-CL-Sub-HD15-D365-36	4047438047067	cm
	MOBOTIX CLOUD 3 Yearly Camera Subscription, 15MP/365		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D365-60	4047438047074	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 15MP/365		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD15-D60-1	4047438046923	cm
L	MOBOTIX CLOUD Monthly Camera Subscription, 15MP/60		cm
	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



Mx-CL-Sub-HD15-D60-12 MOBOTIX CLOUD 1 Yearly Camera Subscription, 15MP/60	4047438046930	cm cm
1 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D60-36	4047438046947	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 15MP/60		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D60-60	4047438046954	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 15MP/60		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



1	Mx-CL-Sub-HD15-D7-1	4047438046800	cm
	MOBOTIX CLOUD Monthly Camera Subscription, 15MP/7		cm
	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



Mx-CL-Sub-HD15-D7-12	4047438046817	cm
MOBOTIX CLOUD 1 Yearly Camera Subscription, 15MP/7		cm
1 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D7-36	4047438046824	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 15MP/7		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: ISMP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! •All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD15-D7-60	4047438046831	cm	
L	MOBOTIX CLOUD 5 Yearly Camera Subscription, 15MP/7		cm	
	5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to	g	cm l	
J	Cancellation/adjustment possible at any time at the end of the subscription period. •			



Mx-CL-Sub-HD15-D730-1	4047438047081	cm
MOBOTIX CLOUD Monthly Camera Subscription, 15MP/730		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



_			
	Mx-CL-Sub-HD15-D730-12	4047438047098	cm
l	MOBOTIX CLOUD 1 Yearly Camera Subscription, 15MP/730		cm
	1 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD15-D730-36	4047438047104	cm
I	MOBOTIX CLOUD 3 Yearly Camera Subscription, 15MP/730		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D730-60	4047438047111	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 15MP/730		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



\	Mx-CL-Sub-HD15-D90-1	4047438046961	cm
I	MOBOTIX CLOUD Monthly Camera Subscription, 15MP/90		cm
	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



Mx-CL-Sub-HD15-D90-12 MOBOTIX CLOUD 1 Yearly Camera Subscription, 15MP/90	4047438046978	cm cm
1 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD15-D90-36	4047438046985	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 15MP/90		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



_			
	Mx-CL-Sub-HD15-D90-60	4047438046992	cm
	MOBOTIX CLOUD 5 Yearly Camera Subscription, 15MP/90		cm
	5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max.	g	cm
	Resolution: 15MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile		ι
	devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. •		
)	Mixed billing not possible! • All devices in the sub-account must be switched to		
	annual billing.		



	Mx-CL-Sub-HD2-D1095-12	4047438041843	cm
L	MOBOTIX CLOUD Yearly Camera Subscription, 1080p/1095		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Antroid and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D1095-36	4047438045865	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 1080p/1095		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D1095-60 MOBOTIX CLOUD 5 Yearly Camera Subscription, 1080p/1095	4047438045872	cm cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D14-12	4047438041775	cm	
MOBOTIX CLOUD Yearly Camera Subscription, 1080p/14		cm	
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 10800 • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-HD2-D14-36	4047438045728	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 1080p/14		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D14-60	4047438045735	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 1080p/14		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l

	Mx-CL-Sub-HD2-D180-12	4047438041812	cm
L	MOBOTIX CLOUD Yearly Camera Subscription, 1080p/180		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D180-36	4047438045803	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 1080p/180		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D180-60 MOBOTIX CLOUD 5 Yearly Camera Subscription, 1080p/180	4047438045810	cm cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D1825-12	4047438041850	cm
MOBOTIX CLOUD Yearly Camera Subscription, 1080p/1825		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 10800 • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D1825-36	4047438045889	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 1080p/1825		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D1825-60	4047438045896	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 1080p/1825		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD2-D30-12	4047438041782	cm
l	MOBOTIX CLOUD Yearly Camera Subscription, 1080p/30		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 10800 • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D30-36	4047438045742	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 1080p/30		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D30-60 MOBOTIX CLOUD 5 Yearly Camera Subscription, 1080p/30	4047438045759	cm cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D365-12 MOBOTIX CLOUD Yearly Camera Subscription, 1080p/365	4047438041829	cm cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 10800 • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D365-36	4047438045827	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 1080p/365		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D365-60	4047438045834	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 1080p/365		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD2-D60-12	4047438041799	cm
L	MOBOTIX CLOUD Yearly Camera Subscription, 1080p/60		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



]	Mx-CL-Sub-HD2-D60-36	4047438045766	cm
	MOBOTIX CLOUD 3 Yearly Camera Subscription, 1080p/60		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D60-60 MOBOTIX CLOUD 5 Yearly Camera Subscription, 1080p/60	4047438045773	cm cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 10800 • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD2-D7-12	4047438041768	cm	
L	MOBOTIX CLOUD Yearly Camera Subscription, 1080p/7 Days		cm	
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-HD2-D7-36	4047438045704	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 108	30p/7	cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD + duration (retention period): 2/3/5 up to 7 days (automatic deletion after Max. Resolution: 1080p - Free use of the MOBOTIX CLOUD app for deskto mobile devices (Android and iOS) - Access portal: https://mobotixcloud. Cancellation/adjustment possible at any time at the end of the subscript Mixed billing not possible! - All devices in the sub-account must be switc annual billing.	wards) • op PC and com • tion period. •	cm l



	Mx-CL-Sub-HD2-D7-60	4047438045711	cm
	MOBOTIX CLOUD 5 Yearly Camera Subscription, 1080p/7		cm
,	5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD2-D730-12	4047438041836	cm
L	MOBOTIX CLOUD Yearly Camera Subscription, 1080p/730		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D730-36	4047438045841	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 1080p/730		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HI	D2-D730-60	4047438045858	cm
MOBOTIX CLC	DUD 5 Yearly Camera Subscription, 1080p/730		cm
duration (retention Resolution: 1080p devices (Android an Cancellation/adjus	on for using a single camera in the MOBOTIX CLOUD • Recording n period): 730 days (automatic deletion afterwards) • Max. • Free use of the MOBOTIX CLOUD app for desktop PC and mobile nd iOS) • Access portal: https://mobotixcloud.com • tment possible at any time at the end of the subscription period. • ossible! • All devices in the sub-account must be switched to	g	cm l



Mx-CL-Sub-HD2-D90-12	4047438041805	cm
MOBOTIX CLOUD Yearly Camera Subscription, 1080p/90		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 10800 • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D90-36	4047438045780	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 1080p/90		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD2-D90-60	4047438045797	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 1080p/90		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 1080p • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •	g	cm l
Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



	Mx-CL-Sub-HD3-D1095-12	4047438041942	cm
L	MOBOTIX CLOUD Yearly Camera Subscription, 3MP/1095		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D1095-36	4047438046060	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 3MP/1095		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D1095-60	4047438046077	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 3MP/1095		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D14-12	4047438041874	cm
MOBOTIX CLOUD Yearly Camera Subscription, 3MP/14 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D14-36	4047438045926	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 3MP/14		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and IOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D14-60	4047438045933	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 3MP/14		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max.	g	cm
Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



	Mx-CL-Sub-HD3-D180-12	4047438041911	cm
L	MOBOTIX CLOUD Yearly Camera Subscription, 3MP/180		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D180-36	4047438046008	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 3MP/180		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D180-60 MOBOTIX CLOUD 5 Yearly Camera Subscription, 3MP/180	4047438046015	cm cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D1825-12	4047438041959	cm
MOBOTIX CLOUD Yearly Camera Subscription, 3MP/1825		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D1825-36	4047438046084	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 3MP/1825		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



_			
	Mx-CL-Sub-HD3-D1825-60	4047438046091	cm
l	MOBOTIX CLOUD 5 Yearly Camera Subscription, 3MP/1825		cm
l	5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording	g	cm
l	duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile		ι
L	devices (Android and iOS) • Access portal: https://mobotixcloud.com •		
	Cancellation/adjustment possible at any time at the end of the subscription period.		
/	Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



	Mx-CL-Sub-HD3-D30-12	4047438041881	cm
I	MOBOTIX CLOUD Yearly Camera Subscription, 3MP/30 Days		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and IOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D30-36	4047438045940	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 3MP/30		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D30-60 MOBOTIX CLOUD 5 Yearly Camera Subscription, 3MP/30	4047438045957	cm cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D365-12	4047438041928	cm
MOBOTIX CLOUD Yearly Camera Subscription, 3MP/365		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D365-36	4047438046022	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 3MP/365		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD3-D365-60	4047438046039	cm
l	MOBOTIX CLOUD 5 Yearly Camera Subscription, 3MP/365		cm
	5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max.	g	cm
	Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
J	Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to		
	annual billing.		



	Mx-CL-Sub-HD3-D60-12	4047438041898	cm
I	MOBOTIX CLOUD Yearly Camera Subscription, 3MP/60 Days		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max.	g	cm
	Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
	Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to		
	annual billing.		



Mx-CL-Sub-HD3-D60-36	4047438045964	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 3MP/60		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D60-60	4047438045971	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 3MP/60		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD3-D7-12	4047438041867	cm
L	MOBOTIX CLOUD Yearly Camera Subscription, 3MP/7 Days		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! •All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D7-36	4047438045902	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 3MP/7 Days		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and IOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D7-60	4047438045919	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 3MP/7 Days		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! •All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD3-D730-12	4047438041935	cm
L	MOBOTIX CLOUD Yearly Camera Subscription, 3MP/730		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D730-36	4047438046046	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 3MP/730		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D730-60 MOBOTIX CLOUD 5 Yearly Camera Subscription, 3MP/730	4047438046053	cm cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D90-12	4047438041904	cm
MOBOTIX CLOUD Yearly Camera Subscription, 3MP/90 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Antoria and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D90-36	4047438045988	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 3MP/90		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD3-D90-60	4047438045995	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 3MP/90		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max.	g	cm
Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to		
annual billing.		



	Mx-CL-Sub-HD4-D1095-12	4047438042192	cm
	MOBOTIX CLOUD Yearly Camera Subscription, 4MP/1095		cm
,	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D1095-36	4047438046268	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 4MP/1095		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D1095-60	4047438046275	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 4MP/1095		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D14-12	4047438042123	cm
MOBOTIX CLOUD Yearly Camera Subscription, 4MP/14 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D14-36	4047438046121	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 4MP/14		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD4-D14-60	4047438046138	cm
l	MOBOTIX CLOUD 5 Yearly Camera Subscription, 4MP/14		cm
	5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max.	g	cm
	Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
J	Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to		
	annual billing.		

	Mx-CL-Sub-HD4-D180-12	4047438042161	cm
	MOBOTIX CLOUD Yearly Camera Subscription, 4MP/180		cm
,	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D180-36	4047438046206	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 4MP/180		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D180-60 MOBOTIX CLOUD 5 Yearly Camera Subscription, 4MP/180	4047438046213	cm cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D1825-12	4047438042208	cm	
MOBOTIX CLOUD Yearly Camera Subscription, 4MP/1825		cm	
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-HD4-D1825-36	4047438046282	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 4MP/1825		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



_			
	Mx-CL-Sub-HD4-D1825-60	4047438046299	cm
l	MOBOTIX CLOUD 5 Yearly Camera Subscription, 4MP/1825		cm
l	5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max.	g	cm
l	Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile		l
l	devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. •		
)	Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



	Mx-CL-Sub-HD4-D30-12	4047438042130	cm
I	MOBOTIX CLOUD Yearly Camera Subscription, 4MP/30 Days		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Antoria and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D30-36	4047438046145	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 4MP/30		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D30-60 MOBOTIX CLOUD 5 Yearly Camera Subscription, 4MP/30	4047438046152	cm cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D365-12	4047438042178	cm
MOBOTIX CLOUD Yearly Camera Subscription, 4MP/365		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D365-36	4047438046220	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 4MP/365		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D365-60	4047438046237	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 4MP/365		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max.	g	cm I
Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. •		
Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



	Mx-CL-Sub-HD4-D60-12	4047438042147	cm
l	MOBOTIX CLOUD Yearly Camera Subscription, 4MP/60 Days		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile	g	cm l
J	devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



Mx-CL-Sub-HD4-D60-36	4047438046169	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 4MP/60		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D60-60 MOBOTIX CLOUD 5 Yearly Camera Subscription, 4MP/60	4047438046176	cm cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD4-D7-12	4047438042116	cm
L	MOBOTIX CLOUD Yearly Camera Subscription, 4MP/7 Days		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! •All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D7-36	4047438046107	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 4MP/7 Days		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D7-60	4047438046114	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 4MP/7 Days		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-HD4-D730-12	4047438042185	cm
	MOBOTIX CLOUD Yearly Camera Subscription, 4MP/730		cm
,	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



]	Mx-CL-Sub-HD4-D730-36	4047438046244	cm
	MOBOTIX CLOUD 3 Yearly Camera Subscription, 4MP/730		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	x-CL-Sub-HD4-D730-60 OBOTIX CLOUD 5 Yearly Camera Subscription, 4MP/730	4047438046251	cm cm
du Re de Ca Miz	(early subscription for using a single camera in the MOBOTIX CLOUD • Recording iration (retention period): 730 days (automatic deletion afterwards) • Max. isolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile vices (Android and iOS) • Access portal: https://mobotixcloud.com • incellation/adjustment possible at any time at the end of the subscription period. • xed billing not possible! • All devices in the sub-account must be switched to inual billing.	g	cm l



Mx-CL-Sub-HD4-D90-12	4047438042154	cm
MOBOTIX CLOUD Yearly Camera Subscription, 4MP/90 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D90-36	4047438046183	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 4MP/90		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD4-D90-60	4047438046190	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 4MP/90		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max.	g	cm
Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
Cancellation/adjustment possible at any time at the end of the subscription period. •		
Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



	Mx-CL-Sub-HD5-D1095-12	4047438042291	cm
L	MOBOTIX CLOUD Yearly Camera Subscription, 5MP/1095		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: SMP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D1095-36	4047438046466	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 5MP/1095		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D1095-60	4047438046473	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 5MP/1095		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D14-12	4047438042222	cm
MOBOTIX CLOUD Yearly Camera Subscription, 5MP/14 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: SMP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D14-36	4047438046329	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 5MP/14		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D14-60	4047438046336	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 5MP/14		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max.	g	cm
Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. •		l
Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



	Mx-CL-Sub-HD5-D180-12	4047438042260	cm
L	MOBOTIX CLOUD Yearly Camera Subscription, 5MP/180		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: SMP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D180-36	4047438046404	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 5MP/180		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D180-60	4047438046411	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 5MP	/ 180	cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Re duration (retention period): 180 days (automatic deletion afterwards) • Ma Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscriptic Mixed billing not possible! • All devices in the sub-account must be switche annual billing.	x. mobile n period.•	cm l



Mx-CL-Sub-HD5-D1825-12	4047438042307	cm	
MOBOTIX CLOUD Yearly Camera Subscription, 5MP/1825		cm	
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-HD5-D1825-36	4047438046480	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 5MP/1825		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



_			
	Mx-CL-Sub-HD5-D1825-60	4047438046497	cm
L	MOBOTIX CLOUD 5 Yearly Camera Subscription, 5MP/1825		cm
L	5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording	g	cm
L	duration (retention period): 1825 days (automatic deletion afterwards) • Max.		
L	Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile		ι
L	devices (Android and iOS) • Access portal: https://mobotixcloud.com •		
L	Cancellation/adjustment possible at any time at the end of the subscription period.		
J	Mixed billing not possible! • All devices in the sub-account must be switched to		
	annual billing.		



	Mx-CL-Sub-HD5-D30-12	4047438042239	cm
I	MOBOTIX CLOUD Yearly Camera Subscription, 5MP/30 Days		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. •	g	cm l
/	Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



Mx-CL-Sub-HD5-D30-36	4047438046343	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 5MP/30		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D30-60 MOBOTIX CLOUD 5 Yearly Camera Subscription, 5MP/30	4047438046350	cm cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D365-12	4047438042277	cm
MOBOTIX CLOUD Yearly Camera Subscription, 5MP/365		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D365-36	4047438046428	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 5MP/365		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D365-60	4047438046435	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 5MP/365		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max.	g	cm
Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to		
annual billing.		



	Mx-CL-Sub-HD5-D60-12	4047438042246	cm
l	MOBOTIX CLOUD Yearly Camera Subscription, 5MP/60 Days		cm
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max.	g	cm
l	Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
	Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to		
	annual billing.		



Mx-CL-Sub-HD5-D60-36	4047438046367	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 5MP/60		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D60-60 MOBOTIX CLOUD 5 Yearly Camera Subscription, 5MP/60	4047438046374	cm cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription perio Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	2	cm l



	Mx-CL-Sub-HD5-D7-12	4047438042215	cm	
l	MOBOTIX CLOUD Yearly Camera Subscription, 5MP/7 Days		cm	
	Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •	g	cm l	
J	Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.			



Mx-CL-Sub-HD5-D7-36	4047438046305	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 5MP/7 Days		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: SMP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



_			
	Mx-CL-Sub-HD5-D7-60	4047438046312	cm
	MOBOTIX CLOUD 5 Yearly Camera Subscription, 5MP/7 Days		cm
v	5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: SMP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! •All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D730-12	4047438042284	cm
MOBOTIX CLOUD Yearly Camera Subscription, 5MP/730		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile	g	cm l
devices (Android and iOS) • Access portal: https://mobotic.loud.com • Cancellation/adjustment possible at any time at the end of the subscription period. •		
Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



1	Mx-CL-Sub-HD5-D730-36	4047438046442	cm
1	MOBOTIX CLOUD 3 Yearly Camera Subscription, 5MP/730		cm
C F C C	B Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile Jevices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D730-60 MOBOTIX CLOUD 5 Yearly Camera Subscription, 5MP/730	4047438046459	cm cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D90-12	4047438042253	cm
MOBOTIX CLOUD Yearly Camera Subscription, 5MP/90 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D90-36	4047438046381	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, 5MP/90		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-HD5-D90-60	4047438046398	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, 5MP/90		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max.	g	cm
Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
Cancellation/adjustment possible at any time at the end of the subscription period. •		
Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



1	Mx-CL-Sub-M10-1	4047438040327	cm
	MOBOTIX CLOUD Camera license, only live stream, NO		cm
	Monthly subscription for using a single camera in the MOBOTIX CLOUD •Only for Live streaming • Recording duration (retention period): 0 days (No recording) • Max. Resolution: freely selectable • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-M10-12	4047438042482	cm
MOBOTIX CLOUD 1Y Camera Subscription, only Live, NO		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Only for Live streaming • Recording duration (retention period): 0 days (No recording) • Max. Resolution: freely selectable • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the year • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



1		
Mx-CL-Sub-M10-36	4047438045278	cm
MOBOTIX CLOUD 3Y Camera Subscription, only Live, NO		cm
3 Years subscription for using a single camera in the MOBOTIX CLOUD • Only for Live streaming • Recording duration (retention period): 0 days (No recording) • Max. Resolution: freely selectable • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the year • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-M10-60	4047438045285	cm	
MOBOTIX CLOUD 5Y Camera Subscription, only Live, NO		cm	
5 Years subscription for using a single camera in the MOBOTIX CLOUD • Only for Live streaming • Recording duration (retention period): 0 days (No recording) • Max. Resolution: freely selectable • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the year • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-PR1-D180-1	4047438049146	cm
MOBOTIX CLOUD monthly Camera Subscription, for preview		cm
Monthly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



	Mx-CL-Sub-PR1-D180-12	4047438049153	cm
	MOBOTIX CLOUD 1 Yearly Camera Subscription, for preview		cm
,	1 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-PR1-D180-36	4047438049160	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, for preview		cm
3 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-PR1-D180-60 MOBOTIX CLOUD 5 Yearly Camera Subscription, for preview	4047438049177	cm cm
5 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-PR1-D30-1	4047438049023	cm
L	MOBOTIX CLOUD monthly Camera Subscription for preview		cm
	Monthly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



Mx-CL-Sub-PR1-D30-12 MOBOTIX CLOUD 1 Yearly Camera Subscription, for preview	4047438049030	cm cm
1 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotix.cloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-PR1-D30-36	4047438049047	cm	
MOBOTIX CLOUD 3 Yearly Camera Subscription, for preview		cm	
3 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



1	Mx-CL-Sub-PR1-D30-60	4047438049054	cm
	MOBOTIX CLOUD 5 Yearly Camera Subscription, for preview		cm
	5 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l

Mx-CL-Sub-PR1-D365-1	4047438049184	cm
MOBOTIX CLOUD monthly Camera Subscription, for preview		cm
Monthly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



_			
	Mx-CL-Sub-PR1-D365-12	4047438049191	cm
	MOBOTIX CLOUD 1 Yearly Camera Subscription, for preview		cm
	1 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-PR1-D365-36	4047438049207	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, for preview		cm
3 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-PR1-D365-60	4047438049214	cm
I	MOBOTIX CLOUD 5 Yearly Camera Subscription, for preview		cm
	5 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-PR1-D60-1	4047438049061		cm
MOBOTIX CLOUD monthly Camera Subscription, for preview			cm
Monthly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	1	cm l



1	Mx-CL-Sub-PR1-D60-12	4047438049078	cm
	MOBOTIX CLOUD 1 Yearly Camera Subscription, for preview		cm
	1 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l

Mx-CL-Sub-PR1-D60-36	4047438049085	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, for preview		cm
3 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l

|--|--|--|

٦			
	Mx-CL-Sub-PR1-D60-60	4047438049092	cm
	MOBOTIX CLOUD 5 Yearly Camera Subscription, for preview		cm
	5 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



J	Mx-CL-Sub-PR1-D730-1 MOBOTIX CLOUD monthly Camera Subscription,for preview	4047438049221	cm cm
	Monthly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l



Mx-CL-Sub-PR1-D730-12 MOBOTIX CLOUD 1 Yearly Camera Subscription, for preview	4047438049238	cm cm
1 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-PR1-D730-36	4047438049245	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, for preview		cm
3 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-PR1-D730-60	4047438049252	cm
L	MOBOTIX CLOUD 5 Yearly Camera Subscription, for preview		cm
	5 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l

Mx-CL-Sub-PR1-D90-1	4047438049108	cm
MOBOTIX CLOUD monthly Camera Subscription, for preview		cm
Monthly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period.	g	cm l

|--|

Mx-CL-Sub-PR1-D90-12	4047438049115	cm
MOBOTIX CLOUD 1 Yearly Camera Subscription, for preview		cm
1 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-PR1-D90-36	4047438049122	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, for preview		cm
3 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-PR1-D90-60	4047438049139	cm
I	MOBOTIX CLOUD 5 Yearly Camera Subscription, for preview		cm
	5 Yearly subscription for recording the Preview Stream with 1 fps from a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: Preview setting in the Cloud • Requires a Cloud Managed Video Recorder (CMVR) • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https: //mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-SD1-D1095-12	4047438042048	cm	
MOBOTIX CLOUD Yearly Camera Subscription, VGA/1095		cm	
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



1	Mx-CL-Sub-SD1-D1095-36	4047438045469	cm
	MOBOTIX CLOUD 3 Yearly Camera Subscription, VGA/1095		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l

Mx-CL-Sub-SD1-D1095-60	4047438045476	cm
MOBOTIX CLOUD 5 Yearly Camera Subscription, VGA/1095		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-SD1-D14-12 MOBOTIX CLOUD Yearly Camera Subscription, VGA/14 Days	4047438041973	cm cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l

All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX • 24.01.2025 • MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025



Mx-CL-Sub-SD1-D14-36 MOBOTIX CLOUD 3 Yearly Camera Subscription, VGA/14	4047438045315	cm cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



м	x-CL-Sub-SD1-D14-60	4047438045322	cm
М	OBOTIX CLOUD 5 Yearly Camera Subscription, VGA/14		cm
du Re de Ca Mi	early subscription for using a single camera in the MOBOTIX CLOUD • Recording ration (retention period): 14 days (automatic deletion afterwards) • Max. solution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile vices (Android and iOS) • Access portal: https://mobotixcloud.com • ncellation/adjustment possible at any time at the end of the subscription period. • wed billing not possible! • All devices in the sub-account must be switched to nual billing.	g	cm l



Mx-CL-Sub-SD1-D180-12	4047438042017	cm
MOBOTIX CLOUD Yearly Camera Subscription, VGA/180 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-SD1-D180-36	4047438045407	cm
l	MOBOTIX CLOUD 3 Yearly Camera Subscription, VGA/180		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to	g	cm l
	annual billing.		



	Mx-CL-Sub-SD1-D180-60	4047438045414	cm
L	MOBOTIX CLOUD 5 Yearly Camera Subscription, VGA/180		cm
	5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-SD1-D1825-12	4047438042055	cm
MOBOTIX CLOUD Yearly Camera Subscription, VGA/1825		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-SD1-D1825-36 MOBOTIX CLOUD 3 Yearly Camera Subscription, VGA/1825	4047438045483	cm cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-SD1-D1825-60	4047438045490	cm	
MOBOTIX CLOUD 5 Yearly Camera Subscription, VGA/1825		cm	
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-SD1-D30-12	4047438041980	cm
MOBOTIX CLOUD Yearly Camera Subscription, VGA/30 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-SD1-D30-36	4047438045339	cm
MOBOTIX CLOUD 3 Yearly Camera Subscription, VGA/30		cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max.	g	cm
Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Conselled to fail the sector of th		l
Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



	Mx-CL-Sub-SD1-D30-60	4047438045346	cm
L	MOBOTIX CLOUD 5 Yearly Camera Subscription, VGA/30		cm
	5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l





Mx-CL-Sub-SD1-D365-36 MOBOTIX CLOUD 3 Yearly Camera Subscription, VGA/365	4047438045421	cm cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-SD1-D365-60	4047438045438	cm	
MOBOTIX CLOUD 5 Yearly Camera Subscription, VGA/365		cm	
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-SD1-D60-12	4047438041997	cm
MOBOTIX CLOUD Yearly Camera Subscription, VGA/60 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-SD1-D60-36	4047438045360	cm
l	MOBOTIX CLOUD 3 Yearly Camera Subscription, VGA/60		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max.	g	cm
	Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
	Cancellation/adjustment possible at any time at the end of the subscription period.		
/	Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



	Mx-CL-Sub-SD1-D60-60	4047438045377	cm
L	MOBOTIX CLOUD 5 Yearly Camera Subscription, VGA/60		cm
	5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-SD1-D7-12	4047438041966	cm
MOBOTIX CLOUD Yearly Camera Subscription, VGA/7 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-SD1-D7-36 MOBOTIX CLOUD 3 Years Camera Subscription, VGA/7 Days	4047438045292	cm cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-SD1-D7-60	4047438045308	cm
MOBOTIX CLOUD 5 Years Camera Subscription, VGA/7 Days		cm
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and	g	cm l
max, resolution: voa • ree use of the MOBOTA CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! All devices in the sub-account must be switched to		
annual billing.		



Mx-CL-Sub-SD1-D730-12	4047438042031	cm
MOBOTIX CLOUD Yearly Camera Subscription, VGA/730 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



	Mx-CL-Sub-SD1-D730-36	4047438045445	cm
l	MOBOTIX CLOUD 3 Yearly Camera Subscription, VGA/730		cm
	3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max.	g	cm
	Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •		l
J	Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.		



	Mx-CL-Sub-SD1-D730-60	4047438045452	cm
L	MOBOTIX CLOUD 5 Yearly Camera Subscription, VGA/730		cm
	5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-SD1-D90-12	4047438042000	cm
MOBOTIX CLOUD Yearly Camera Subscription, VGA/90 Days		cm
Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l

	\bigcirc
	\bigcirc
L	

Mx-CL-Sub-SD1-D90-36 MOBOTIX CLOUD 3 Yearly Camera Subscription, VGA/90	4047438045384	cm cm
3 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l



Mx-CL-Sub-SD1-D90-60	4047438045391	cm	
MOBOTIX CLOUD 5 Yearly Camera Subscription, VGA/90		cm	
5 Yearly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period. • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing.	g	cm l	



Mx-CL-Sub-SP01-M30-1	4047438047203	cm
MOBOTIX CLOUD Monthly SIP Audio-Support Subscription		cm
Monthly Subscription for using a single IP SIP based speaker/Intercom in the MOBOTIX CLOUD • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period	g	cm l



Mx-CL-Sub-SP01-M30-12	4047438047210	cm
MOBOTIX CLOUD Yearly SIP Audio-Support Subscription	n	cm
Yearly subscription for using a single IP SIP based speaker/Intercom in the MC CLOUD • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devi (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription p Mixed billing not possible! • All devices in the sub-account must be switched to annual billing	ices operiod •	cm l



	Mx-CL-Sub-SP01-M30-36	4047438047227	cm
L	MOBOTIX CLOUD 3 Yearly SIP Audio-Support Subscription		cm
	3 Yearly subscription for using a single IP SIP based speaker/Intercom in the MOBOTIX CLOUD • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing	g	cm l



Mx-CL-Sub-SP01-M30-60	4047438047234	cm
MOBOTIX CLOUD 5 Yearly SIP Audio-Support Subscription		cm
5 Yearly subscription for using a single IP SIP based speaker/Intercom in the MOBOTIX CLOUD • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment possible at any time at the end of the subscription period • Mixed billing not possible! • All devices in the sub-account must be switched to annual billing	g	cm l



Mx-CL-Sub-SD1-D7-1 MOBOTIX CLOUD Camera Subscription, VGA/7 Days	4047438036375	cm cm	
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l	



Mx-CL-Sub-SD1-D14-1	4047438036382	cm
MOBOTIX CLOUD Camera Subscription, VGA/14 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Rec duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and n devices (Android and iOS) • MOBOTIX CLoud access portal: https://mobotixc com • Cancellation/adjustment of subscription possible at any time at the e month	nobile cloud.	cm l



Mx-CL-Sub-SD1-D30-1	4047438036399	cm
MOBOTIX CLOUD Camera Subscription, VGA/30 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-SD1-D60-1	4047438036405	cm
MOBOTIX CLOUD Camera Subscription, VGA/60 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-SD1-D90-1	4047438036412	cm
MOBOTIX CLOUD Camera Subscription, VGA/90 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-SD1-D180-1	4047438036429	cm
MOBOTIX CLOUD Camera Subscription, VGA/180 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-SD1-D365-1 4047438036436 cm MOBOTIX CLOUD Camera Subscription, VGA/365 Days cm Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording g cm Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording g cm duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile l devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the	_		
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording g cm duration (retention period): 365 days (automatic deletion afterwards) • Max. l l Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • l	Mx-CL-Sub-SD1-D365-1	4047438036436	cm
duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •	MOBOTIX CLOUD Camera Subscription, VGA/365 Days		cm
	duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and m devices (Android and iOS) • Access portal: https://mobotixcloud.com •	obile	cm l



Mx-CL-Sub-SD1-D730-1	4047438036443	cm
MOBOTIX CLOUD Camera Subscription, VGA/730 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-SD1-D1095-1	4047438036450	cm
MOBOTIX CLOUD Camera Subscription, VGA/1095 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



	Mx-CL-Sub-SD1-D1825-1	4047438036467	cm
	MOBOTIX CLOUD Camera Subscription, VGA/1825 Days		cm
,	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: VGA • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



	Mx-CL-Sub-HD1-D7-1	4047438036023	cm
L	MOBOTIX CLOUD Camera Subscription, 720p/7 Days		cm
ļ	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 720 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD1-D14-1	4047438036030	cm
MOBOTIX CLOUD Camera Subscription, 720p/14 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 720 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



_			
	Mx-CL-Sub-HD1-D30-1	4047438036047	cm
	MOBOTIX CLOUD Camera Subscription, 720p/30 Days		cm
	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 720 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD1-D60-1	4047438036054	cm
MOBOTIX CLOUD Camera Subscription, 720p/60 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 720 pixels • Free use of the MOBOTIX CLOUD ap for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD1-D90-1	4047438036061	cm
MOBOTIX CLOUD Camera Subscription, 720p/90 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 720 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD1-D180-1	4047438036078	cm
MOBOTIX CLOUD Camera Subscription, 720p/180 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 720 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



	Mx-CL-Sub-HD1-D365-1	4047438036085	cm
L	MOBOTIX CLOUD Camera Subscription, 720p/365 Days		cm
	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 720 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD1-D730-1	4047438036092	cm
MOBOTIX CLOUD Camera Subscription, 720p/730 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 720 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



)	Mx-CL-Sub-HD1-D1095-1 MOBOTIX CLOUD Camera Subscription, 720p/1095 Days	4047438036108	cm cm	
	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 720 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l	



Mx-CL-Sub-HD1-D1825-1	4047438036115	cm	
MOBOTIX CLOUD Camera Subscription, 720p/1825 Days		cm	
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 720 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l	



Mx-CL-Sub-HD2-D7-1	4047438036122	cm
MOBOTIX CLOUD Camera Subscription, 1080p/7 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 1080 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD2-D14-1	4047438036139	cm
MOBOTIX CLOUD Camera Subscription, 1080p/14 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 1080 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD2-D30-1	4047438036146	cm
MOBOTIX CLOUD Camera Subscription, 1080p/30 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 1080 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD2-D60-1	4047438036153	cm
MOBOTIX CLOUD Camera Subscription, 1080p/60 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 1080 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD2-D90-1 MOBOTIX CLOUD Camera Subscription, 1080p/90 Days	4047438036160	cm cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 1080 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD2-D180-1	4047438036177	cm
MOBOTIX CLOUD Camera Subscription, 1080p/180 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 1080 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD2-D365-1	4047438036184	cm
MOBOTIX CLOUD Camera Subscription, 1080p/365 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 1080 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD2-D730-1	4047438036191	cm
MOBOTIX CLOUD Camera Subscription, 1080p/730 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 1080 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



	Mx-CL-Sub-HD2-D1095-1	4047438036207	cm
I	MOBOTIX CLOUD Camera Subscription, 1080p/1095 Days		cm
	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 1080 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD2-D1825-1	4047438036214	cm
MOBOTIX CLOUD Camera Subscription, 1080p/1825 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 1080 pixels • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l

Mx-CL-Sub-HD3-D7-1 MOBOTIX CLOUD Camera Subscription, 3MP/7 Days	4047438036221	cm cm	
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l	



Mx-CL-Sub-HD3-D14-1 404 MOBOTIX CLOUD Camera Subscription, 3MP/14 Days	7438036238 cr	
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the	g cr l	



Mx-CL-Sub-HD3-D30-1	4047438036245	cm
MOBOTIX CLOUD Camera Subscription, 3MP/30 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD3-D60-1	4047438036252	cm
MOBOTIX CLOUD Camera Subscription, 3MP/60 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD3-D90-1	4047438036269	cm
MOBOTIX CLOUD Camera Subscription, 3MP/90 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD3-D180-1	4047438036276	cm
MOBOTIX CLOUD Camera Subscription, 3MP/180 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l

MOBO	VITC
MODU	אווע

ſ	\bigcirc
l	

Mx-CL-Sub-HD3-D365-1	4047438036283	cm
MOBOTIX CLOUD Camera Subscription, 3MP/365 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD3-D730-1		4047438036290	cm
MOBOTIX CLOUD Camera Subscri	ption, 3MP/730 Days		cm
Monthly subscription for using a single camera duration (retention period): 730 days (automat Resolution: 3MP • Free use of the MOBOTIX CLO devices (Android and iOS) • MOBOTIX CLoud ac com • Cancellation/adjustment of subscription month	tic deletion afterwards) • Max. DUD app for desktop PC and mobile ccess portal: https://mobotixcloud.	g	cm l



Mx-CL-Sub-HD3-D1095-1	4047438036306	cm
MOBOTIX CLOUD Camera Subscription, 3MP/1095 Days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



	Mx-CL-Sub-HD3-D1825-1	4047438036313	cm
	MOBOTIX CLOUD Camera Subscription, 3MP/1825 Days		cm
,	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 3MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



	Mx-CL-Sub-HD4-D7-1	4047438036481	cm
L	MOBOTIX CLOUD Camera Subscription, 4MP/7 days		cm
	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD4-D14-1	4047438036498	cm
MOBOTIX CLOUD Camera Subscription, 4MP/14 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



_			
	Mx-CL-Sub-HD4-D30-1	4047438036504	cm
	MOBOTIX CLOUD Camera Subscription, 4MP/30 days		cm
	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the	g	cm l
	month		



-		
Mx-CL-Sub-HD4-D60-1	4047438036511	cm
MOBOTIX CLOUD Camera Subscription, 4MP/60 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD4-D90-1	4047438036528	cm
MOBOTIX CLOUD Camera Subscription, 4MP/90 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD4-D180-1	4047438036535	cm
MOBOTIX CLOUD Camera Subscription, 4MP/180 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



	Mx-CL-Sub-HD4-D365-1	4047438036542	cm
	MOBOTIX CLOUD Camera Subscription, 4MP/365 days		cm
,	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD4-D730-1	4047438036559	cm
MOBOTIX CLOUD Camera Subscription, 4MP/730 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD4-D1095-1 4047438036566 cm MOBOTIX CLOUD Camera Subscription, 4MP/1095 days cm Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. g cm Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • l	_			
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording g cm duration (retention period): 1095 days (automatic deletion afterwards) • Max. l Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile l devices (Android and iOS) • Access portal: https://mobotixcloud.com • •		Mx-CL-Sub-HD4-D1095-1	4047438036566	cm
duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •	l	MOBOTIX CLOUD Camera Subscription, 4MP/1095 days		cm
		duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile	g	cm l



_			
	Mx-CL-Sub-HD4-D1825-1	4047438036573	cm
	MOBOTIX CLOUD Camera Subscription, 4MP/1825 days		cm
	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 4MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD5-D7-1	4047438036580	cm
MOBOTIX CLOUD Camera Subscription, 5MP/7 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: SMP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD5-D14-1	4047438036597	cm
MOBOTIX CLOUD Camera Subscription, 5MP/14 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 14 days (automatic deletion afterwards) • Max. Resolution: SMP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD5-D30-1	4047438036603	cm
MOBOTIX CLOUD Camera Subscription, 5MP/30 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: SMP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD5-D60-1	4047438036610	cm
MOBOTIX CLOUD Camera Subscription, 5MP/60 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD5-D90-1	4047438036627	cm
MOBOTIX CLOUD Camera Subscription, 5MP/90 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: SMP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the	g	cm l
month		



Mx-CL-Sub-HD5-D180-1	4047438036634	cm
MOBOTIX CLOUD Camera Subscription, 5MP/180 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: SMP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD5-D365-1	4047438036641	cm
MOBOTIX CLOUD Camera Subscription, 5MP/365 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: SMP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD5-D730-1	4047438036658	cm
MOBOTIX CLOUD Camera Subscription, 5MP/730 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: SMP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD5-D1095-1	4047438036665	cm
MOBOTIX CLOUD Camera Subscription, 5MP/1095 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: SMP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD5-D1825-1	4047438036672	cm
MOBOTIX CLOUD Camera Subscription, 5MP/1825 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 5MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD10-D7-1 MOBOTIX CLOUD Camera Subscription, 10MP/7 days	4047438036689	cm cm	
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 2/3/5 up to 7 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l	



-			
Mx-CL-Sub-HD10-D14-1		4047438036696	cm
MOBOTIX CLOUD Camera	Subscription, 10MP/14 days		cm
duration (retention period): 14 days Resolution: 10MP • Free use of the M devices (Android and iOS) • Access p	gle camera in the MOBOTIX CLOUD • Recording (automatic deletion afterwards) • Max. OBOTIX CLOUD app for desktop PC and mobile ortal: https://mobotixcloud.com • tion possible at any time at the end of the	g	cm l



Mx-CL-Sub-HD10-D30-1	4047438036702	cm
MOBOTIX CLOUD Camera Subscription, 10MP/30 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 30 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD10-D60-1	4047438036719	cm
MOBOTIX CLOUD Camera Subscription, 10MP/60 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 60 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



	Mx-CL-Sub-HD10-D90-1	4047438036726	cm
	MOBOTIX CLOUD Camera Subscription, 10MP/90 days		cm
,	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 90 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD10-D180-1	4047438036733	cm
MOBOTIX CLOUD Camera Subscription, 10MP/180 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 180 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD10-D365-1 4047438036740 cm MOBOTIX CLOUD Camera Subscription, 10MP/365 days cm Monthly subscription for using a single camera in the MOBOTIX CLOUD - Recording duration (retention period): 365 days (automatic deletion afterwards) • Max. g cm Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile l l			
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording g cm duration (retention period): 365 days (automatic deletion afterwards) • Max.	Mx-CL-Sub-HD10-D365-1	4047438036740	cm
duration (retention period): 365 days (automatic deletion afterwards) • Max.	MOBOTIX CLOUD Camera Subscription, 10MP/365 days		cm
devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the	duration (retention period): 365 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com •	g	cm l



_			
	Mx-CL-Sub-HD10-D730-1	4047438036757	cm
	MOBOTIX CLOUD Camera Subscription, 10MP/730 days		cm
	Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 730 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD10-D1095-1	4047438036764	cm
MOBOTIX CLOUD Camera Subscription, 10MP/1095 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1095 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-HD10-D1825-1	4047438036771	cm
MOBOTIX CLOUD Camera Subscription, 10MP/1825 days		cm
Monthly subscription for using a single camera in the MOBOTIX CLOUD • Recording duration (retention period): 1825 days (automatic deletion afterwards) • Max. Resolution: 10MP • Free use of the MOBOTIX CLOUD app for desktop PC and mobile devices (Android and iOS) • Access portal: https://mobotixcloud.com • Cancellation/adjustment of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-ANA-001-1	4047438036320	cm
MOBOTIX CLOUD Analytics Subscription, Line Cross		cm
Monthly subscription for using the MOBOTIX CLOUD Analytics: Line Cross • Cancellation of subscription possible at any time at the end of the month	g	l cm



Mx-CL-Sub-ANA-002-1	4047438036337	cm
MOBOTIX CLOUD Analytics Subscription, Counting		cm
Monthly subscription for using the MOBOTIX CLOUD Analytics: Counting • Cancellation of subscription possible at any time at the end of the month	g	cm l

	Mx-CL-Sub-ANA-003-1	4047438036344	cm
	MOBOTIX CLOUD Analytics Subscription, Area Intrusion		cm
\bigcirc	Monthly subscription for using the MOBOTIX CLOUD Analytics: Area Intrusion • Cancellation of subscription possible at any time at the end of the month	g	cm l

\mathcal{C}	3

Mx-CL-Sub-ANA-004-1	4047438036351	cm
MOBOTIX CLOUD Analytics Subscription, Camera Tamper		cm
Monthly subscription for using the MOBOTIX CLOUD Analytics: Camera Tamper Detect • Cancellation of subscription possible at any time at the end of the month	g	cm l



Mx-CL-Sub-ANA-005-1	4047438036368	cm
MOBOTIX CLOUD Analytics Subscription, Loitering		cm
Monthly subscription for using the MOBOTIX CLOUD Analytics: Loitering • Cancellation of subscription possible at any time at the end of the month	g	cm l

мовотіх

Software & Services

Beyond Human Vision

MOBOTIX



All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX • 24.01.2025 • MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025

MOBOTIX HUB Video Management System

МОВОТІХ НИВ

Article No. / Name / Description	EAN / HS / weight	dimen.	
Mx-HUB-MgmtSrvFailover	4047438049580	cm	
MOBOTIX HUB Management Server Failover - Redundancy		cm	
Enables support for a failover server in the MOBOTIX HUB for the HUB Management Server • It provides HUB users with an always available high availability cluster with real • time replication and failover • It is a complete solution that protects the management server (and the event, log and SQL servers if they are installed on the same physical server) from hardware, software and human errors • Its efficient design and easy configuration give you the ability to seamlessly and automatically switch to a reliable backup management server if the primary server fails. • Its efficient design and simple configuration give you the ability to seamlessly and automatically switch to a reliable backup management server if the primary server fails. It offers real-time synchronous file replication, automatic application failover and automatic failback after a server failure • Licence is issued via MOBOTIX Sales • Licence is non-transferable • One licence per MOBOTIX HUB VMS is required. • Usable from MOBOTIX HUB L4 • Only 1 server pair per location is supported	g	cm l	



Mx-HUB-TRAD-MgmtSrvFailover-W	4047438049597	cm
MOBOTIX HUB Management Server Failover - Trade-in SL w/		cm
Product Upgrade of the MOBOTIX HUB Management Server Failover license, which are in possession of an Advanced Service Product (ASP). • Usable from MOBOTIX HUB L4 • Only 1 server pair per location is supported	g	cm l



Mx-HUB-TRAD-MgmtSrvFailover-WO	4047438049603	cm
MOBOTIX HUB Management Server Failover - Trade-in SL		cm
Product Upgrade of the MOBOTIX HUB Management Server Failover license, which are NOT in possession of an Advanced Service Product (ASP). • Usable from MOBOTIX HUB L4 • Only 1 server pair per location is supported	g	cm l



Mx-SW-HUB-SuspectTrack	4047438049474	cm
Milestone Suspect Tracking Plug In - Virtual Patrol Support		cm
Activates the Milestone Suspect Tracking plugin in the MOBOTIX HUB from our technology partner Milestone • Suspect Tracking offers a user-friendly way to track objects of interest between the cameras in the MOBOTIX HUB Desk Client or simply move around the camera area in a logical way • Suspect Tracking supports all integrated cameras in the MOBOTIX HUB, Independent of the manufacturer • Main application areas are: Virtual patrol for the user • Licence is issued via MOBOTIX Sales • Licence is not transferable • One licence per MOBOTIX HUB is required. • Usable from MOBOTIX HUB L2 • Independent of the number of integrated cameras • Permanent licence	g	cm l



Mx-HUB-L1-BAS	4047438039208	cm
L1 Base License (8 Device Licenses incl)		cm
MOBOTIX HUB L1 is available as a free version. The license includes the basic license and device license with the support of up to eight cameras	g	cm l



Mx-HUB-L2-BAS	4047438038584	cm
MOBOTIX HUB L2 Base License (BL)		cm
MOBOTIX HUB L2 for smaller companies with one location manages up to 48 surveillance cameras	g	cm l



Mx-HUB-L2-DEV	4047438038591	cm
MOBOTIX HUB L2 Device License (DL)		cm
Device licenses for MOBOTIX HUB L2. Up to 48 device licenses can be linked to the HUB L2	g	cm l



Mx-HUB-L2-1MDEV	4047438039215	cm
1 Month Advanced Services for MOBOTIX HUB L2 Device		cm
1 month MOBOTIX HUB L2 Advanced Services (Device license). For monthly extension of the MOBOTIX HUB L2 Advanced Service for 1, 2, 3 and 5 years.	g	cm l



Mx-HUB-L2-1YDEV	4047438038607	cm
One year MOBOTIX HUB Advanced Services for L2 Device		cm
1 Year MOBOTIX HUB L2 Advanced Service provides one year of scheduled product updates that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l



Mx-HUB-L2-2YDEV	4047438038614	cm
Two years MOBOTIX HUB Advanced Services for L2 Device		cm
2 Year MOBOTIX HUB L2 Advanced Service provides two years of scheduled product updates that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l



Mx-HUB-L2-3YDEV	4047438038621	cm
Three years MOBOTIX HUB Advanced Services for L2 Device		cm
3 Year MOBOTIX HUB L2 Advanced Service provides three years of scheduled product updates that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l

MOBOT	IV.
MUDUI	1

L2

Mx-HUB-L2-5YDEV	4047438038638	cm	
Five years MOBOTIX HUB Advanced Services for L2 Device		cm	
5 Year MOBOTIX HUB L2 Advanced Service provides five years of scheduled product updates that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l	



_			
	Mx-HUB-L2-3YOPT-DEV	4047438039031	cm
	Three years opt-in MOBOTIX HUB Advanced Services for L2		cm
	The MOBOTIX HUB Advanced Service Opt-In for HUB L2 device licenses, provides three years of access to firmware updates and trade-in options for MOBOTIX HUB L2 software if the previous Advanced Service has expired or has not been purchased within 30 days after ordering a HUB product.	g	cm l



Mx-HUB-L2-UP-BASWO	4047438039277	cm
Version Upgrade HUB L2 BL w/o ASP		cm
Software update for MOBOTIX HUB L2 base licenses that are not in possession of an Advanced Service Product.	g	cm l



Mx-HUB-L2-UP-DEVWO	4047438039284	cm
Version Upgrade HUB L2 DL w/o ASP		cm
Software update for MOBOTIX HUB L2 device licenses that are not in possession of an Advanced Service Product.	g	cm l



Mx-HUB-L3-BAS	404743803864	5 cm
MOBOTIX HUB L3 Base License (BL)		cm
MOBOTIX HUB L3 is the solution for medium-sized companies. The number of cameras is unlimited and can be distributed across multiple locations.	!	g cm l



Mx-HUB-L3-DEV	4047438038652	cm
MOBOTIX HUB L3 Device License (DL)		cm
Device licenses for MOBOTIX HUB L3. Unlimited number of devices can be integrated into one L3 installation.	g	cm l

cm cm

cm ι

	Mx-HUB-L3-1MDEV	4047438039222
L 3	1 Month Advanced Services for MOBOTIX HUB L3 Device 1 month MOBOTIX HUB L3 Advanced Services (Device license). For monthly extension of the MOBOTIX HUB L3 Advanced Service for 1, 2, 3 and 5 years.	g



Mx-HUB-L3-1YDEV	4047438038669	cm
One year MOBOTIX HUB Advanced Services for L3 Device		cm
1 Year MOBOTIX HUB L3 Advanced Service provides one year of scheduled product updates that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l



Mx-HUB-L3-2YDEV	4047438038676	cm
Two years MOBOTIX HUB Advanced Services for L3 Device		cm
2 Year MOBOTIX HUB L3 Advanced Service provides two years of scheduled product updates that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l



Mx-HUB-L3-3YDEV	4047438038683	cm
Three years MOBOTIX HUB Advanced Services for L3 Device		cm
3 Year MOBOTIX HUB L3 Advanced Service provides three years of scheduled product updates that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l



Mx-HUB-L3-5YDEV	4047438038690	cm
Five years MOBOTIX HUB Advanced Services for L3 Device		cm
5 Year MOBOTIX HUB L3 Advanced Service provides five years of scheduled product updates that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l



Mx-HUB-L3-3YOPT-DEV	4047438039048	cm
Three years opt-in MOBOTIX HUB Advanced Services for L3		cm
The MOBOTIX HUB Advanced Service Opt-In for HUB L3 device licenses, provides three years of access to firmware updates and trade-in options for MOBOTIX HUB L3 software if the previous Advanced Service has expired or has not been purchased within 30 days after ordering a HUB product.	g	cm l



Mx-HUB-TRAD-BAS-L2-L3-W	4047438039369	cm
Trade-in BL L2->L3 w/ ASP		cm
Product Upgrade of the base license from MOBOTIX HUB L2 to MOBOTIX HUB L3, which are in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-DEV-L2-L3-W	4047438039376	cm
Trade-in DL L2->L3 w/ ASP		cm
Product Upgrade of the device license from MOBOTIX HUB L2 to MOBOTIX HUB L3, which are in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-BAS-L2-L3-WO	4047438039383	cm
Trade-in BL L2->L3 w/o ASP		cm
Product Upgrade of the base license from MOBOTIX HUB L2 to MOBOTIX HUB L3, which are not in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-DEV-L2-L3-WO	4047438039390	cm
Trade-in DL L2->L3 w/o ASP		cm
Product Upgrade of the device license from MOBOTIX HUB L2 to MOBOTIX HUB L3, which are not in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-L3-UP-BASWO	4047438039291	cm
Version Upgrade HUB L3 BL w/o ASP		cm
Software update for MOBOTIX HUB L3 base licenses that are not in possession of an Advanced Service Product.	g	cm l



Mx-HUB-L3-UP-DEVWO	4047438039307	cm
Version Upgrade HUB L3 DL w/o ASP		cm
Software update for MOBOTIX HUB L3 device licenses that are not in possession of an Advanced Service Product.	g	cm l

N٨	0	R	n	TI	Y

|--|--|--|

	4047420020700	
Mx-HUB-L4-BAS	4047438038706	cm
MOBOTIX HUB L4 Base License (BL)		cm
MOBOTIX HUB L4 is made for medium and large installations. In addition to the features of MOBOTIX HUB L3, L4 provides access to failover recording servers in case	g	cm
of server failure. The use of MOBOTIX HUB L4 requires an Advanced Service (base +		l
devices) of at least one year.		



Mx-HUB-L4-DEV	4047438038713	cm
MOBOTIX HUB L4 Device License (DL)		cm
Device licenses for MOBOTIX HUB L4. Unlimited number of devices can be integrated into one L4 installation. The use of MOBOTIX HUB L4 requires an Advanced Service (base + devices) of at least one year.	g	cm l



Mx-HUB-L4-1MBAS	4047438039239	cm
1 Month Advanced Services for MOBOTIX HUB L4 Base		cm
1 month MOBOTIX HUB L4 Advanced Services (basic license). For monthly extension of the MOBOTIX HUB L4 Advanced Service for 1, 2, 3 and 5 years.	g	cm l



Mx-HUB-L4-1YBAS	4047438038720	cm
One year MOBOTIX HUB Advanced Services for L4 Base		cm
1 year MOBOTIX HUB L4 Advanced Service (base license) provides regular product updates over one year, making the product more secure, efficient and powerful, and also offers the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l



Mx-HUB-L4-2YBAS	4047438038737	cm
Two years MOBOTIX HUB Advanced Services for L4 Base		cm
2 years MOBOTIX HUB L4 Advanced Service (base license) provides periodic product updates over 2 years that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l



Mx-HUB-L4-3YBAS	4047438038744	cm
Three years MOBOTIX HUB Advanced Services for L4 Base		cm
3 years MOBOTIX HUB L4 Advanced Service (base license) provides periodic product updates over 3 years that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l

L4

Mx-HUB-L4-5YBAS Five years MOBOTIX HUB Advanced Services for L4 Base	4047438038751	cm cm	
5-year MOBOTIX HUB L4 Advanced Service (base license) provides 5-year periodic product updates that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l	



Mx-HUB-L4-3YOPT-BAS	4047438039055	cm
Three years opt-in MOBOTIX HUB Advanced Services for L4		cm
The MOBOTIX HUB Advanced Service Opt-In for HUB L4 base licenses, provides three years of access to firmware updates and trade-in options for MOBOTIX HUB L4 software if the previous Advanced Service has expired or has not been purchased within 30 days after ordering a HUB product.	g	cm l



Mx-HUB-L4-1MDEV	4047438039246	cm
1 Month Advanced Services for MOBOTIX HUB L4 Device		cm
1 month MOBOTIX HUB L4 Advanced Services (Device license). For monthly extension of the MOBOTIX HUB L4 Advanced Service for 1, 2, 3 and 5 years.	g	cm l



Mx-HUB-L4-1YDEV	4047438038768	cm
One year MOBOTIX HUB Advanced Services for L4 Device		cm
1 year MOBOTIX HUB L4 Advanced Service (Device license) provides regular product updates over one year, making the product more secure, efficient and powerful, and also offers the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution	g	cm l



Mx-HUB-L4-2YDEV	4047438038775	cm
Two years MOBOTIX HUB Advanced Services for L4 Device		cm
2 years MOBOTIX HUB L4 Advanced Service (Device license) provides periodic product updates over 2 years that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l



Mx-HUB-L4-3YDEV	4047438038782	cm
Three years MOBOTIX HUB Advanced Services for L4 Device		cm
3 years MOBOTIX HUB L4 Advanced Service (Device license) provides periodic product updates over 3 years that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l

Mx-HUB-L4-5YDEV	4047438038799	cm	
Five years MOBOTIX HUB Advanced Services for L4 Device		cm	
5-year MOBOTIX HUB L4 Advanced Service (Device license) provides 5-year periodic product updates that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l	



_			
	Mx-HUB-L4-3YOPT-DEV	4047438039062	cm
	Three years opt-in MOBOTIX HUB Advanced Services for L4		cm
	The MOBOTIX HUB Advanced Service Opt-In for HUB L4 device licenses, provides three years of access to firmware updates and trade-in options for MOBOTIX HUB L4 software if the previous Advanced Service has expired or has not been purchased within 30 days after ordering a HUB product.	g	cm l



Mx-HUB-TRAD-BAS-L2-L4-W	4047438039406	cm
Trade-in BL L2->L4 w/ ASP		cm
Product Upgrade of the base license from MOBOTIX HUB L2 to MOBOTIX HUB L4, which are in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-DEV-L2-L4-W	4047438039413	cm
Trade-in DL L2->L4 w/ ASP		cm
Product Upgrade of the device license from MOBOTIX HUB L2 to MOBOTIX HUB L4, which are in possession of an Advanced Service Product (ASP).	g	cm I



Mx-HUB-TRAD-BAS-L2-L4-WO	4047438039420	cm
Trade-in BL L2->L4 w/o ASP		cm
Product Upgrade of the base license from MOBOTIX HUB L2 to MOBOTIX HUB L4, which are not in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-DEV-L2-L4-WO	4047438039437	cm
Trade-in DL L2->L4 w/o ASP		cm
Product Upgrade of the device license from MOBOTIX HUB L2 to MOBOTIX HUB L4, which are not in possession of an Advanced Service Product (ASP).	g	cm l



 Mx-HUB-TRAD-BAS-L3-L4-W	4047438039444	cm
Trade-in BL L3->L4 w/ ASP		cm
Product Upgrade of the base license from MOBOTIX HUB L3 to MOBOTIX HUB L4, which are in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-DEV-L3-L4-W	4047438039451	cm
Trade-in DL L3->L4 w/ ASP		cm
Product Upgrade of the device license from MOBOTIX HUB L3 to MOBOTIX HUB L4, which are in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-BAS-L3-L4-WO	4047438039468	cm
Trade-in BL L3->L4 w/o ASP		cm
Product Upgrade of the base license from MOBOTIX HUB L3 to MOBOTIX HUB L4, which are not in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-DEV-L3-L4-WO	4047438039475	cm
Trade-in DL L3->L4 w/o ASP		cm
Product Upgrade of the device license from MOBOTIX HUB L3 to MOBOTIX HUB L4, which are not in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-L4-UP-BASWO	4047438039314	cm
Version Upgrade HUB L4 BL w/o ASP		cm
Software update for MOBOTIX HUB L4 base licenses that are not in possession of an Advanced Service Product.	g	cm l



Mx-HUB-L4-UP-DEVWO	4047438039321	cm
Version Upgrade HUB L4 DL w/o ASP		cm
Software update for MOBOTIX HUB L4 device licenses that are not in possession of an Advanced Service Product.	g	cm l

L5

Mx-HUB-L5-BAS	4047438038805	cm
MOBOTIX HUB L5 Base License (BL)		cm
MOBOTIX HUB L5 is the video management platform for large and extremely security-oriented applications. In addition to centralized management of all servers, cameras and users across multiple sites, L5 also includes control for a professional video wall as standard. The use of MOBOTIX HUB L5 requires an Advanced Service (base + devices) of at least one year.	g	cm l



Mx-HUB-L5-DEV	4047438038812	cm
MOBOTIX HUB L5 Device License (DL)		cm
Device licenses for MOBOTIX HUB L5. Unlimited number of devices can be integrated into one L5 installation.	g	cm l



Mx-HUB-L5-INTCON	4047438038829	cm
MOBOTIX HUB Interconnect Device License (DL)		cm
Interconnect licenses for MOBOTIX HUB L5. Unlimited number of Interconnect licenses can be used into one L5 installation.	g	cm l



Mx-HUB-L5-1MBAS	4047438039253	cm
1 Month Advanced Services for MOBOTIX HUB L5 Base		cm
1 month MOBOTIX HUB L5 Advanced Services (basic license). For monthly extension of the MOBOTIX HUB L5 Advanced Service for 1, 2, 3 and 5 years.	g	cm l



Mx-HUB-L5-1YBAS	4047438038836	cm
One year MOBOTIX HUB Advanced Services for L5 Base		cm
1 year MOBOTIX HUB L5 Advanced Service (base license) provides regular product updates over one year, making the product more secure, efficient and powerful, and also offers the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l



Mx-HUB-L5-2YBAS	4047438038843	cm
Two years MOBOTIX HUB Advanced Services for L5 Base		cm
2 years MOBOTIX HUB L5 Advanced Service (base license) provides periodic product updates over 2 years that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l

L5

Mx-HUB-L5-3YBAS	4047438038850	cm	
Three years MOBOTIX HUB Advanced Services for L5 Base	4047430038630	cm	
3 years MOBOTIX HUB L5 Advanced Service (base license) provides periodic product updates over 3 years that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l	



Mx-HUB-L5-5YBAS	4047438038867	cm
Five years MOBOTIX HUB Advanced Services for L5 Base		cm
5-year MOBOTIX HUB L5 Advanced Service (base license) provides 5-year periodic product updates that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution.	g	cm l



Mx-HUB-L5-3YOPT-BAS	4047438039079	cm
Three years opt-in MOBOTIX HUB Advanced Services for L5		cm
The MOBOTIX HUB Advanced Service Opt-In for HUB L5 base licenses, provides three years of access to firmware updates and trade-in options for MOBOTIX HUB L5 software if the previous Advanced Service has expired or has not been purchased within 30 days after ordering a HUB product.	g	cm l



Mx-HUB-L5-1MDEV	4047438039260	cm
1 Month Advanced Services for MOBOTIX HUB L5 Device		cm
1 month MOBOTIX HUB L5 Advanced Services (Device license). For monthly extension of the MOBOTIX HUB L5 Advanced Service for 1, 2, 3 and 5 years.	g	cm l



Mx-HUB-L5-1YDEV	4047438038874	cm
One year MOBOTIX HUB Advanced Services for L5 Device		cm
1 year MOBOTIX HUB L5 Advanced Service (Device license) provides regular product updates over one year, making the product more secure, efficient and powerful, and also offers the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution	g	cm l



Mx-HUB-L5-2YDEV	4047438038881	cm
Two years MOBOTIX HUB Advanced Services for L5 Device		cm
2 years MOBOTIX HUB L5 Advanced Service (Device license) provides periodic product updates over 2 years that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution	g	cm l

L5

Mx-HUB-L5-3YDEV	4047438038898	cm	
Three years MOBOTIX HUB Advanced Services for L5 Device		cm	
3 years MOBOTIX HUB L5 Advanced Service (Device license) provides periodic product updates over 3 years that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution	g	cm l	



Mx-HUB-L5-5YDEV	4047438038904	cm
Five years MOBOTIX HUB Advanced Services for L5 Device		cm
5-year MOBOTIX HUB L5 Advanced Service (Device license) provides 5-year periodic product updates that make the product more secure, efficient and powerful, and also provides the greatest possible return on your original HUB investment when upgrading to a more advanced HUB solution	g	cm l



Mx-HUB-L5-3YOPT-DEV	4047438039086	cm
Three years opt-in MOBOTIX HUB Advanced Services for L5		cm
The MOBOTIX HUB Advanced Service Opt-In for HUB L5 device licenses, provides three years of access to firmware updates and trade-in options for MOBOTIX HUB L5 software if the previous Advanced Service has expired or has not been purchased within 30 days after ordering a HUB product.	g	cm l



Mx-HUB-TRAD-BAS-L2-L5-W	4047438039482	cm
Trade-in BL L2->L5 w/ ASP		cm
Product Upgrade of the base license from MOBOTIX HUB L2 to MOBOTIX HUB L5, which are in possession of an Advanced Service Product (ASP).	g	cm I



Mx-HUB-TRAD-DEV-L2-L5-W	4047438039499	cm
Trade-in DL L2->L5 w/ ASP		cm
Product Upgrade of the device license from MOBOTIX HUB L2 to MOBOTIX HUB L5, which are in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-BAS-L2-L5-WO	4047438039505	cm
Trade-in BL L2->L5 w/o ASP		cm
Product Upgrade of the base license from MOBOTIX HUB L2 to MOBOTIX HUB L5, which are not in possession of an Advanced Service Product (ASP).	g	cm l



 Mx-HUB-TRAD-DEV-L2-L5-WO	4047438039512	cm
Trade-in DL L2->L5 w/o ASP		cm
Product Upgrade of the device license from MOBOTIX HUB L2 to MOBOTIX HUB L5, which not are in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-BAS-L3-L5-W	4047438039529	cm
Trade-in BL L3->L5 w/ ASP		cm
Product Upgrade of the base license from MOBOTIX HUB L3 to MOBOTIX HUB L5, which are in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-DEV-L3-L5-W	4047438039536	cm
Trade-in DL L3->L5 w/ ASP		cm
Product Upgrade of the device license from MOBOTIX HUB L3 to MOBOTIX HUB L5, which are in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-BAS-L3-L5-WO	4047438039543	cm
Trade-in BL L3->L5 w/o ASP		cm
Product Upgrade of the base license from MOBOTIX HUB L3 to MOBOTIX HUB L5, which are not in possession of an Advanced Service Product (ASP).	g	cm I



Mx-HUB-TRAD-DEV-L3-L5-WO	4047438039550	cm
Trade-in DL L3->L5 w/o ASP		cm
Product Upgrade of the device license from MOBOTIX HUB L3 to MOBOTIX HUB L5, which not are in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-BAS-L4-L5-W	4047438039567	cm
Trade-in BL L4->L5 w/ ASP		cm
Product Upgrade of the base license from MOBOTIX HUB L4 to MOBOTIX HUB L5, which are in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-DEV-L4-L5-W	4047438039574	cm
Trade-in DL L4->L5 w/ ASP		cm
Product Upgrade of the device license from MOBOTIX HUB L4 to MOBOTIX HUB L5, which are in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-BAS-L4-L5-WO	4047438039581	cm
Trade-in BL L4->L5 w/o ASP		cm
Product Upgrade of the base license from MOBOTIX HUB L4 to MOBOTIX HUB L5, which are not in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-TRAD-DEV-L4-L5-WO	4047438039598	cm
Trade-in DL L4->L5 w/o ASP		cm
Product Upgrade of the device license from MOBOTIX HUB L4 to MOBOTIX HUB L5, which not are in possession of an Advanced Service Product (ASP).	g	cm l



Mx-HUB-L5-UP-BASWO	4047438039338	cm
Version Upgrade HUB L5 BL w/o ASP		cm
Software update for MOBOTIX HUB L5 base licenses that are not in possession of an Advanced Service Product	g	cm l




Mx-HUB-L5-UP-DEVWO	4047438039345	cm
Version Upgrade HUB L5 DL w/o ASP		cm
Software update for MOBOTIX HUB L5 device licenses that are not in possession of an Advanced Service Product	g	cm l




Mx-HUB-L5-UP-INTWO	4047438039352	cm
Version Upgrade HUB L5 Intercon. DL w/o ASP		cm
Software update for MOBOTIX HUB L5 interconnect licenses that are not in possession of an Advanced Service Product	g	cm l

Mx-HUB-ACC-WALL	4047438039116	cm
MOBOTIX HUB Video Wall Base License (BL)		cm
MOBOTIX HUB Video Wall is an advanced add-on video wall product that improves response time by displaying all the video data in your installation and giving a complete overview of large surveillance centers.	g	cm l




Mx-HUB-ACC-WALL-UP	4047438039604	cm
Version Upgrade HUB Video Wall BL w/o ASP		cm
Software update for MOBOTIX HUB Video Wall license that are not in possession of an Advanced Service Product	g	cm l



Mx-HUB-ACS-BASE	4047438039178	cm
MOBOTIX HUB Access Base License (BL)		cm
MOBOTIX HUB Access is an Add-on product that video enables physical security through integration of access control and intrusion systems	g	cm l



Mx-HUB-ACS-BASE-UP	4047438039611	cm
Version Upgrade HUB Access BL w/o ASP		cm
Software update for MOBOTIX HUB Access Basic license, which are not in possession of an Advanced Service product.	g	cm l



4047438039185	cm
	cm
g	cm
	ι
	~



K-HUB-ACS-DOOR-UP 4047438039628		cm
Version Upgrade HUB Access DL w/o ASP		cm
Software Update for MOBOTIX HUB Access Devices License, which are not in possession of an Advanced Service Product.	g	cm l

\bigcirc	

Mx-HUB-XP-TRA-BAS Xprotect Transaction Base License Server incl. 1 Connection	4047438039154	cm cm	
XProtect Transact Base Server incl. 1 Connection License. XProtect Transact video enables different types of transaction-based processes.Combining transaction data from point of sales systems, scanners, cash point machines, or similar systems with corresponding video, XProtect Transact enables real-time monitoring, exception handling and documentation of transactions.	g	cm l	



Mx-HUB-XP-TRA-BAS-UP	4047438039635	cm
Version Upgrade Xprotect Transaction BL w/o ASP		cm
Software Update for XProtect Transaction Base License, which are not in possession of an Advanced Service Product.	g	cm l



Mx-HUB-XP-TRA-CON 4047438039161		cm
Xprotect Transaction Connection License		cm
Connection licence for Xprotect Transact.	g	cm
		ι



Mx-HUB-XP-TRA-CON-UP	4047438039642	cm
Version Upgrade Xprotect Transaction CL w/o ASP		cm
Software update for XProtect Transaction Connection license, which are not in possession of an Advanced Service Product	g	cm l



Mx-HUB-XP-LPR-BAS	4047438039123	cm
Xprotect LPR Base License incl. 5 Country Modules		cm
XProtect LPR Base License, incl. 5 Country Modules. XProtect LPR is license plate recognition (LPR) software that detects license plate information from any vehicle around the world and links the license plate number with video.	g	cm l



Mx-HUB-XP-LPR-BAS-UP	4047438039659	cm
Version Upgrade Xprotect LPR BL w/o ASP		cm
Software update for XProtect LPR Basic license, which are not in possession of an Advanced Service Product.	g	cm l

LPR 12345	Mx-HUB-XP-LPR-DEV XProtect LPR Device License (DL) Device licence for Xprotect LPR.

4047438039130	cm
	cm
g	cm
	l



Mx-HUB-XP-LPR-DEV-UP	4047438039666	cm
Version Upgrade Xprotect LPR DL w/o ASP		cm
Software update for XProtect LPR devices license, which are not in possession of an Advanced Service Product.	g	cm l



Mx-HUB-XP-LPR-CTY	4047438039147	cm
Xprotect LPR Country Modul		cm
Country modul for Xprotect LPR.	g	cm
		l



Mx-HUB-XP-LPR-CTY-UP	4047438039673	cm
Version Upgrade Xprotect LPR CM w/o ASP		cm
Software update for XProtect LPR Country Module not in possession of an Advanced Service Product.	g	cm l

MxManagementCenter and Additional Licences

ONVIF-compliant Video Managemnt System

MxManagementCenter (MxMC) is a powerful, intuitive video management system for Windows and macOS systems. MxMC can be utilized for projects and security installations of all sizes and with any number of cameras orstorage media. It was designed to be user-friendly, high-performing and secure.

Please follow this link for further license-related informations: https://www.mobotix.com/de/support/download-center/software-downloads/lizenz-portal product in the second sec

Article No. / N	lame / Description	EAN / HS / weight	dimen.	
Mx-SW-MC-ADCC	DN-VM	4047438035071	0,0 cm	
MxMC Advanced	Config License for virtual machines (VM)		0,0 cm	
WIXINC workstation (as of MxM	IX license for using the advanced configuration with a MxM C 2.0) • No time limit for use, unlimited number of users pe d via external license portal (access data required) • release M)	r 0.5	0,0 cm 0,0 l	

	Mx-SW-MC	4047438034456	0,0 cm
	MxManagementCenter VMS For Windows/macOS		0,0 cm
МхМС	Free-of-charge MOBOTIX video management software MxManagementCenter	0 g	0,0 cm
	(MxMC) • Certified ONVIF conformity (Profile S) • Language packs: English, German, French, Spanish, Italian, Russian, Turkish, Portuguese, Japanese • System		0,0 l
VMS	requirements: 2 GHz processor (min.), at least 2 GB RAM, video card with support for		0,0 1
	OpenGL V2.1 • Download free of charge: www.mobotix.com > Services > Download		
	Center > Software Downloads > MxManagementCenter		



Mx-SW-MC-ADCON	4047438034197	0,0 cm
MxMC Advanced Config License		0,0 cm
Free-of-charge MOBOTIX license for using the advanced configuration with a MxMC workstation (as of MxMC 2.0) • No time limit for use, unlimited number of users per workstation • Download via external license portal (access data required)	0 9	0,0 cm 0,0 l



7

Mx-SW-MC-STARTER	4047438034142	0,0 cm
MxMC Integration Starter License		0,0 cm
MOBOTIX license for the general use of H.264 with a MxMC workstation (as of MxMC 2.0) for live images, playback and/or export • Unlimited number of users per workstation • No time limit for use • One additional video channel for a third-party ONVIF-S camera included • Download via external license portal (access data required)	0 9	0,0 cm 0,0 l

	Mx-SW-MC-CHAN MxMC Integration Channel License	4047438034159	0,0 cm 0.0 cm
MxMC Int. Channel	MOBOTIX license for using an additional video channel from an external ONVIF S compliant IP camera with a MxMC workstation (as of MxMC 2.0) • No time limit for use, unlimited number of users per workstation • Download via external license portal (access data required)	0 g	0,0 cm 0,0 l

	MxMC	
ראי	Smart Data	

Mx-SW-MC-SDATA MxMC Smart Data License	4047438034449	0,0 cm 0.0 cm
MOBOTIX license for connectiong an external data source (Smart Data Source) to a MxMC workstation (as of MxMC 2.1) • No time limit for use, unlimited number of users per workstation • Download via external license portal (access data required)	0 g	0,0 cm 0,0 l

		Мх
		Мх
	MxMC	MOE 1.7)
L ^M 1	POS	via e

Mx-SW-MC-POS	4047438031615	0,0 cm
MxMC POS Single Cash Point License		0,0 cm
MOBOTIX license for connecting a cash register to a MxMC workstation (as of MxMC 1.7) • No time limit for use, unlimited number of users per workstation • Download via external license portal (access data required)	0 g	0,0 cm 0,0 l



Mx-SW-MC-AS-1	4047438034166	0,0 cm
MxMC Advanced Service License, 1 Year		0,0 cm
MOBOTIX license for using the advanced system service and the MxMC Health Check with a MxMC workstation (as of MxMC 2.0) • Valid for up to 64 MOBOTIX devices • Validity: 1 year/12 months • Unlimited number of users per workstation • Download via external license portal (access data required)	09	0,0 cm 0,0 l



Mx-SW-MC-AS-2	4047438034173	0,0 cm
MxMC Advanced Service License, 2 Years		0,0 cm
MOBOTIX license for using the advanced system service and the MxMC Health Check with a MxMC workstation (as of MxMC 2.0) • Valid for up to 64 MOBOTIX devices • Validity: 2 years/24 months • Unlimited number of users per workstation • Download via external license portal (access data required)	0 g	0,0 cm 0,0 l



	Mx-SW-MC-AS-5	4047438034180	0,0 cm
_	MxMC Advanced Service License, 5 Years		0,0 cm
	MOBOTIX license for using the advanced system service and the MxMC Health Check with a MxMC workstation (as of MxMC 2.0) • Valid for up to 64 MOBOTIX devices • Validity: 5 years/60 months • Unlimited number of users per workstation • Download via external license portal (access data required)	0 g	0,0 cm 0,0 l

Certified Apps for MOBOTIX 7

Certified Apps for MOBOTIX 7

	Article No. / Name / Description	EAN / HS / weight	dimen.
	Mx-APP-KEP-NUA-EXT	4047438049412	cm
$(+ \mathbf{x})$	Plug-in license to extend the functionality of c71		cm
	Plug-In license to extend the NurseAssist status and alarm notifications with the following functions: • Person sits on the edge of the bed • Person has left the room • Person has entered the room • Person has entered the bathroom / is in the bathroom • Bed is not recognized / is not present • Distinction between person lying and sitting on the floor • IMPORTANT: Requires MOBOTIX c71 NurseAssist Smart Sensor or licensed Kepler NurseAssist Certified App		cm l

Certified Apps for MOBOTIX 7

Certified Apps for MOBOTIX 7

Mx-APP-IRIS-ANO 4047438045230 cm Irisity Iris Anonymization App cm Irisity Iris Anonymization App including the following features: • patented dynamic pixelation of people in the camera's field of view · designed to address GDPR and privacy regulations • Configurable option to force switch to black/white image to ensure maximum privacy · applicable in indoor and outdoor camera operation • I
MOBOTIX Irisity Iris Anonymization App including the following features: • patented dynamic g cm pixelation of people in the camera's field of view • designed to address GDPR and privacy regulations • Configurable option to force switch to black/white image to l
pixelation of people in the camera's field of view • designed to address GDPR and privacy regulations • Configurable option to force switch to black/white image to
ensure maximum pracy - apprication in moto outcolor camera operation - pixelation of persons from a minimum height of 20 pixels



	Mx-APP-IRIS-C-INT	4047438040693	cm
	Irisity Iris Core Intrusion App		cm
	risity Iris Core Intrusion App including the following features: • Detects the intrusion of objects of interest into user-defined detection zones / areas • Designed for reliable detection of people and vehicles covering only small portions of the field of view • Reduction of false alarms to a minimum by filtering out non-critical motion (e.g. trees, clouds, etc.) • simultaneous detection on one or more image sensors • MOBOTIX events via MxMessageSystem • Consolidated event search via MxManagementCenter Smart Data Interface and / or MOBOTIX HUB	g	cm l



Mx-APP-MX-ARA	4047438044998	cm
MOBOTIX Advanced Radiometry App		cm
MOBOTIX Advanced Radiometry App including the following features: • Extensive the temperature measurement functions of MOBOTIX Thermal Radiometry cam (CNPP 19005 compliant) • Definition of up to 20 temperature measurement area within the field of view of the camera • individual calibration of each temperature measurement area (e.g. emissivity values) • Temperature events when defined temperature thresholds are exceeded • Detection of physical manipulation of th thermal sensor (e.g. sensor covered) • MOBOTIX events via MxMessageSystem • Reporting of temperature data and threshold status of each area via MODBUS/T and JSON	ieras is re	cm l



1	Mx-APP-MX-BAR	4047438044981	cm
	MOBOTIX Barcode Reader App		cm
< >	MOBOTIX Barcode Reader App including the following features: • Reader supports more than 40 common 1D, 2D and Stacked barcode types (e.g. QR Code, Data Matrix Code, Dot Code, etc.) • Optimized for difficult barcode reads (e.g. damaged, faded or distorted barcodes, barcodes on difficult surfaces, DPM codes) • Quick reading of one or multiple barcodes in motion • Definition of up to 20 detection areas within the camera's field of view • MOBOTIX events via MxMessageSystem • reporting of barcode reads via generic XML, JSON and MODBUS/TCP	g	cm l



Mx-APP-MX-COR	4047438042567	cm
MOBOTIX Color Recognition App		cm
MOBOTIX Color Recognition including the following features: • Detection of user- specified color values within customized detection areas • Definition of up to 20 detection areas within the camera's field of view • Supports the recognition of all RGB color values • Set sensitivity, required percentage within the defined detection area and duration of the associated condition • MOBOTIX events via MxMessageSystem	g	cm l



Mx-A	APP-MX-THD 404743804508	37 cm
мов	OTIX Thermal Heat Detection App	cm
of the t camera temper calibra Tempe of phys events in any of	TIX Thermal Heat Detection App including the following features: • Extension temperature measurement functions of MOBOTIX Thermal Radiometry as (according to CNPP France 19005 certification) • Definition of up to 20 rrature measurement areas within the field of view of the camera • individual ation of each temperature measurement area (e.g. emissivity values) • erature events when defined temperature thresholds are exceeded • Detection sical manipulation of the thermal sensor (e.g. sensor covered) • MOBOTIX via MXMessageSystem • the MOBOTIX Thermal Heat Detection App is required case to fulfill the requirements for CNPP France 19005 certification (Thermal a Heat Detection Systems)	g cm l



	Mx-APP-MX-TVA	4047438045216	cm
	MOBOTIX Thermal Validation App		cm
< >	MOBOTIX Thermal Validation App including the following features: • App optimizes MOBOTIX Thermal Radiometry cameras for use in the fields of waste management and logistics • Enables filtering of vehicles (e.g. construction vehicles und forklifts) as a non-critical source of high temperatures (e.g. by measuring hot body parts such as the exhaust or engine cover) • Extension of the temperature measurement functions of MOBOTIX Thermal Radiometry cameras (CNPP 19005 compliant) • Definition of up to 20 temperature measurement areas within the field of view of the camera •	g	cm l
	 individual calibration of each temperature measurement area (e.g. emissivity values) • Temperature events when defined temperature thresholds are exceeded • Detection of physical manipulation of the thermal sensor (e.g. sensor covered) • MOBOTIX events via MxMessageSystem • Reporting of temperature data and threshold status of each area via MODBUS/TCP and JSON / XML via HTTP(S) 		



Mx-APP-VX-ADR	4047438037815	
axtor App License Plate and Dangerous Goods Recognition		C
/axtor App for License Plate and Dangerous Goods Recognition including the ollowing features: • License plate recognition of one- and two-line license plates • ead conventional and dangerous good plates simultaneously • support of latin, hebrew and arabic characters for global application • recognition log (Smart Data /	g	C
:vent Search via MxManagementCenter) • MOBOTIX events via MxMessageSystem • 'wo lists for individual actions (e.g. access granted/denied, alarm, etc.) • Free flow ind tripper mode for I PR/ADR		



	Mx-APP-VX-AIN	4047438040518	cm	
	Vaxtor Aircraft Identification Number Recognition App		cm	
X P	Vaxtor Aircraft Identification Number Recognition App including the following features: • Recognition of ICAO- and FAA-issued identification numbers • Operations up to a speed of 50 km/h • Real-time results: Aircraft ID, Aircraft Type, Country, etc. • MOBOTIX events via MxMessageSystem • Consolidated event search via MxManagementCenter Smart Data Interface and / or MOBOTIX HUB • meta data transfer through generic transmission protocols and / or pre-defined 3rd party interfaces • Two lists for individual actions (e.g. access granted/denied, alarm, etc.)	g	cm l	



Mx-APP-VX-CON	4047438037938	cm
Vaxtor App for Cargo Container Code Recognition		cm
Vaxtor App for Container Code Recognition including the following features: • Recognition of cargo container codes according to ISO 6346 • Real time results: • Container Code • Property Code • Owner • Container Type • Container Dimensions • Control Digit • Control Digit Validation • Recognition log (Smart Data / Event Search	g	cm l
via MxManagementCenter) • MOBOTIX events via MxMessageSystem • Two lists for individual actions (e.g. access granted/denied, alarm, etc.) • Free flow and Signaled mode		

MOBOTIX Certified App	MOBO Certified	

	Mx-APP-VX-GEN	4047438042543	cm
)	Vaxtor Generic Optical Character Recognition App		cm
	Vaxtor Generic Optical Character Recognition App including the following features: • generic optical character recognition to read any combination of uppercase Latin characters and/or numbers • reads characters arranged in up to three lines • user- defined specification of the required code format • recognition log • MOBOTIX events via MxMessageSystem • numerous integration options for further processing of the generated metadata (generic as well as native reporting interfaces) • Two lists for individual actions (e.g. access granted/denied, alarm, etc.) • Free flow and Signaled mode	g	cm l

	М
	V
MOBOTIX Certified App	Va pl
Certified App	ev

	Mx-APP-VX-LPR 40474380	37358	cm
	Vaxtor License Plate Recognition App		cm
< >	Vaxtor License Plate Recognition App including the following features: • License plate recognition of one- and two-line license plates • Recognition log • MOBOTIX events via MxMessageSystem • Global country coverage	g	cm l



Mx-APP-VX-LPR-M Vaxtor License Plate Recognition App (multi-lens	4047438040402	cm cm
Vaxtor License Plate Recognition App (multi-lens application) for S74 with two optical sensor moduels including the following features: • License plate recognition of one- and two-line license plates • simultaneous recognition on both image sensors • monitoring the dwell time of license plates in the detection area • support of latin, hebrew and arabic characters for global application • Recognition log • MOBOTIX events via MxMessageSystem • Two lists for individual actions (e.g. access granted/denied, alarm, etc.) • Free flow and Signaled mode	g	cm l



Mx-APP-VX-MMC	4047438038324	
Vaxtor License Plate Recognition App incl. Vehicle Make,		
Vaxtor License Plate Recognition App including the following features: • License plate recognition of one- and two-line license plates • support of latin, hebrew and arabic characters for global application • Additional recognition of vehicle make, model, color and class • Recognition log (Smart Data / Event Search via MxManagementCenter) • MOBOTIX events via MxMessageSystem • Two lists for individual actions (e.g. access granted/denied, alarm, etc.) • Free flow and Signaled mode	g	



-			
	Mx-APP-VX-UIC	4047438040266	cm
	Vaxtor App for UIC Railway Code Recognition		cm
	Vaxtor App for UIC Railway Code Recognition including the following features: • Recognition of the International Union of Railways Wagon and Coach numbers (UIC Codes) • Real time results: UIC Code, Country Code, Vehicle Type, Control Digit, Direction of travel • Stop / Go and slow speed (<10 km/h) applications (depending on installation and module selection) • MOBOTIX events via MxMessageSystem • Consolidated event search via MxManagementCenter Smart Data Interface and / or MOBOTIX HUB • meta data transfer through generic transmission protocols and / or pre-defined 3rd party interfaces • Two lists for individual actions (e.g. access granted/denied, alarm, etc.) • Free flow and Signaled mode	g	cm l



-			
	Mx-APP-VX-USD	4047438041638	cm
)	Vaxtor USDOT Number Recognition App		cm
	Vaxtor USDOT Number Recognition App including the following features:	g	cm
	Recognition of USDOT identification numbers • Operations up to a vehicle speed of 50 km/h • MOBOTIX events via MxMessageSystem • Consolidated event search via		l
	MxManagementCenter Smart Data Interface and / or MOBOTIX HUB • meta data		
	transfer through generic transmission protocols and / or pre-defined 3rd party interfaces • Two lists for individual actions (e.g. access granted/denied, alarm, etc.) •		
	Free flow and Signaled operation mode		

cm cm

cm l

Desktop Apps

esktop Apps			
	Article No. / Name / Description	EAN / HS / weight	dimen.
	Mx-SW-MC-QNAP	4047438047791	cm
	QNAP QVR Pro license for activation of MxMC Playback		cm
	Enables MxMC playback support in the QVR Pro recording software on a QNAP NAS	g	cm
	with QTS operating system. • Supports MxMC playback from ONVIF cameras such as the MOVE camera series. • Optimal combination on a QNAP NAS • IOT cameras store independently on the NAS via file sharing (SMB) and record the integrated MOVE or ONVIF cameras in parallel with the QVR Pro Recording Software. The output is done with the MxMC. • The license is activated on the QNAP NAS via the QNAP License Manager. • License is not transferable • one license per QNAP NAS with QVR Pro is required! • For camera recordings, QNAP requires additional camera channel licenses per channel, which must be obtained from QNAP!		l
	Mx-SW-MC-Th-DB-Bas	4047438048217	cm
	MOBOTIX MxMC Feature - ThermalDashboard Base License		cm
	Activates the MOBOTIX Thermal Dashboard in the MxMC and supports the MOBOTIX	g	cm
МхМС	Thermal Camera functions • Main applications are: • Live monitoring and surveillance of temperature-critical processes • Subsequent analysis of the temperature curve • Supports MOBOTIX Thermal Cameras P3, P6 and P7 • Restriction of the P3 to temperature graphs no hot spot areas • License is activated via the MOBOTIX License Portal. • License is not transferable • One license per MxMC is required. • With one license, thermal graphs from 4 thermal cameras can be integrated in the layout • Additional thermal cameras require one MOBOTIX MxMC Device license per camera - Permanent license		l
МхМС	Mx-SW-MC-Th-DB-Dev MOBOTIX MxMC Feature - ThermalDashboard Device Activates another camera in the MOBOTIX Thermal Dashboard in the MxMC and supports the MOBOTIX Thermal Camera functions - Supports MOBOTIX Thermal Cameras P3, P6 and P7 • Restriction of the P3 to temperature graphs no hot spot areas • License is activated via the MOBOTIX License Portal. • License is not transferable • One license per MxMC is required. • Requires a MOBOTIX Thermal Dashboard Base license • With one license, thermal graphs from 4 thermal cameras can be integrated in the layout • Additional thermal cameras require one MOBOTIX Device license per camera • Permanent license	4047438048224 g	cm cm l
	Mx-SW-XPro-CLOUD-Bas	4047438047876	cm
\wedge	MOBOTIX HUB Plug In - MOBOTIX CLOUD Base License for		cm
	Activates the MOBOTIX CLOUD support in Milestone XProtect • Main application	g	cm
	features in the Smart Client are • Integrating cloud cameras in the desk client layout Additional CLOUD tab in the application • License is activated via the MOBOTIX License Portal. • License is not transferable • One license per Milestone XProtect VMS is required. • 4 cameras are included in the Base license • Additional cameras require a device licence per camera • Permanent License		l
\wedge	Mx-SW-XPro-CLOUD-Dev	4047438048125	cm
	MOBOTIX HUB Plug In - MOBOTIX CLOUD Device License for		cm
	Activates another camera in the MOBOTIX CLOUD support in Milestone XProtect • License is activated via the MOBOTIX License Portal • License is not transferable • One license per Milestone XProtect VMS is required. • Requires a MOBOTIX CLOUD Base license • 4 cameras are included in the Base license • Additional cameras	g	cm l

Base license • 4 cameras are included in the Base license • Additional cameras require a device licence per camera • Permanent License

\sim

Mx-SW-XPro-Config MOBOTIX HUB Plug In - MOBOTIX camera Configuration for	4047438047890	cm cm
Activates the configuration settings for MOBOTIX cameras in Milestone XProtect - Management Client offers camera specific configuration tabs for P3/P6/P7 and MOVE cameras - License is activated via the MOBOTIX License Portal License is non- transferable - One license per Milestone • Activates the function for all MOBOTIX cameras registered in the system.	g	cm l



Mx-SW-XPro-ForSe	4047438047913	cm
MOBOTIX HUB Plug In - ForensicSearch for Milestone		cm
Activates the MOBOTIX ForensicSearch filters in Milestone XProtect Smart Client and supports the MOBOTIX event and app meta data for the forensic search - Intelligent search filter reduces the search in the playback to the essential - Search filter for camera apps as well as for MOBOTIX events - Support for camera models P6 / P7 and MOVE LPR models - License is activated via the MOBOTIX License Portal - License is not transferable - One license per Milestone XProtect VMS is required Activates the function for all MOBOTIX cameras registered in the system.	g	cm l



Mx-SW-XPro-Nurse-DB-Bas	4047438049306	cm	
MOBOTIX HUB Plug In - NurseAssist Dashboard Base License		cm	
Activates the MOBOTIX NurseAssist Dashboard in Milestone XProtect and supports the MOBOTIX C71 NurseAssist Camera functions • Main applications are • Live monitoring of patient conditions such as fall detection in a dashboard as a status tableau • Patient information • Virtual Patrol • Live image activation with intercom support • Slider too blurred the live image • Activity Log Book • Activity report for statistical analysis • Supports MOBOTIX C71 NurseAssist Kameras • License is activated via the MOBOTIX License Portal. • License is not transferable • One license per Milestone XProtect VMS is required. • With one license, Status Tableau from 4 NurseAssist cameras can be integrated in the layout • Additional NurseAssist cameras require one MOBOTIX Device license per camera - Permanent license	g	cm l	



Mx-SW-XPro-Nurse-DB-Dev	4047438049320	cm
MOBOTIX HUB Plug In - NurseAssist Dashboard Device		cm
Activates an additional camera for the MOBOTIX NurseAssist Dashboard in Milestone XProtect • Supports MOBOTIX C71 NurseAssist camera functions • Main application areas are • Live monitoring of patient conditions such as Fall detection in a dashboard as a status tableau • Patient information • Virtual tour • Live image activation with intercom support • Slider for live image blurring • Activity log book • Activity report for statistical evaluation • Supports MOBOTIX C71 NurseAssist cameras • Licence is activated via the MOBOTIX licence portal. • Licence is not transferable • One licence per NurseAssist camera required. • Requires a MOBOTIX NurseAssist Dashboard Base licence • With a MOBOTIX NurseAssist Dashboard Base licence, 4 NurseAssist cameras can be integrated in the Status Tableau • Additional NurseAssist cameras require a MOBOTIX Device licence per camera • Permanent licence	g	cm l



Mx-SW-XPro-SYNC-DB-Bas	4047438047852	cm
MOBOTIX HUB Plug In - MOBOTIX SYNC Base License for		cm
Activates the MOBOTIX SYNC Dashboard in Milestone XProtect Smart Client • Main applications are - Display of statistical values in diagrams • Display of lists of detected number plates • Support for MOBOTIX SYNC and Helix Vaxtor • License is activated via the MOBOTIX License Portal. • License is non-transferable • One license per Milestone XProtect VMS is required. • With one licence, 4 Grafana dashboards can be integrated in the layout • Additional Grafana dashboards require a MOBOTIX Sync Device license per dashboard. • Permanent licence	g	cm l

MO	BO	ГΙХ



Mx-SW-XPro-SYNC-DB-Dev 4047438048101 cm MOBOTIX HUB Plug In - MOBOTIX SYNC Device License for cm Activates another MOBOTIX SYNC Grafana Dashboard in the Milestone XPprotect g cm Activates another MOBOTIX SYNC Grafana Dashboard in the Milestone XPprotect g cm Smart Client - License is activated via the MOBOTIX License Portal - License is non-transferable · One license per Milestone XProtect VMS is required · Requires a l MOBOTIX SYNC Base license · With one licence, 4 Grafana dashboards can be integrated in the layout · Additional Grafana dashboards require a MOBOTIX Sync Device license per dashboard. · Permanent licence H	_			
Activates another MOBOTIX SYNC Grafana Dashboard in the Milestone XPprotect g cm Smart Client. • License is activated via the MOBOTIX License Portal. • License is non- transferable • One license per Milestone XProtect VMS is required. • Requires a l MOBOTIX SYNC Base license • With one licence, 4 Grafana dashboards can be integrated in the layout • Additional Grafana dashboards require a MOBOTIX Sync l		Mx-SW-XPro-SYNC-DB-Dev	4047438048101	cm
Smart Client. • License is activated via the MOBOTIX License Portal. • License is non- transferable • One license per Milestone XProtect VMS is required. • Requires a I MOBOTIX SYNC Base license • With one licence, 4 Grafana dashboards can be integrated in the layout • Additional Grafana dashboards require a MOBOTIX Sync I		MOBOTIX HUB Plug In - MOBOTIX SYNC Device License for		cm
		Smart Client. • License is activated via the MOBOTIX License Portal. • License is non- transferable • One license per Milestone XProtect VMS is required. • Requires a MOBOTIX SYNC Base license • With one licence, 4 Grafana dashboards can be integrated in the layout • Additional Grafana dashboards require a MOBOTIX Sync	g	cm l



Mx-SW-XPro-Th-DB-Bas	4047438047838	cm
MOBOTIX HUB Plug In - ThermalDashboard Base License for		cm
Activates the MOBOTIX Thermal Dashboard in Milestone XProtect and supports the MOBOTIX Thermal Camera functions • Main applications are • Live monitoring and surveillance of temperature-critical processes • Subsequent analysis of the temperature curve • Supports MOBOTIX Thermal Cameras P3, P6 and P7 • Restriction of the P3 to temperature graphs no hot spot areas • License is activated via the MOBOTIX License Portal. • License is not transferable • One license per Milestone XProtect VMS is required. • With one license, thermal graphs from 4 thermal cameras can be integrated in the layout • Additional thermal cameras require one MOBOTIX Device license per camera - Permanent license	g	cm l



Mx-SW-XPro-Th-DB-Dev	4047438048088	cm
MOBOTIX HUB Plug In - ThermalDashboard Device License		cm
Activates another camera in the MOBOTIX Thermal Dashboard in Milestone XProtect and supports the MOBOTIX Thermal Camera functions • Supports MOBOTIX Thermal Cameras P3, P6 and P7 • Restriction of the P3 to temperature graphs no hot spot areas • License is activated via the MOBOTIX License Portal. • License is not transferable • One license per Milestone XProtect VMS is required. • Requires a MOBOTIX Thermal Dashboard Base license • With one license, thermal graphs from 4 thermal cameras can be integrated in the layout • Additional thermal cameras require one MOBOTIX Device license per camera - Permanent license	g	cm l



Mx-SYNC-P-TM	4047438049542	cm
MOBOTIX SYNC Traffic Management Plug-In		cm
Extends the MOBOTIX SYNC Server functionality with the following features: • average speed at which vehicles went through a zone • calculate the dwell time for vehicles in a zone • both calculated based on records of entry/exit cameras	g	cm l



Mx-SYNC-P-YM	4047438049504	cm
MOBOTIX SYNC Yard Management Plug-In		cm
Extends the MOBOTIX SYNC Server functionality with the following features: • extended functions for access control • records of person categories, persons, and assigned authorizations • anti-passback • real-time attendance report • analysis on common routes and vehicle traceability (via REST API)	g	cm l

4047438047548

g

cm

cm

cm l



Mx-SYNC-S-BAS MOBOTIX SYNC Server

Store metadata and attached images generated by MOBOTIX Certified Apps (e.g. Vaxtor ALPR / OCR Apps) or other compatible data sources • 4 camera device licenses included • additional camera device licenses via additional license on demand • Monitor incoming license plates / metadata (e.g. plate reads) in real time • Search and filter existing license plates / metadata based on content such as Plate, Country, Camera, Zone, Make, Model, Color, Direction, etc. • Download and export customized license plate lists and search results • Management of cameras includes: • camera zones • manage and synchronize denied & granted license plate list • assign actuators (incl. camera I/Os) • manage data retention policies separately for images and metadata • supports GDPR measures with dedicated reports and data deletion • granular user and group permissions • login management including LDAP integration • audit trail of all interactions on the system including actions made by cameras • Send notifications (e.g. via E-Mail) • SYNC server license with runtime of 3 years after activation



Mx-SYNC-S-DEV	4047438047562	cm
MOBOTIX SYNC Camera Device License		cm
1 camera device license per additional camera device • Enables adding camera devices to the server/client on demand • *4 camera device licenses included in the server base license	g	cm l



Mx-SYNC-S-CLI	4047438047579	cm
MOBOTIX SYNC Client		cm
Redundant operation and data storage for applications with discontinuous connection to the server (e.g. mobile applications) • active server connection enables continous data synchronization	g	cm l



Mx-SYNC-P-GRA	4047438047593	cm
MOBOTIX SYNC Grafana Plug-In		cm
Visualization and consolidation of incoming metadata in customized dashboards including: • statistic insights • data queries • annotations • create and manage alerts / post-actions • exports	g	cm l

Warranty Extensions

Warranty Extensions

		Article No. / Name / Description	EAN / HS / weight	dimen.	
ſ		Mx-WE-DTVS-1	4047438031974	cm	
	MOBOTIX WARRANTY®	1 Year Warranty Extension For Dual Thermal Systems S74 5+1 Years warranty for MOBOTIX 7 and Mx6 Dual Thermal video systems • Notes: The warranty extension applies to a S74 or S16 DualFlex with two attached thermal sensor modules. The warranty extension can only be granted if the serial numbers o the camera and the connected thermal sensor modules are forwarded to MOBOTIX.	5	cm cm l	



	Mx-WE-DTVS-2	4047438031981	cm
۲	2 Years Warranty Extension For Dual Thermal Systems S74		cm
•	5+2 Years warranty for MOBOTIX 7 and Mx6 Dual Thermal video systems • Notes: The warranty extension applies to a S74 or S16 DualFlex with two attached thermal sensor modules. The warranty extension can only be granted if the serial numbers of the camera and the connected thermal sensor modules are forwarded to MOBOTIX.	g	cm l



Mx-WE-DTVS-3		4047438031998	cm
	3 Years Warranty Extension For Dual Thermal Systems S74		cm
	5+3 Years warranty for MOBOTIX 7 and Mx6 Dual Thermal video systems • Notes: The warranty extension applies to a S74 or S16 DualFlex with two attached thermal sensor modules. The warranty extension can only be granted if the serial numbers of the camera and the connected thermal sensor modules are forwarded to MOBOTIX.	g	cm l



Mx-WE-IVS-1	4047438031820	cm
1 Year Warranty Extension For Indoor Video Systems		cm
5+1 Years Warranty For Indoor Video Systems (MOBOTIX 7, Mx6 Indoor series, MxThinClient, MxSwitch) • Note: The warranty can be granted only if the serial number of the product is provided to MOBOTIX.	g	cm l



Mx-WE-IVS-2	4047438031837	cm
2 Years Warranty Extension For Indoor Video Systems		cm
5+2 Years Warranty For Indoor Video Systems (MOBOTIX 7, Mx6 Indoor series, MxThinClient, MxSwitch) • Note: The warranty can be granted only if the serial number of the product is provided to MOBOTIX.	g	cm l

	Мх
MOBOTIX WARRANTY® YEARS	3 Y 5+3 MxT nun

Mx-WE-IVS-3	4047438031844	cm
3 Years Warranty Extension For Indoor Video Systems		cm
5+3 Years Warranty For Indoor Video Systems (MOBOTIX 7, Mx6 Indoor series, MxThinClient, MxSwitch) • Note: The warranty can be granted only if the serial number of the product is provided to MOBOTIX.	g	cm l



]	Mx-WE-OVS-1	4047438031875	cm
	1 Year Warranty Extension For Outdoor Video Systems		cm
	5+1 Year Warranty For Outdoor Video Systems (MOBOTIX 7, Mx6 Outdoor series, MxDisplay) • Note: The warranty can be granted only if the serial number of the product is provided to MOBOTIX.	g	cm l



Mx-WE-OVS-2	4047438031882	cm
2 Years Warranty Extension For Outdoor Video Systems		cm
5+2 Years Warranty For Outdoor Video Systems (MOBOTIX 7, Mx6 Outdoor series, MxDisplay) • Note: The warranty can be granted only if the serial number of the product is provided to MOBOTIX.	g	cm l



Mx-WE-OVS-3	4047438031899	cm
3 Years Warranty Extension For Outdoor Video Systems		cm
5+3 Years Warranty For Outdoor Video Systems (MOBOTIX 7, Mx6 Outdoor series, MxDisplay) • Note: The warranty can be granted only if the serial number of the product is provided to MOBOTIX.	g	cm l



Mx-WE-STVS-1	4047438031929	cm
1 Year Warranty Extension For Single Thermal Systems		cm
5+1 Years warranty for MOBOTIX 7 and Mx6 thermal video systems • Notes: The warranty extension covers a S74 or S16 DualFlex with a maximum of one connected thermal sensor module or an M73 or M16 Thermal / Thermal TR. The warranty extension includes an additional optical sensor module used with the camera, but can only be granted if the serial numbers of the camera and the connected modules are passed to MOBOTIX.	g	cm l



]	Mx-WE-STVS-2	4047438031936	cm
	2 Years Warranty Extension For Single Thermal Systems		cm
	5+2 Years warranty for MOBOTIX 7 and Mx6 thermal video systems • Notes: The warranty extension covers a S74 or S16 DualFlex with a maximum of one connected thermal sensor module or an M73 or M16 Thermal / Thermal TR. The warranty extension includes an additional optical sensor module used with the camera, but can only be granted if the serial numbers of the camera and the connected modules are passed to MOBOTIX.	g	cm l

	Mx-WE-STVS-3	4047438031943	cm
ΜΟΒΟΤΙΧ	3 Years Warranty Extension For Single Thermal Systems		cm
WARRANTY® YEARS	5+3 Years warranty for MOBOTIX 7 and Mx6 thermal video systems • Notes: The warranty extension covers a S74 or S16 DualFlex with a maximum of one connected thermal sensor module or an M73 or M16 Thermal / Thermal TR. The warranty extension includes an additional optical sensor module used with the camera, but can only be granted if the serial numbers of the camera and the connected modules are passed to MOBOTIX.	g	cm l

Other

Beyond Human Vision



All prices are Manufacturer's suggested retail prices, net, ex works. Information subject to change without notice. HS = Harmonized System Code DG = Discount Group MOBOTIX • 24.01.2025 • MOBOTIX accepts no liability arising from printing errors, mistakes and changes. • Revision 24.01.2025

мовотіх

Training Courses

Article No. / Name / Description	EAN / HS / weight	dimen.
Mx-SE-Advanced	4047438049689	cm
MOBOTIX Seminar Advanced Course 1 (IoT) - 1 day training		cm
Classroom Training • This one-day seminar covers the in-depth configuration of a MOBOTIX camera system and advanced features of the MxManagementCenter video management software • In this comprehensive hands-on training, you will learn how to optimize settings and manage demanding IP video projects • Includes "Video Security Professional" certificate.		cm l



Mx-SE-GDPR-DE	4047438049757	cm
MOBOTIX Seminar Datenschutz Video - ONLY in German		cm
Classroom Training - Datenschutz Video • ONLY available in German language	g	cm
		l



Mx-SE-Grund-Video-DE	4047438049696	cm
MOBOTIX Seminar Videosicherheitstechnik - ONLY in		cm
Grundkurs Videosicherheitstechnik • ONLY available in German language	g	cm
		l



Mx-SE-HTTP-API	4047438049672	cm
MOBOTIX Seminar HTTP API & MxMessageSystem - 1 day		cm
Classroom Training • This one-day seminar focuses on the use of the HTTP API and the MXMessageSystem via network and MxBus • Connection of the MOBOTIX 7 apps to the event logic of the IoT system • incl. "Integration Professional" certificate.	g	cm l



-			
	Mx-SE-HUB-S-D	4047438049719	cm
	MOBOTIX Hub Sales & Design Seminar - 1 day online		cm
	Online training - This online training provides participants with the knowledge and skills they need to design MOBOTIX Hub video management systems. The aim is to effectively support customers' surveillance requirements and optimize the overall profitability of the video surveillance system - Prerequisite basic video security technology course - Includes "MOBOTIX Hub Sales & Design Specialist" certificate	g	cm l

NЛ	\cap	D	\sim	т	IX

Г			
	Mx-SE-HUB-Tec-DE	4047438049740	cm
	MOBOTIX Seminar HUB Technical Specialist L1 - ONLY in		cm
	Onlinetraining HUB Technical Specialist L1 • ONLY available in German language	g	cm
			l



Mx-SE-HUB-Tec1-EN	4047438049726	cm
MOBOTIX Seminar HUB Technical Specialist L1 - 2 days		cm
Online Training - This two day online training consists of a series of hands-on exercises in which participants practice configuring a MOBOTIX Hub video management system. Step-by-step instructions and a professional trainer will guide participants in configuring systems according to sample specifications.ü Prerequisite Basic Video Security Technology Course and MOBOTIX Sales & Design • Incl. *MOBOTIX Hub Technical Specialist L1" certificate.	g	cm l



Mx-SE-HUB-Tec2-EN	4047438049733	cm
MOBOTIX Seminar HUB Technical Specialist L2 - 2 days		cm
Online Training - This two day online training consists of a series of hands-on exercises in which participants practice configuring a MOBOTIX Hub video management system. Step-by-step instructions and a professional trainer will guide participants in configuring systems according to sample specifications.ü Prerequisite Basic Video Security Technology Course and MOBOTIX Sales & Design and HUB Technical Specialist L1 • Incl. "MOBOTIX Hub Technical Specialist L2" certificate.	g	cm l



Mx-SE-MOVE-Expert	4047438049702	cm
MOBOTIX Seminar MOVE System Expert - Online training		cm
Online training - This training is offered in two parts. First, participants work through an intensive system workshop on eCampus. The workshop is divided into several lessons, which are completed within a week at your own pace. Following this, further live training sessions are offered online, in which specific topics are discussed. There is also the opportunity to ask current questions and receive the latest updates Incl. "MOBOTIX MOVE System Specialist" certificate	g	cm l



_			
	Mx-SE-Smart-Auto	4047438049641	cm
	MOBOTIX Seminar Smart Automation Workshop		cm
	Classroom Training - In the seminar "Smart Automation Workshop" you will learn • Concept and development of MQTT • MQTT Broker and first client accesses • Camera as MQTT client and switching of MQTT actuators • The app service for MOBOTIX IoT cameras - Configuration and use of individual camera apps • Incl. certificate "Smart Automation Professional"	g	cm l



Mx-SE-Thermal	4047438049665	cm
MOBOTIX Seminar Thermal - 1 day training course		cm
Classroom Training • In the "Thermal imaging technology" seminar, you will learn about the MOBOTIX thermal imaging camera product portfolio. It also covers the basics of thermal cameras and sample applications. Each participant can deepen their knowledge in practical exercises with a thermal imaging camera. • incl. certificate "MOBOTIX certified installer of thermal imaging systems".	g	cm l

Mx-SE-VDS-EN54	4047438049658
MOBOTIX Seminar VDS & EN54 - 1 day classroom training	
Classroom Training - In the seminar "VdS&EN54" you will learn about the EN54- certified thermal system from MOBOTIX for early fire detection • Details about the necessary requirements to couple the MOBOTIX thermal camera with a fire alarm system • Prerequisite "Basic Course Video Security Technology" and "Advanced Course 1 Video Security Technology" • Incl. certificate "MOBOTIX certified installer of VdS-compliant early fire detection systems"	g

Professional Services

|--|

Article No. / Name / Description	EAN / HS / weight	dimen.	
Password-Reset-Software	4047438035392	cm	
Professional Services Password Reset Software		cm	
This password reset is an encrypted, time limited (will expire after 30 days) software file, specific for the factory IP of the camera directly on–site at your customers location.	g g	cm l	



	PS-Field-Service-Day	4047438035347	cm
	Professional Services Field Engineering & On-Site Support,		cm
)	Available for MOBOTIX systems of any size and for all MOBOTIX hardware and software products; fixed price flat rate for one working day. • Field Engineering: System configuration, commissioning and user training directly on site. Complete configuration and customization. • On-site Support: One working day for on-site support and troubleshooting directly at the project site. Professional health and storage check, troubleshooting through reconfiguration and re-configuration, on- site user training.	g	cm l



PS-Field-Service-Day-100	4047438048149	cm
Professional Services Onsite Field Engineering / Project		cm
Onsite Field Engineering / Project Commissioning for projects of over 100+ MOBOTIX cameras (excludes travel costs)	g	cm l



PS-Field-Service-Half-Day	4047438035354	cm
Professional Services Field Engineering & On-Site Support,		cm
Available for MOBOTIX systems of any size and for all MOBOTIX hardware and software products; fixed price flat rate for half a working day. • Field Engineering: System configuration, commissioning and user training directly on site. Complete configuration and customization. • On-site Support: One working day for on-site support and troubleshooting directly at the project site. Professional health and storage check, troubleshooting through reconfiguration and re-configuration, on- site user training.	g	cm l



PS-PreConfig-9plus1free	4047438048163	cm
Professional Services Every 10th Pre-Configuration per PO		cm
Every 10th Pre-Configuration per PO is free (Buy 9 get 1 Free)	g	cm
		l

N/1 (٦R	OT	'ΙΥ

cm cm

cm ι

\frown	PS-PreConfig-IoT	4047438035316
	Professional Services Pre-Configuration per IoT-Camera Pre-Configuration of all MOBOTIX IoT Cameras incl. Function Guarantee direct from production	g



PS-PreConfig-IoT-Doorstation	4047438035323	cm
Professional Services Pre-Configuration per Doorstation		cm
Pre-Configuration of all MOBOTIX DoorStations incl. Function Guarantee direct from production	g	cm l



PS-PreConfig-MxMove	4047438035330	cm
Professional Services Pre-Configuration per MOVE-Camera		cm
Pre-Configuration of all MOBOTIX MOVE Cameras incl. Function Guarantee direct from production	g	cm l



PS-Remote-Service-Half-Hour	4047438035385	cm
Professional Services Remote Support Half-Hourly Rate		cm
Half Hour professional troubleshooting, rectification and system optimization via secure IP remote connection by MOBOTIX specialists	g	cm l



PS-Remote-Service-Hour	4047438035378	cm
Professional Services Remote Support Hourly Rate		cm
One Hour professional troubleshooting, rectification • and system optimization via secure IP remote connection by MOBOTIX specialists	g	cm l



PS-Remote-Support-Opt	4047438048156	cm
Professional Services Remote Support System Optimization		cm
Remote Support System Optimization • 1 hr Remote Support free for every 20 Pre- Configurations per PO	g	cm l

MOBOTIX	

cm cm

cm ι

	PS-Travelcost Professional Services Travel & Accommodation Costs	4047438035361
	Costs for travel expenses of the MOBOTIX specialist. Maximum 2000€.	g



PS-Travelcost-plus	4047438048170	cm
Professional Services Increased Travel & Accommodation		cm
Increase the maximum chargeable for travel costs to €3000	g	cm
		l